LEWISVILLE ISD FACILITIES ASSESSMENT STUDY

November, 2023

2023

ASSESSMENT DEFINITIONS

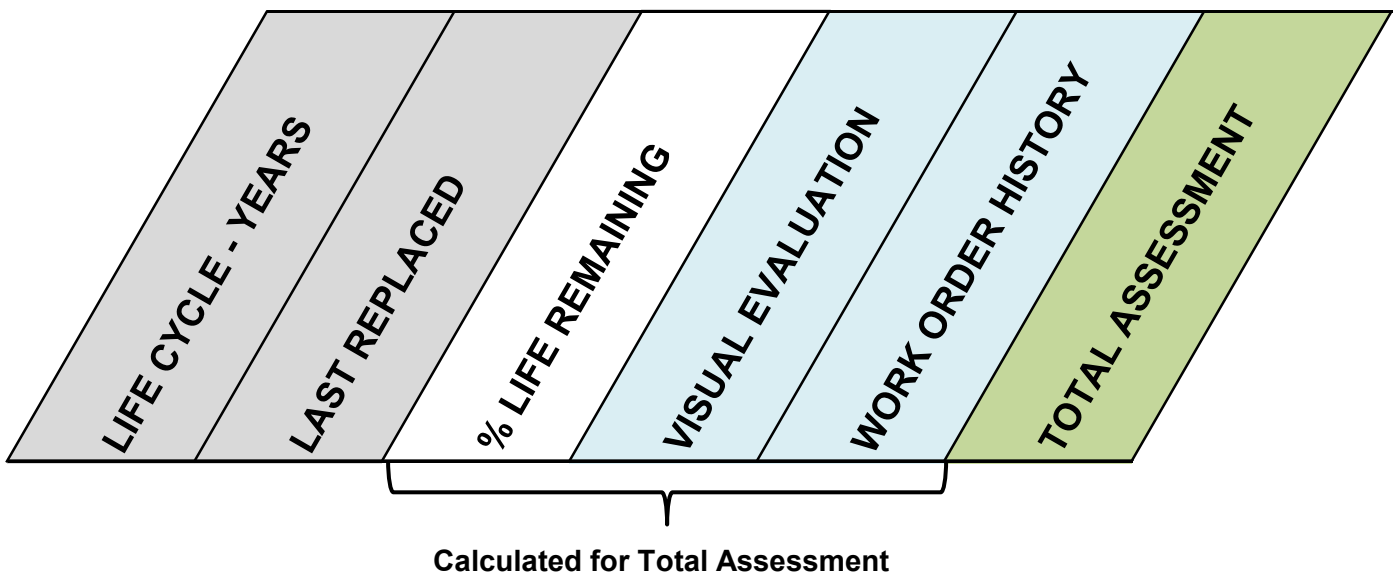

LIFE CYCLE - YEARS

The length of time measured in years that a product, material, or system is expected to perform under normal usage before needing replacement.

LAST REPLACED

Denotes the year that the product, material, or system was last replaced.

% LIFE REMAINING

The amount of service life, expressed as a percentage, that a product, material, or system has remaining based on the ratio of an item's age to its expected life cycle.

VISUAL EVALUATION

The score given by Facility Services personnel after visual evaluation of a product, material, or system. The score of each visual evaluation is based on the % Life Remaining. The item is then scored as to how it is performing relative to the expected life cycle.

WORK ORDER HISTORY

This score consists of five years of Work Order History which includes labor and materials cost associated with maintaining a system. This data was used to create a median cost per square foot for the five year period.

The number in this column represents the benefit or penalty the Work Order History has on the % Life Remaining and Visual Evaluation scores.

TOTAL ASSESSMENT

The Total Assessment Score is based on the average of the % Life Remaining and Visual Evaluation scores, plus the Work Order History benefit or penalty.

New this year are lines tracking the PLAM (Plastic Laminate), Emergency Responder Radio System (ERRS) and Storm Shelters.

This document is for Lewisville ISD use only and is subject to change. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Lewisville Independent School District.

ASSESSMENT SUMMARY

ELEMENTARY SCHOOLS

Current Year 2023

	BLUEBONNET	BRIDLEWOOD	CAMEY	CASTLE HILLS	CENTRAL	COYOTE RIDGE	CREEKSIDE	DEGAN	DONALD	ETHRIDGE	FLOWER MOUND	FOREST VISTA	GARDEN RIDGE
Year Built	2000	1998	2014	2002	1957	2005	1989	1973	1989	1990	1985	1997	1992
Age	23	25	9	21	66	18	34	50	34	33	38	26	31
Foundation	-	-	-	-	4	-	-	20	-	-	24	-	-
HVAC - Original	95	100	61	-3	85	8	86	87	20	24	10	100	44
HVAC - Additions	30	30	-	-	85	-	-	46	-3		-3	100	-
HVAC - Additions	-	-	-	-	80	-	-	-5	-	-	-	-	-
HVAC - Additions	-	-	-	-	3	-	-	-	-	-	-	-	-
HVAC - Controls	95	90	55	-3	90	75	80	85	20	25	10	90	45
Ceiling and Lights - Original	95	90	55	-3	85	10	80	85	20	25	10	90	40
Ceiling and Lights - Additions	28	28		-	85	-	-	45	-3	-	-3	90	-
Ceiling and Lights - Additions	-	-		-	85	-	-	-3	-	-	-	-	-
Ceiling and Lights - Additions	-	-		-	5	-	-	-	-	-	-	-	-
Roof - Flat - Original	95	100	59	-2	-	12	-	36	73	80	16	100	51
Roof - Shingled or Standing Seam	-	-	-	-	-3	99	21	-		24	-	-	51
Roof - Additions	30	30	-	-	87	-	-	30	-3	-	-3	100	-
Roof - Additions	-	-	-	-	5	-	-	-3	-	-	-	-	-
Electrical Panels - Original	22	18	76	31	19	44	38	95	-5	-3	44	14	1
Electrical Panels - Addition	-	-	-	-	87	-	-	-	-	-	-	-	-
Elevator	-	-	46	-	-	31	-	-	-	-	-	-	-
Fire Safety - Fire Alarm	95	90	36	-3	5	11	40	85	-2	0	10	90	26
Fire Safety - Sprinkler System	58	56	76	68	46	48	37	66	17	60	59	58	39
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	-	-	-	-	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	-	-	-	-	-
Food Service Boilers - Original	100	90	55	40	65	10	80	85	65	85	85	90	45
Food Service Freezers - Original	100	90	55	-3	5	10	35	85	20	25	10	90	45
Generator	100	93	78	-	90	55	88	93	-	-	-	93	73
Lift Stations	-	-	-	-	-	-	-	-	-	-	-	-	-
Playground- Shade Structure - Main	30	50	60	75	-	-	70	-	25	100	50	25	-
Playground - Main	70	85	58	-3	3	10	10	10	25	60	45	80	35
Playground- Shade Structure - Pre-K	-	-	55	-	-	-	-	-	-	-	-	-	55
Playground - Pre-K	-	35	58	-	5	60	-	60	45	60	45	63	75
Perf Arts - Curtains	100	50	55	-3	5	10	80	85	75	30	5	90	80
Perf Arts - Stage Lghtng/panel	100	92	64	16	24	28	84	88	84	80	28	92	56
Flooring - Classrooms - Carpet	100	-	-	-	80	95	73	-		-	73	90	-
Flooring - Classrooms - VCT/LVT	100	90	55	85	-	10	80	85	70	70	60	-	45
Flooring - Classrooms - Additions	100	-	-	-	-	-	-	5	-	-	-	90	-
Flooring - Corridors-Carpet	-	-	-	-	-	-	-	-	-	-	-	-	-
Flooring - Corridors-VCT	100	90	55	-3	5	10	80	85	40	70	70	90	45
Flooring - Library	100	87	55	80	80	95	73	80	70	70	60	87	45
Flooring - Offices	100	90	55	85	80	93	73	80	70	27	60	87	45
Flooring - Cafeteria	100	80	55	90	5	10	80	85	70	70	70	90	45
Flooring - Cafeteria - Addition	-	-	-	-	5	-	-	-	-	-	-	-	-
Flooring - Kitchen	47	45	82	49	62	45	32	3	32	34	24	42	34
Flooring - Kitchen - Addition	-	-	-	-	62	-	-	-	-	-	-	-	-
Flooring - Gym - Original	100	90	55	-3	5	10	80	85	70	70	70	90	43
Flooring - Gym - Addition	-	-	-	-	5	-	-	-	-	-	-	-	-
Plastic Laminate	100	38	78	48	53	55	20	45	45	63	85	33	73
Doors	100	90	55	-3	5	10	24	85	13	-33	-45	90	-28
Door Hardware	100	90	55	-3	5	10	80	85	85	-33	-3	90	85
Casework (Built Ins)	100	90	55	-3	5	10	80	85	-35	-33	-45	90	-28
Restrooms - Faculty	100	90	55	-3	5	10	80	85	75	75	75	90	85
Restrooms - Student	100	90	55	-3	5	10	80	85	75	75	45	90	85
Restrooms - Addition	100	90	-	-	85	-	-	25	75	-	75	90	-
Restrooms - Addition	-	-	-	-	5	-	-	-3	-	-	-	-	-
Marquee	23	17	70	53	37	40	97	37	83	31	27	13	-1
Paving - Parking Lots	54	50	82	44	62	62	32	3	32	34	24	48	38
Paving - Parking - Asphalt	-	-	-	-	-	-	-35	8	-	-	-	-	-
Paving - Sidewalks	39	38	78	39	51	50	20	-13	15	18	5	35	23
Exterior Lighting - Original	95	70	55	-3	5	10	80	60	75	80	87	85	70
Exterior Lighting - Other areas	-	-	-	-	-	-	-	-	-	-	-	-	-
Paint - Commons	100	87	40	13	80	60	73	80	67	27	67	87	27
Paint - Cafeteria	100	87	40	33	87	60	73	80	67	27	7	87	27
Paint - Library	100	87	40	33	-13	33	73	80	67	47	7	87	27
Paint - Gyms	100	90	55	50	5	70	80	85	75	45	45	90	45
Paint - Exterior	100	90	55	-3	5	10	20	85	65	45	20	40	45
Paint - Hallways	100	90	58	-3	5	70	80	85	75	50	75	90	45

ASSESSMENT SUMMARY

ELEMENTARY SCHOOLS

Current Year 2023

	HEBRON VALLEY	HERITAGE	HICKS	HIGHLAND VILLAGE	HOMESTEAD	INDEPENDENCE	INDIAN CREEK	LAKELAND	LEWISVILLE	LIBERTY	LILLIE JACKSON	MCAULIFFE	Memorial STEM	MILL STREET
Year Built	1989	1993	2004	1981	1999	2008	1985	2008	2010	2002	2005	1987	2021	2019
Age	34	30	19	42	24	15	38	15	13	21	18	36	2	4
Foundation	-	-	-	-	-	-	24	-	-	-	-	27	96	92
HVAC - Original	20	48	4	73	100	24	12	20	29	0	8	37	100	93
HVAC - Additions	0	17	-	73	-	-	-	-	-	15	-	-	-	-
HVAC - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-
HVAC - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-
HVAC - Controls	25	55	5	65	95	25	20	25	35	0	75	35	90	80
Ceiling and Lights - Original	23	55	5	68	95	25	18	25	35	0	10	33	90	80
Ceiling and Lights - Additions	0	18	-	68	-	-	-	-	-	18	-	-	-	-
Ceiling and Lights - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ceiling and Lights - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Roof - Flat - Original	83	100	-	60	100	-	21	-	-	0	5	86	100	93
Roof - Shingled or Standing Seam	83	90	6	-	-	13	-	30	22	-	4	-	100	100
Roof - Additions	0	100	-	60	-	-	0	-	-	14	-	-	-	-
Roof - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Electrical Panels - Original	-5	3	37	81	22	46	45	40	52	32	43	54	100	95
Electrical Panels - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Elevator	-	-	25	-	-	45	-	44	56	-	-	-	100	-
Fire Safety - Fire Alarm	21	85	6	37	95	29	24	32	28	0	8	19	100	89
Fire Safety - Sprinkler System	76	28	72	86	61	81	80	58	87	60	66	20	100	100
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Food Service Boilers - Original	75	50	80	30	25	25	25	25	30	85	5	85	90	80
Food Service Freezers - Original	25	55	5	65	95	25	20	25	35	0	10	30	90	80
Generator	-	-	53	83	95	63	-	63	68	-	55	65	95	90
Lift Stations	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Playground- Shade Structure - Main	80	60	-	80	30	30	-	-	-	85	-	-	90	-
Playground - Main	65	50	5	10	90	28	28	25	35	0	-	25	90	80
Playground- Shade Structure - Pre-K	-	-	-	-	-	95	-	-	-	80	10	95	90	85
Playground - Pre-K	65	35	5	-	-	35	55	-	-	75	10	95	90	80
Perf Arts - Curtains	75	30	5	65	95	25	75	25	35	0	10	3	90	80
Perf Arts - Stage Lghtng/panel	80	80	20	72	96	40	80	33	48	11	24	37	92	84
Flooring - Classrooms - Carpet	-	70	13	-	-	3	-	3	13	90	-	-		-
Flooring - Classrooms - VCT/LVT	80	-	-	65	40	-	85	25	35	90	10	35		80
Flooring - Classrooms - Additions	-	70	-	-	-	-	-	-	-	-1	-	-	-	-
Flooring - Corridors-Carpet	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Flooring - Corridors-VCT	85	70	5	65	35	25	85	25	35	0	10	15	90	80
Flooring - Library	80	70	13	65	93	3	85	3	13	87	-8	13	87	73
Flooring - Offices	80	70	7	53	93	3	80	3	13	90	-8	35	87	73
Flooring - Cafeteria	85	70	5	65	35	25	85	25	35	0	10	35	90	92
Flooring - Cafeteria - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Flooring - Kitchen	31	38	62	16	39	70	24	70	74	54	64	28	96	92
Flooring - Kitchen - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Flooring - Gym - Original	85	70	5	65	50	25	85	25	35	0	10	5	90	90
Flooring - Gym - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Plastic Laminate	48	23	49	83	98	58	88	63	68	48	55	68	95	90
Doors	-35	-25	5	70	95	25	-45	25	35	0	10	-40	90	80
Door Hardware	-35	-25	5	70	95	25	-45	25	35	0	10	-40	90	80
Casework (Built Ins)	-35	-25	5	65	95	25	-45	25	35	0	10	-40	90	80
Restrooms - Faculty	75	75	5	65	95	25	50	25	35	0	10	35	90	80
Restrooms - Student	75	75	5	65	95	25	50	28	35	0	10	35	90	80
Restrooms - Addition	75	20	-		-	-	0	-	-	20	-	-	-	-
Restrooms - Addition	-	-	-	65	-	-	-	-	-	-	-	-	-	-
Marquee	33	63	31	47	53	50	67	50	48	30	35	13	87	80
Paving - Parking Lots	32	40	56	72	49	70	24	70	74	58	64	28	96	92
Paving - Parking - Asphalt	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Paving - Sidewalks	15	25	53	0	40	63	10	63	68	48	40	10	95	90
Exterior Lighting - Original	90	55	90	65	95	93	90	25	35	-3	10	0	90	80
Exterior Lighting - Other areas	-	-	-	-	-	-	-	-	-	-	-	55	-	-
Paint - Commons	27	67	-13	53	93	60	67	3	67	60	-10	13	87	73
Paint - Cafeteria	100	67	-13	53	93	47	67	3	60	40	-10	13	87	73
Paint - Library	27	67	-13	53	93	47	40	3	100	40	60	13	87	73
Paint - Gyms	60	80	5	65	95	25	55	25	35	70	10	35	90	80
Paint - Exterior	45	80	75	65	90	25	20	25	35	0	80	0	90	80
Paint - Hallways	45	75	5	65	95	25	75	25	35	55	60	35	90	80

ASSESSMENT SUMMARY

ELEMENTARY SCHOOLS

Current Year 2023

	MORNINGSIDE	OLD SETTLERS	OWEN	PARKWAY	PETERS COLONY	POLSER	PRAIRIE TRAIL	ROCKBROOK	SOUTHRIDGE	TIMBER CREEK	VALLEY RIDGE	VICKERY	WELLINGTON
Year Built	1993	1994	1987	1995	2010	1995	1995	2003	1999	1978	1996	2003	1998
Age	30	29	36	28	13	28	28	20	24	45	27	20	25
Foundation	-	-	-	-	-	-	-	-	-	-	-	-	-
HVAC - Original	44	85	37	96	35	76	100	3	100	90	90	3	100
HVAC - Additions	-	85	-	-	-	-	100	19	-	48	22	-	100
HVAC - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-
HVAC - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-
HVAC - Controls	45	80	35	85	35	75	90	3	95	80	80	3	95
Ceiling and Lights - Original	45	80	35	85	33	75	90	3	95	85	80	3	95
Ceiling and Lights - Additions	-	80	-	-	-	-	90	18	-	85	20	-	95
Ceiling and Lights - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-
Ceiling and Lights - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-
Roof - Flat - Original	26	83	0	99	-	75	100	3	100	3	76	2	100
Roof - Shingled or Standing Seam	26	83	-	50	32	32	25	-	-	-	76	-	-
Roof - Additions	-	-2	-	-	-	-	22	20	-	45	76	78	100
Roof - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-
Electrical Panels - Original	2	3	40	7	52	7	14	30	21	96	13	35	19
Electrical Panels - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-
Elevator	-	-	-	-	53	-	-	-	-	-	-	-	-
Fire Safety - Fire Alarm	48	80	0	85	41	75	85	2	95	98	65	2	95
Fire Safety - Sprinkler System	20	40	86	52	87	39	22	61	61	100	50	64	56
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	-	-	-	-	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	-	-	-	-	-
Food Service Boilers - Original	45	80	70	85	35	30	90	3	55	85	30	55	95
Food Service Freezers - Original	45	80	30	85	35	75	90	3	95	60	80	3	95
Generator	73	90	68	90	68	88	95	-	98	90	90	60	98
Lift Stations	-	80	-	-	-	-	-	-	-	-	-	-	-
Playground- Shade Structure - Main	15	45	-	15	-	-	10	-	-	-	65	-	30
Playground - Main	35	70	10	60	35	50	50	3	60	45	75	3	95
Playground- Shade Structure - Pre-K	-	-	-	-	-	-	-	75	-	-	-	-	-
Playground - Pre-K	-	70	55	45	55	50	50	55	60	45	75	-	15
Perf Arts - Curtains	45	80	10	85	35	75	90	3	95	85	25	3	95
Perf Arts - Stage Lghtng/panel	56	84	48	88	48	80	88	15	96	88	84	20	96
Flooring - Classrooms - Carpet	-	80	35	-	-	-	-	-	-	85	-	-	93
Flooring - Classrooms - VCT/LVT	45	-	-	85	35	80	50	90	95	-	80	90	93
Flooring - Classrooms - Additions	-	80	-	-	-	-	-	-	-	-	-1	48	95
Flooring - Corridors-Carpet	-	-	-	-	-	-	-	-	-	-	-	-	-
Flooring - Corridors-VCT	45	80	35	85	35	45	90	3	95	85	80	3	95
Flooring - Library	45	73	13	80	13	67	90	90	93	80	80	87	93
Flooring - Offices	45	60	13	80	13	73	50	27	93	80	73	87	95
Flooring - Cafeteria	45	80	35	85	35	40	90	3	95	85	80	50	95
Flooring - Cafeteria - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-
Flooring - Kitchen	40	39	28	69	70	42	44	58	49	90	46	53	50
Flooring - Kitchen - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-
Flooring - Gym - Original	43	80	35	85	35	80	50	3	95	85	80	50	95
Flooring - Gym - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-
Plastic Laminate	25	90	68	93	68	90	95	50	98	90	33	50	98
Doors	-25	80	35	85	35	80	90	3	95	85	80	3	95
Door Hardware	-25	80	35	85	35	80	90	3	95	85	80	3	95
Casework (Built Ins)	-25	80	-40	85	35	80	90	3	95	85	80	3	95
Restrooms - Faculty	75	80	35	85	35	80	90	3	95	85	80	3	95
Restrooms - Student	75	80	35	85	35	80	90	3	95	85	80	3	95
Restrooms - Addition		80	-	-	-	-	90	20	-	85	18	78	95
Restrooms - Addition	-	-	-	-	-	-	-	-	-	-	-	-	-
Marquee	67	3	57	80	57	87	7	33	97	-4	80	33	13
Paving - Parking Lots	40	42	28	30	74	44	44	60	52	13	46	60	50
Paving - Parking - Asphalt	-	-	-	-	-	-	-	-	-	13	-	-	-
Paving - Sidewalks	25	28	15	23	68	30	30	50	40	30	33	50	38
Exterior Lighting - Original	45	80	35	75	28	80	85	3	95	85	80	60	95
Exterior Lighting - Other areas	-	-	-	-	-	-	-	-	-	-	-	-	-
Paint - Commons	27	73	13	80	13	73	87	33	93	80	73	-17	93
Paint - Cafeteria	27	73	13	80	13	73	87	33	93	80	73	-17	93
Paint - Library	27	73	93	80	13	73	87	73	80	80	73	53	93
Paint - Gyms	45	80	38	85	35	80	90	3	95	85	80	3	95
Paint - Exterior	45	80	70	85	35	80	90	3	95	85	70	3	70
Paint - Hallways	45	80	35	85	35	80	90	3	95	85	80	3	95

Bluebonnet ES

Year Built / Age 2000 / 23

Campus Square Footage 69,593

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023
FACILITY AGE RATING	**50**	**2000**	**54**				
Bluebonnet ES - HVAC - Original	**20**	**2022**	95	95		**95**	**RTU**
Bluebonnet ES - HVAC - 2008 Addition	**20**	**2008**	25	25	20%	**30**	**RTU**
Bluebonnet ES - HVAC Controls	**20**	**2022**	95	95		**95**	**Reliable**
Bluebonnet ES - Ceiling and Lights - Original	**20**	**2022**	95	95		**95**	**LED Douglas**
Bluebonnet ES - Ceiling and Lights - 2008	**20**	**2008**	25	30		**28**	**T-8**
Bluebonnet ES - Roof - Flat	**20**	**2022**	95	95		**95**	
Bluebonnet ES - Roof - Flat - 2008 Addition	**20**	**2008**	25	30	9%	**30**	
Bluebonnet ES - Electrical Switchgear	**30**	**2000**	23	23	-4%	**22**	**Square D**
Bluebonnet ES - Fire Safety - Fire Alarm	**20**	**2022**	95	95		**95**	**EST 3 Voice Evac**
Bluebonnet ES - Fire Safety - ERRS		**2023**				**-**	**Tracking only**
Bluebonnet ES - Fire Safety - Sprinkler System	**50**	**2000**	54	54	8%	**58**	**Building shifting - Riser Rm**
Bluebonnet ES - Food Service Boilers	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Food Service Freezers	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Generator	**40**	**2023**	100	100		**100**	**Generac - Diesel; 80KW**
Bluebonnet ES - Shade Structure - Main	**20**	**2009**	30	30		**30**	**Canopy scheduled for replaced 2022**
Bluebonnet ES - Playground - Main	**20**	**2017**	70	70		**70**	**Good shape**
Bluebonnet ES - Shade Structure - Pre-K	**-**					**-**	
Bluebonnet ES - Playground - Pre-K	**-**					**-**	
Bluebonnet ES - Perf Arts - Curtains	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Perf Arts - Stage Lighting/panel	**25**	**2023**	100	100		**100**	
Bluebonnet ES - Flooring - Classroom - Carpet	**15**	**2023**	100	100		**100**	**Carpet**
Bluebonnet ES - Flooring - Classrooms LVT	**20**	**2023**	100	100		**100**	**LVT**
Bluebonnet ES - Flooring - Clssrms LVT-2008 Add	**20**	**2023**	100	100		**100**	**LVT**
Bluebonnet ES - Flooring - Corridors	**20**	**2023**	100	100		**100**	**LVT**
Bluebonnet ES - Flooring - Library	**15**	**2023**	100	100		**100**	**Carpet**
Bluebonnet ES - Flooring - Offices	**15**	**2023**	100	100		**100**	**Carpet and LVT**
Bluebonnet ES - Flooring - Cafeteria	**20**	**2023**	100	100		**100**	**LVT**
Bluebonnet ES - Flooring - Kitchen	**50**	**2000**	54	40		**47**	**Terrazzo is cracking**
Bluebonnet ES - Flooring - Gym	**20**	**2023**	100	100		**100**	**RAF1**
Bluebonnet ES - Plastic Laminate	**40**	**2023**	100	100		**100**	
Bluebonnet ES - Doors	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Door Hardware	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Casework (Built Ins)	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Restrooms - Faculty	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Restrooms - Student	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Restrooms - 2008 Addition	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Marquee	**30**	**2000**	23	23		**23**	**LED Retro Fit**
Bluebonnet ES - Paving - Parking Lots	**50**	**2000**	54	54		**54**	
Bluebonnet ES - Paving - Sidewalks	**40**	**2000**	43	35		**39**	**Some buckling in front on roadside & pavers**
Bluebonnet ES - Exterior Lighting	**20**	**2022**	95	95		**95**	
Bluebonnet ES - Paint - Commons	**15**	**2023**	100	100		**100**	
Bluebonnet ES - Paint - Cafeteria	**15**	**2023**	100	100		**100**	
Bluebonnet ES - Paint - Library	**15**	**2023**	100	100		**100**	
Bluebonnet ES - Paint - Gyms	**20**	**2023**	100	100		**100**	
Bluebonnet ES - Paint - Exterior	**20**	**2023**	100	100		**100**	**Summer 2018 Exterior block power washed & sealed**
Bluebonnet ES - Paint - Hallways	**20**	**2023**	100	100		**100**	

Bridlewood ES

Year Built / Age 1998 / 25

Campus Square Footage 82,993

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023
FACILITY AGE RATING	**50**	**1998**	**50**				
Bridlewood ES - HVAC	**20**	**2021**	90	90	20%	**100**	**RTU**
Bridlewood ES - HVAC - 2008 Addition	**20**	**2008**	25	25	20%	**30**	**RTU**
Bridlewood ES - HVAC Controls	**20**	**2021**	90	90		**90**	**Reliable**
Bridlewood ES - Ceiling and Lights - Original	**20**	**2021**	90	90		**90**	**LED Watt Stopper**
Bridlewood ES - Ceiling and Lights - 2008	**20**	**2008**	25	30		**28**	**T5**
Bridlewood ES - Roof - Flat	**20**	**2021**	90	90	20%	**100**	
Bridlewood ES - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	20%	**30**	
Bridlewood ES - Electrical Switchgear	**30**	**1998**	17	17	6%	**18**	**Cutler Hammer**
Bridlewood ES - Fire Safety - Fire Alarm	**20**	**2021**	90	90		**90**	**EST 3 Voice Evac**
Bridlewood ES - Fire Safety - ERRS		**2021**				**-**	**Tracking only**
Bridlewood ES - Fire Safety - Sprinkler System	**50**	**1998**	50	50	11%	**56**	
Bridlewood ES - Food Service Boilers	**20**	**2021**	90	90		**90**	
Bridlewood ES - Food Service Freezers	**20**	**2021**	90	90		**90**	
Bridlewood ES - Generator	**40**	**2020**	93	93		**93**	**Kohler 42KW - Diesel**
Bridlewood ES - Shade Structure - Main	**20**	**2013**	50	50		**50**	**3 Shade Structures; Largest structure canopy replaced in 2020**
Bridlewood ES - Playground - Main	**20**	**2020**	85	85		**85**	**good shape**
Bridlewood ES - Shade Structure - Pre-K	**-**					**-**	
Bridlewood ES - Playground - Pre-K	**20**	**2010**	35	35		**35**	**fair shape**
Bridlewood ES - Perf Arts - Curtains	**20**	**2013**	50	50		**50**	
Bridlewood ES - Perf Arts - Stage Lghtng/panel	**25**	**2021**	92	92		**92**	**LED**
Bridlewood ES - Flooring - Classrooms - VCT	**20**	**2021**	90	90		**90**	**VCT**
Bridlewood ES - Flooring - Corridors	**20**	**2021**	90	90		**90**	**VCT**
Bridlewood ES - Flooring - Library	**15**	**2021**	87	87		**87**	**Carpet**
Bridlewood ES - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet**
Bridlewood ES - Flooring - Offices	**20**	**2021**	90	90		**90**	**VCT**
Bridlewood ES - Flooring - Cafeteria	**20**	**2019**	80	80		**80**	**VCT**
Bridlewood ES - Flooring - Kitchen	**50**	**1998**	50	40		**45**	**Terrazzo small cracking**
Bridlewood ES - Flooring - Gym	**20**	**2021**	90	90		**90**	**Resilient Athletic Flooring**
Bridlewood ES - Plastic Laminate	**40**	**1998**	38	38		**38**	**Light Gray**
Bridlewood ES - Door Hardware	**20**	**2021**	90	90		**90**	
Bridlewood ES - Doors	**20**	**2021**	90	90		**90**	
Bridlewood ES - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	
Bridlewood ES - Restrooms - Faculty	**20**	**2021**	90	90		**90**	
Bridlewood ES - Restrooms - Student	**20**	**2021**	90	90		**90**	
Bridlewood ES - Restrooms - 2008 Addition	**20**	**2021**	90	90		**90**	
Bridlewood ES - Marquee	**30**	**1998**	17	17		**17**	**LED 2018 bulbs only**
Bridlewood ES - Paving - Parking Lots	**50**	**1998**	50	50		**50**	**Concrete**
Bridlewood ES - Paving - Sidewalks	**40**	**1998**	38	38		**38**	**Concrete**
Bridlewood ES - Exterior Lighting	**20**	**2017**	70	70		**70**	**LED**
Bridlewood ES - Paint - Commons	**15**	**2021**	87	87		**87**	
Bridlewood ES - Paint - Cafeteria	**15**	**2021**	87	87		**87**	
Bridlewood ES - Paint - Library	**15**	**2021**	87	87		**87**	
Bridlewood ES - Paint - Gyms	**20**	**2021**	90	90		**90**	
Bridlewood ES - Paint - Exterior	**20**	**2021**	90	90		**90**	**Sparrow holes repaired 2023**
Bridlewood ES - Paint - Hallways	**20**	**2021**	90	90		**90**	

Camey ES

Year Built / Age 2014 / 9

Campus Square Footage 110,585

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2014**	**82**				
Camey ES - HVAC	**20**	**2014**	55	55	11%	**61**	**RTU**
Camey ES - HVAC Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Camey ES - Ceiling and Lights	**20**	**2014**	55	55		**55**	
Camey ES - Roof - Flat	**20**	**2014**	55	55	8%	**59**	
Camey ES - Electrical Switchgear	**30**	**2014**	70	70	8%	**76**	
Camey ES - Elevator	**25**	**2014**	64	55	-23%	**46**	**Thyssen Krupp**
Camey ES - Fire Safety - Fire Alarm	**20**	**2014**	55	55	-34%	**36**	**Edwards EST 2 - Limited Parts**
Camey ES - Fire Safety - ERRS	**-**					**-**	
Camey ES - Fire Safety - Sprinkler System	**50**	**2014**	82	82	-7%	**76**	
Camey ES - Food Service Boilers	**20**	**2014**	55	55		**55**	
Camey ES - Food Service Freezers	**20**	**2014**	55	55		**55**	
Camey ES - Generator	**40**	**2014**	78	78		**78**	**Generac - Diesel; 275KW**
Camey ES - Shade Structure - Main	**20**	**2015**	60	60		**60**	**repairs made 3/2022; sail shade structure**
Camey ES - Playground - Main	**20**	**2014**	55	60		**58**	**good shape (slide, tri-angle plate and climber replaced)**
Camey ES - Shade Structure - Pre-K	**20**	**2014**	55	55		**55**	**good shape**
Camey ES - Playground - Pre-K	**20**	**2014**	55	60		**58**	**Good condition**
Camey ES - Perf Arts - Curtains	**20**	**2014**	55	55		**55**	
Camey ES - Perf Arts - Stage Lighting/panel	**25**	**2014**	64	64		**64**	
Camey ES - Flooring - Classrooms	**20**	**2014**	55	55		**55**	**VCT**
Camey ES - Flooring - Corridors	**20**	**2014**	55	55		**55**	**VCT**
Camey ES - Flooring - Library	**20**	**2014**	55	55		**55**	**VCT**
Camey ES - Flooring - Offices	**20**	**2014**	55	55		**55**	**VCT**
Camey ES - Flooring - Cafeteria	**20**	**2014**	55	55		**55**	**VCT**
Camey ES - Flooring - Kitchen	**50**	**2014**	82	82		**82**	**Terrazzo**
Camey ES - Flooring - Gym	**20**	**2014**	55	55		**55**	**VCT**
Camey ES Plastic Laminate	**40**	**2014**	78	78		**78**	
Camey ES Doors	**20**	**2014**	55	55		**55**	
Camey ES Door Hardware	**20**	**2014**	55	55		**55**	
Camey ES Casework (Built-Ins)	**20**	**2014**	55	55		**55**	
Camey ES - Restrooms - Faculty	**20**	**2014**	55	55		**55**	
Camey ES - Restrooms - Student	**20**	**2014**	55	55		**55**	
Camey ES - Marquee	**30**	**2014**	70	70		**70**	
Camey ES - Paving - Parking Lots	**50**	**2014**	82	82		**82**	
Camey ES - Paving - Sidewalks	**40**	**2014**	78	78		**78**	
Camey ES - Exterior Lighting	**20**	**2014**	55	55		**55**	**LED**
Camey ES - Paint - Commons	**15**	**2014**	40	40		**40**	**Office areas painted 2019**
Camey ES - Paint - Cafeteria	**15**	**2014**	40	40		**40**	
Camey ES - Paint - Library	**15**	**2014**	40	40		**40**	
Camey ES - Paint - Gyms	**20**	**2014**	55	55		**55**	
Camey ES - Paint - Exterior	**20**	**2014**	55	55		**55**	
Camey ES - Paint - Hallways	**20**	**2014**	55	60		**58**	**Columns 2018**

Castle Hills ES

Year Built / Age 2002 / 21

Campus Square Footage 73,557

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023
FACILITY AGE RATING	**50**	**2002**	**58**				
Castle Hills ES - HVAC	**20**	**2002**	-5	0	-16%	**-3**	**RTU**
Castle Hills ES - HVAC Controls	**20**	**2002**	-5	0		**-3**	**Controls = I/net**
Castle Hills ES - Ceiling and Lights	**20**	**2002**	-5	0		**-3**	
Castle Hills ES - Roof - Flat	**20**	**2002**	-5	0	6%	**-2**	
Castle Hills ES - Electrical Switchgear	**30**	**2002**	30	30	4%	**31**	
Castle Hills ES - Fire Safety - Fire Alarm	**20**	**2002**	-5	0		**-3**	**Edwards IO 6/2019 - Only Panel was replaced**
Castle Hills ES - Fire Safety - ERRS	-					-	
Castle Hills ES - Fire Safety - Sprinkler System	**50**	**2002**	58	58	17%	**68**	
Castle Hills ES - Food Service Boilers	**20**	**2011**	40	40		**40**	
Castle Hills ES - Food Service Freezers	**20**	**2002**	-5	0		**-3**	
Castle Hills ES - Generator	-					-	
Castle Hills ES - Shade Structure - Main	**20**	**2018**	75	75		**75**	**Shade structure fabric replaced 2018; has a few holes**
Castle Hills ES - Playground - Main	**20**	**2002**	-5	0		**-3**	**Playground good (some Equip. replaced); poor drainage due to slope - do not remove concrete borders; ADA Ramp added**
Castle Hills ES - Shade Structure - Pre-K	-					-	
Castle Hills ES - Playground - Pre-K	-					-	
Castle Hills ES - Perf Arts - Curtains	**20**	**2002**	-5	0		**-3**	
Castle Hills ES - Perf Arts - Stage Lighting/panel	**25**	**2002**	16	16		**16**	
Castle Hills ES - Flooring - Classrooms	**20**	**2020**	85	85		**85**	**VCT**
Castle Hills ES - Flooring - Corridors	**20**	**2002**	-5	0		**-3**	**VCT**
Castle Hills ES - Flooring - Library	**15**	**2020**	80	80		**80**	**Carpet / VCT**
Castle Hills ES - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
Castle Hills ES - Flooring - Offices	**20**	**2020**	85	85		**85**	**VCT**
Castle Hills ES - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Castle Hills ES - Flooring - Kitchen	**50**	**2002**	58	40		**49**	**Terrazzo**
Castle Hills ES - Flooring - Gym	**20**	**2002**	-5	0		**-3**	**VCT**
Castle Hills ES - Plastic Laminate	**40**	**2002**	48	48		**48**	
Castle Hills ES - Doors	**20**	**2002**	-5	0		**-3**	
Castle Hills ES - Door Hardware	**20**	**2002**	-5	0		**-3**	
Castle Hills ES - Casework (Built-Ins)	**20**	**2002**	-5	0		**-3**	
Castle Hills ES - Restrooms - Faculty	**20**	**2002**	-5	0		**-3**	**Original-ceramic tile, no partitions, cmu drywall**
Castle Hills ES - Restrooms - Student	**20**	**2002**	-5	0		**-3**	**Ceramic tile / plastic partitions**
Castle Hills ES - Marquee	**15**	**2016**	53	53		**53**	**Replaced 2016 LED; digital; Summer 2023 new equipment**
Castle Hills ES - Paving - Parking Lots	**50**	**2002**	58	30		**44**	**Movement from Poor Soil**
Castle Hills ES - Paving - Sidewalks	**40**	**2002**	48	30		**39**	**Movement from Poor Soil**
Castle Hills ES - Exterior Lighting	**20**	**2002**	-5	0		**-3**	**Polelight & Wall packs LED Bulbs 2019**
Castle Hills ES - Paint - Commons	**15**	**2010**	13	13		**13**	
Castle Hills ES - Paint - Cafeteria	**15**	**2013**	33	33		**33**	**Kitchen painted in 2017**
Castle Hills ES - Paint - Library	**15**	**2013**	33	33		**33**	
Castle Hills ES - Paint - Gyms	**20**	**2013**	50	50		**50**	**Lower walls last painted 2012**
Castle Hills ES - Paint - Exterior	**20**	**2002**	-5	0		**-3**	**Original**
Castle Hills ES - Paint - Hallways	**20**	**2002**	-5	0		**-3**	**P-Lam; Some Drywall; Some Tack Surface; upper to be scheduled**
Non District Covered Castle Hills ES - Track, Teacher Shelter & Basketball Court		**2020**					**Maintained by Castle Hills Foundation and HOA**

Central ES & Special Education Center

Year Built / Age 1957 / 66

Campus Square Footage 152,952

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1957**	**-32**				
Central ES & SPEC - Foundation	**50**	**1957**	-32	40		**4**	**Slab-On-Grade, Original section only**
SPEC - HVAC - Original	**20**	**2020**	85	85		**85**	**MIX - AAON**
SPEC - HVAC - 1978 Addition	**20**	**2020**	85	85		**85**	**Gym; AAON**
SPEC - HVAC - 1993 Addition	**20**	**2020**	85	85		**85**	**AAON**
Central ES - HVAC - 2000 Addition	**20**	**2019**	80	80		**80**	**600 Hallway**
Central ES - HVAC - 2004 Addition	**20**	**2004**	5	5	-35%	**3**	
Central ES & SPEC - HVAC - Controls	**20**	**2021**	90	90		**90**	**Controls = Reliable (Original and Additions)**
SPEC - Ceiling and Lights - Original	**20**	**2020**	85	85		**85**	**MIX - LED**
SPEC - Ceiling and Lights - 1978	**20**	**2020**	85	85		**85**	**LED**
SPEC - Ceiling and Lights - 1993	**20**	**2020**	85	85		**85**	**Small gym, - LED**
Central ES - Ceiling and Lights - 2000	**20**	**2020**	85	85		**85**	**600 Hallway, - LED**
Central ES - Ceiling and Lights - 2004	**20**	**2004**	5	5		**5**	**T-8**
SPEC - Roof - Flat - Original	**20**	**2002**	-5	0	-5%	**-3**	**Partially replaced 2019; mod bit**
SPEC - Roof - Metal - 1978 Addition	**30**	**2019**	87	87		**87**	
Central ES - Roof- Flat - 2000 Addition	**20**	**2019**	80	80	-5%	**76**	**2 ply mod bit**
Central ES - Roof - Shingles - 2004 Addition	**20**	**2004**	5	5	-5%	**5**	**Shingle, flat**
Central ES - Electrical Switchgear - Original	**30**	**2004**	37	5	-11%	**19**	**Updated 2004**
SPEC - Electrical Switchgear - 1988	**30**	**2019**	87	87		**87**	**SQ D**
Central ES & SPEC - Fire Safety - Fire Alarm	**20**	**2004**	5	5	1%	**5**	**Edwards EST 2 - Limited Parts**
Central ES & SPEC - Fire Safety - ERRS	**-**					**-**	
Central ES & SPEC - Fire Safety - Sprinkler System	**50**	**2004**	62	62	-26%	**46**	
SPEC - Food Service Boilers	**20**	**2016**	65	65		**65**	
Central ES - Food Service Boilers	**20**	**2003**	0	5		**3**	
SPEC - Food Service Freezers - Original	**20**	**2004**	5	5		**5**	
Central ES - Food Service Freezers - 2004 Addition	**20**	**2004**	5	5		**5**	
Central ES & SPEC - Generator	**40**	**2019**	90	90		**90**	**Cummins - Diesel; 175KW; needs enclosure**
Central ES & SPEC- Shade Structure - Main	**-**					**-**	
Central ES & SPEC - Playground - Main	**20**	**2003**	0	5		**3**	**Heavy community use; color fading on equipment; good condition**
Central ES & SPEC - Shade Structure - Pre-K	**-**					**-**	
Central ES & SPEC - Playground - Pre-K	**20**	**2004**	5	5		**5**	**Heavy community use; color fading on equipment; fair condition**
Central ES - Perf Arts - Curtains	**20**	**2004**	5	5		**5**	
Central ES - Perf Arts - Stage Lghtng/panel	**25**	**2004**	24	24		**24**	
SPEC - Flooring - Classrooms - Original	**20**	**2019**	80	80		**80**	**VCT**
Central ES - Flooring - Classrooms - 2004 Addition	**20**	**2019**	80	80		**80**	**VCT**
SPEC - Flooring - Corridors - Original	**20**	**2004**	5	5		**5**	**VCT**
Central ES - Flooring - Corridors - 2004 Addition	**20**	**2004**	5	5		**5**	**VCT**
Central ES - Flooring - Library - 2004 Addition	**15**	**2020**	80	80		**80**	**Carpet Sq**
SPEC - Flooring - Offices - Original	**15**	**2020**	80	80		**80**	**Carpet Sq**
Central ES - Flooring - Offices - 2004 Addition	**15**	**2020**	80	80		**80**	**Carpet Sq**
SPEC - Flooring - Cafeteria - Original	**20**	**2004**	5	5		**5**	**VCT**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
Central ES - Flooring - Cafeteria - 2004 Addition	20	2004	5	5		5	VCT
SPEC - Flooring - Kitchen - Original	50	2004	62	62		62	Terrazzo
Central ES - Flooring - Kitchen - 2004 Addition	50	2004	62	62		62	Terrazzo
SPEC - Flooring - Gym - Original	20	2004	5	5		5	VCT
Central ES - Flooring - Gym - 1978 Addition	20	2004	5	5		5	VCT
Central ES & SPEC - Plastic Laminate	40	2004	53	53		53	
Central ES & SPEC - Doors	20	2004	5	5		5	
Central ES & SPEC - Door Hardware	20	2004	5	5		5	
Central ES & SPEC - Casework (Built-Ins)	20	2004	5	5		5	
SPEC - Restrooms - Faculty - Original	20	2004	5	5		5	Ceramic
SPEC - Restrooms - Student - Original	20	2004	5	5		5	Ceramic
Central ES - Restrooms - 2000 Addition	20	2020	85	85		85	
Central ES - Restrooms - 2004 Addition	20	2004	5	5		5	
Central ES - Marquee	30	2004	37	37		37	lit
Central ES & SPEC - Paving - Parking Lots	50	2004	62	62		62	
Central ES & SPEC- Paving - Sidewalks	40	2004	53	50		51	
Central ES & SPEC - Exterior Lighting	20	2004	5	5		5	Metal Halide
SPEC - Paint - Commons	15	2020	80	80		80	
Central ES - Paint - Commons	15	2004	-27	0		-13	2018 Office areas painted
SPEC - Paint - Cafeteria	15	2020	80	80		80	
Central ES - Paint - Cafeteria	15	2021	87	87		87	
Central ES - Paint - Library	15	2004	-27	0		-13	2020 touch ups
SPEC - Paint - Gyms	20	2004	5	5		5	
Central ES - Paint - Gyms	20	2004	5	5		5	Lower walls painted 2019
Central ES & SPEC - Paint - Exterior	20	2004	5	5		5	
SPEC - Paint - Hallways	20	2004	5	5		5	
Central ES - Paint - Hallways	20	2004	5	5		5	2020 maintained

Coyote Ridge ES

Year Built / Age 2005 / 18

Campus Square Footage 99,939

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2005**	**64**				
Coyote Ridge ES - HVAC	**20**	**2005**	10	10	-15%	**8**	**Chiller;**
Coyote Ridge ES - HVAC - Controls	**20**	**2018**	75	75		**75**	**2008 Bond - Enviromatic**
Coyote Ridge ES - Ceiling and Lights	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Roof - Flat	**20**	**2005**	10	10	17%	**12**	**over Kitchen**
Coyote Ridge ES - Roof - Shingled	**20**	**2020**	85	85	17%	**99**	**2018 Storm Damage Insurance Replacement**
Coyote Ridge ES - Electrical Switchgear	**30**	**2005**	40	40	10%	**44**	
Coyote Ridge ES - Elevator	**25**	**2005**	28	28	12%	**31**	**Schindler**
Coyote Ridge ES - Fire Safety - Fire Alarm	**20**	**2005**	10	10	11%	**11**	**Edwards EST 2 - Limited Parts**
Coyote Ridge ES - Fire Safety - ERRS	-					-	
Coyote Ridge ES - Fire Safety - Sprinkler System	**50**	**2005**	64	64	-25%	**48**	
Coyote Ridge ES - Food Service Boilers	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Food Service Freezers	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Generator	**40**	**2005**	55	55		**55**	**Generac - Diesel; 80KW**
Coyote Ridge ES - Shade Structure - Main	-					-	
Coyote Ridge ES - Playground - Main	**20**	**2005**	10	10		**10**	**Game Time; Faded paint; some minor rubber coating cracking; no shade**
Coyote Ridge ES - Shade Structure - Pre-K	-					-	
Coyote Ridge ES - Playground - Pre-K	**20**	**2015**	60	60		**60**	**Good shape**
Coyote Ridge ES - Perf Arts - Curtains	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Perf Arts - Stage Lighting/panel	**25**	**2005**	28	28		**28**	**Terrazzo stairs**
Coyote Ridge ES - Café/Gym - Partition Wall	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Flooring - Classrooms-VCT	**20**	**2022**	95	95		**95**	**Previously carpet**
Coyote Ridge ES - Flooring - Classrooms - VCT	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Flooring - Corridors	**20**	**2005**	10	10		**10**	**VCT / stairs are Terrazzo**
Coyote Ridge ES - Flooring - Library	**20**	**2022**	95	95		**95**	**Carpet / LVT**
Coyote Ridge ES - Flooring - Offices	**15**	**2022**	93	93		**93**	**Carpet**
Coyote Ridge ES - Flooring - Cafeteria	**20**	**2005**	10	10		**10**	**VCT**
Coyote Ridge ES - Flooring - Kitchen	**50**	**2005**	64	25		**45**	**Terrazzo - visible cracks**
Coyote Ridge ES - Flooring - Gym	**20**	**2005**	10	10		**10**	**VCT - loose tiles**
Coyote Ridge ES - Plastic Laminate	**40**	**2005**	55	55		**55**	
Coyote Ridge ES - Doors	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Door Hardware	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Casework (Built-Ins)	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Restrooms - Faculty	**20**	**2005**	10	10		**10**	**Ceramic tile floor, CT wall to 7', then CMU.**
Coyote Ridge ES - Restrooms - Student	**20**	**2005**	10	10		**10**	**Terrazzo movement-cracks in all restrooms, ceramic, CMU / tile partitions, classrooms: ceramic floor / wall.**
Coyote Ridge ES - Marquee	**30**	**2005**	40	40		**40**	
Coyote Ridge ES - Paving - Parking Lots	**50**	**2005**	64	60		**62**	**Concrete**
Coyote Ridge ES - Paving - Sidewalks	**40**	**2005**	55	45		**50**	**some pavers**
Coyote Ridge ES - Exterior Lighting	**20**	**2005**	10	10		**10**	**Parking & Wall Packs LED Bulbs 2021**
Coyote Ridge ES - Paint - Commons	**15**	**2017**	60	60		**60**	
Coyote Ridge ES - Paint - Cafeteria	**15**	**2017**	60	60		**60**	
Coyote Ridge ES - Paint - Library	**15**	**2013**	33	33		**33**	
Coyote Ridge ES - Paint - Gyms	**20**	**2017**	70	70		**70**	**Maintaining lower walls**
Coyote Ridge ES - Paint - Exterior	**20**	**2005**	10	10		**10**	
Coyote Ridge ES - Paint - Hallways	**20**	**2017**	70	70		**70**	**P-Lam, drywall, tackboard**

Creekside ES

Year Built / Age 1989 / 34

Campus Square Footage 60,168

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1989**	**32**				
Creekside ES - HVAC - Original	**20**	**1989**	-70	0	0%	**-35**	**CHILLER; needs work;**
Creekside ES - HVAC	**20**	**2019**	80	80	8%	**86**	**CHILLER; 1 new**
Creekside ES - HVAC Controls	**20**	**2019**	80	80		**80**	**Reliable**
Creekside ES - Ceiling and Lights	**20**	**2019**	80	80		**80**	**LED**
Creekside ES - Roof - Shingled	**20**	**2007**	20	20	5%	**21**	
Creekside ES - Electrical Switchgear	**40**	**1989**		35	9%	**38**	**Engineer reviewed system and extended life**
Creekside ES - Fire Safety - Fire Alarm	**20**	**2019**	80	80	-50%	**40**	**EST 3 w/Voice Evac.**
Creekside ES - Fire Safety - ERRS	**-**					**-**	
Creekside ES - Fire Safety - Sprinkler System	**50**	**1989**	32	32	16%	**37**	
Creekside ES - Food Service Boilers	**20**	**2019**	80	80		**80**	
Creekside ES - Food Service Freezers	**20**	**2010**	35	35		**35**	
Creekside ES - Generator	**40**	**2018**	88	88		**88**	**Cummins- Diesel; 60KW**
Creekside ES - Shade Structure - Main	**20**	**2017**	70	70		**70**	**2 bench shade structures; 2017 shade structure over 5-12 play; good shape**
Creekside ES - Playground - Main	**20**	**2005**	10	10		**10**	**Game Time; Very faded: added curbing to help with drainage**
Creekside ES - Shade Structure - Pre-K	**-**					**-**	
Creekside ES - Playground - Pre-K	**-**					**-**	**Not standard equipment (minimal equip. on Pre-K)**
Creekside ES - Perf Arts - Curtains	**20**	**2019**	80	80		**80**	
Creekside ES - Perf Arts - Stage Lighting/panel	**25**	**2019**	84	84		**84**	**LED**
Creekside ES - Flooring - Classrooms - Carpet	**15**	**2019**	73	73		**73**	
Creekside ES - Flooring - Classrooms - VCT	**20**	**2019**	80	80		**80**	
Creekside ES - Flooring - Corridors	**20**	**2019**	80	80		**80**	**VCT**
Creekside ES - Flooring - Library	**15**	**2019**	73	73		**73**	**Carpet**
Creekside ES - Flooring - Offices	**15**	**2019**	73	73		**73**	**Carpet**
Creekside ES - Flooring - Cafeteria	**20**	**2019**	80	80		**80**	**VCT**
Creekside ES - Flooring - Kitchen	**50**	**1989**	32	32		**32**	**Terrazzo**
Creekside ES - Flooring - Gym	**20**	**2019**	80	80		**80**	**LVT**
Creekside ES - Plastic Laminate	**40**	**1989**	15	25		**20**	
Creekside ES - Doors	**45**	**1989**	24	24		**24**	**Original but in good shape**
Creekside ES - Door Hardware	**20**	**2019**	80	80		**80**	**Medeco**
Creekside ES - Casework (Built-Ins)	**20**	**2019**	80	80		**80**	**Laminant**
Creekside ES - Restrooms - Faculty	**20**	**2019**	80	80		**80**	**Plastic partitions**
Creekside ES - Restrooms - Student	**20**	**2019**	80	80		**80**	**Plastic partitions**
Creekside ES - Marquee	**30**	**2022**	97	97		**97**	
Creekside ES - Paving - Parking Lots	**50**	**1989**	32	32		**32**	**Concrete**
Creekside ES - Paving - Asphalt Parking Lots	**20**	**1989**	-70	0		**-35**	**Back Drive is asphalt**
Creekside ES - Paving - Sidewalks	**40**	**1989**	15	25		**20**	
Creekside ES - Exterior Lighting	**20**	**2019**	80	80		**80**	**LED**
Creekside ES - Paint - Commons	**15**	**2019**	73	73		**73**	
Creekside ES - Paint - Cafeteria	**15**	**2019**	73	73		**73**	**Kitchen 2023**
Creekside ES - Paint - Library	**15**	**2019**	73	73		**73**	
Creekside ES - Paint - Gyms	**20**	**2019**	80	80		**80**	
Creekside ES - Paint - Exterior	**20**	**2007**	20	20		**20**	
Creekside ES - Paint - Hallways	**20**	**2019**	80	80		**80**	

Degan ES

Year Built / Age 1973 / 50

Campus Square Footage 75,764

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1973**	**0**				
Degan ES - Foundation	**50**	**1973**	0	40		**20**	**Slab-On-Grade**
Degan ES - HVAC - Original	**20**	**2020**	85	85	2%	**87**	**RTU; AAON**
Degan ES - HVAC - 1987 Addition	**20**	**2012**	45	45	2%	**46**	
Degan ES - HVAC - 2001 Addition	**20**	**2001**	-10	0	2%	**-5**	
Degan ES - HVAC - Controls	**20**	**2020**	85	85		**85**	**Controls =Alerton**
Degan ES - Ceiling and Lights - Original	**20**	**2020**	85	85		**85**	**LED**
Degan ES - Ceiling and Lights - 1987	**20**	**2012**	45	45		**45**	**Lights & Ceiling tiles replaced, not the grid**
Degan ES - Ceiling and Lights - 2001	**20**	**2001**	-10	5		**-3**	
Degan ES - Roof - Flat - Original	**20**	**2014**	55	55	-34%	**36**	
Degan ES - Roof - Flat - 1987 Addition	**20**	**2012**	45	45	-34%	**30**	
Degan ES - Roof - Flat - 2001 Addition	**20**	**2001**	-10	5	-34%	**-3**	
Degan ES - Electrical Switchgear	**30**	**2020**	90	90	6%	**95**	**SQ D**
Degan ES - Fire Safety - Fire Alarm	**20**	**2020**	85	85		**85**	**EST 3**
Degan ES - Fire Safety - ERRS	**-**					**-**	
Degan ES - Fire Safety - Sprinkler System - Original	**50**	**2020**	94	94		**94**	
Degan ES - Fire Safety - Sprinkler System - 1987	**50**	**2020**	94	94		**94**	
Degan ES - Fire Safety - Sprinkler System - 2001	**50**	**2001**	56	56	18%	**66**	
Degan ES - Food Service Boilers	**20**	**2020**	85	85		**85**	
Degan ES - Food Service Freezers	**20**	**2020**	85	85		**85**	
Degan ES - Generator	**40**	**2020**	93	93		**93**	**MTU - Diesel; 60KW**
Degan ES - Shade Structure - Main	**-**					**-**	
Degan ES - Playground - Main	**20**	**2005**	10	10		**10**	**Game Time; High traffic; Drainage issues partially resolved still holds water; a lot of vandalism**
Degan ES - Shade Structrue - Pre-K	**-**					**-**	
Degan ES - Playground - Pre-K	**20**	**2015**	60	60		**60**	**Game Time; Looks good**
Degan ES - Perf Arts - Curtains	**20**	**2020**	85	85		**85**	
Degan ES - Perf Arts - Stage Lghtng/panel	**25**	**2020**	88	88		**88**	**LED**
Degan ES - Flooring - Classrooms -Original	**20**	**2020**	85	85		**85**	**VCT**
Degan ES - Flooring - Classrooms - 1987 Add	**20**	**2004**	5	5		**5**	**VCT; Corridor replaced 2020**
Degan ES - Flooring - Classrooms - 2001 Add	**20**	**2004**	5	5		**5**	**VCT**
Degan ES - Flooring - Corridors	**20**	**2020**	85	85		**85**	**VCT; all but 2001 complete 2020**
Degan ES - Flooring - Library	**15**	**2020**	80	80		**80**	**Carpet/VCT**
Degan ES - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
Degan ES - Flooring - Cafeteria	**20**	**2020**	85	85		**85**	**VCT**
Degan ES - Flooring - Kitchen	**50**	**1973**	0	5		**3**	**Terrazzo**
Degan ES - Flooring - Gym	**20**	**2020**	85	85		**85**	**LVT**
Degan ES - Plastic Laminate	**40**	**2001**	45	45		**45**	
Degan ES - Doors	**20**	**2020**	85	85		**85**	**Original areas completed; Interior replaced**
Degan ES - Door Hardware	**20**	**2020**	85	85		**85**	**Medeco**
Degan ES - Casework (Built-Ins)	**20**	**2020**	85	85		**85**	**Original and 1987 areas completed; Laminant**
Degan ES - Restrooms - Faculty	**20**	**2020**	85	85		**85**	**ceramic tile walls and floors**
Degan ES - Restrooms - Student	**20**	**2020**	85	85		**85**	**Ceramic floor and walls, laminate partitions**
Degan ES - Restrooms - 1987 Addition	**20**	**2008**	25	25		**25**	**New tile floor 2020**
Degan ES - Restrooms - 2001 Addition	**20**	**2001**	-10	5		**-3**	
Degan ES - Marquee	**30**	**2004**	37	37		**37**	
Degan ES - Paving - Parking Lots	**50**	**1973**	0	5		**3**	
Degan ES - Paving - Asphalt Parking Lots	**20**	**2005**	10	5		**8**	
Degan ES - Paving - Sidewalks	**40**	**1973**	-25	0		**-13**	**Some movement; Repairing as needed**
Degan ES - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
Degan ES - Paint - Commons	**15**	**2020**	80	80		**80**	**P-Lam, drywall**
Degan ES - Paint - Cafeteria	**15**	**2020**	80	80		**80**	
Degan ES - Paint - Library	**15**	**2020**	80	80		**80**	
Degan ES - Paint - Gyms	**20**	**2020**	85	85		**85**	**P-Lam, drywall;**
Degan ES - Paint - Exterior	**20**	**2020**	85	85		**85**	
Degan ES - Paint - Hallways	**20**	**2020**	85	85		**85**	**P-Lam, drywall, some tac.;**

Donald ES STEM Academy

Year Built / Age 1989 / 34

Campus Square Footage 80,465

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1989**	**32**				
Donald ES - HVAC - Original	**20**	**2007**	20	20	-1%	**20**	**RTU**
Donald ES - HVAC - 2001 Addition	**20**	**2001**	-10	5	-1%	**-3**	**RTU**
Donald ES - HVAC - Controls	**20**	**2007**	20	20		**20**	**Controls = Alerton**
Donald ES - Ceiling and Lights - Original	**20**	**2007**	20	20		**20**	**T5**
Donald ES - Ceiling and Lights - 2001 Addition	**20**	**2001**	-10	5		**-3**	**T8**
Donald ES - Roof - Flat - Orginal	**20**	**2016**	65	65	12%	**73**	
Donald ES - Roof - Flat - 2001	**20**	**2001**	-10	5	12%	**-3**	
Donald ES - Roof - Shingled	**20**	**2016**	65	65	12%	**73**	
Donald ES - Electrical Switchgear	**30**	**1989**	-13	5	-10%	**-5**	**Siemens**
Donald ES - Fire Safety - Fire Alarm	**20**	**2001**	-10	5	13%	**-2**	**Edwards EST 2 - Limited Parts**
Donald ES - Fire Safety - ERRS	**-**					**-**	
Donald ES - Fire Safety - Sprinkler System	**50**	**1989**	32	35	-50%	**17**	
Donald ES - Fire Safety - 2001 Sprinkler System	**50**	**2001**	56	60	-50%	**29**	
Donald ES - Food Service Boilers	**20**	**2016**	65	65		**65**	
Donald ES - Food Service Freezers	**20**	**2007**	20	20		**20**	
Donald ES - Generator	**-**					**-**	
Donald ES - Shade Structure - Main	**20**	**2008**	25	25		**25**	**Cantelever shade on OLA added 2019**
Donald ES - Playground - Main	**20**	**2012**	45	45		**45**	**Little Tykes - slide on top; good shape**
Donald ES - Shade Structure - Pre-K	**-**					**-**	
Donald ES - Playground - Pre-K	**20**	**2012**	45	45		**45**	
Donald ES - Perf Arts - Curtains	**20**	**2018**	75	75		**75**	
Donald ES - Perf Arts - Stage Lghtng/panel	**25**	**2019**	84	84		**84**	**LED 2021**
Donald ES - Flooring - Classrooms - Carpet	**-**						
Donald ES - Flooring - Classrooms - VCT	**20**	**2017**	70	70		**70**	
Donald ES - Flooring - Corridors	**20**	**2011**	40	40		**40**	**VCT**
Donald ES - Flooring - Library	**20**	**2017**	70	70		**70**	**VCT/Carpet Tile**
Donald ES - Flooring - Offices	**20**	**2017**	70	70		**70**	**VCT**
Donald ES - Flooring - Cafeteria	**20**	**2017**	70	70		**70**	**VCT**
Donald ES - Flooring - Kitchen	**50**	**1989**	32	32		**32**	**Terrazzo**
Donald ES - Flooring - Gym	**20**	**2017**	70	70		**70**	**LVT**
Donald ES - Plastic Laminate	**40**	**2001**	45	45		**45**	
Donald ES - Doors	**40**	**1989**	15	10		**13**	
Donald ES - Door Hardware	**20**	**2020**	85	85		**85**	
Donald ES - Casework (Built-Ins)	**20**	**1989**	-70	0		**-35**	
Donald ES - Restrooms - Faculty	**20**	**2018**	75	75		**75**	
Donald ES - Restrooms - Student	**20**	**2018**	75	75		**75**	
Donald ES - Restrooms - 2001 Addition	**20**	**2018**	75	75		**75**	
Donald ES - Marquee	**30**	**2018**	83	83		**83**	**New face (STEM) - not lit; repairs 2023**
Donald ES - Paving - Parking Lots	**50**	**1989**	32	32		**32**	**Concrete**
Donald ES - Paving - Sidewalks	**40**	**1989**	15	15		**15**	**Heaving in multiple areas; some repairs made in 2021**
Donald ES - Exterior Lighting	**20**	**2018**	75	75		**75**	**In house LED 2018 (bulbs only)**
Donald ES - Paint - Commons	**15**	**2018**	67	67		**67**	**Stem Update 2018; Admin areas painted 2019**
Donald ES - Paint - Cafeteria	**15**	**2018**	67	67		**67**	**Stem Update 2018**
Donald ES - Paint - Library	**15**	**2018**	67	67		**67**	**Stem Update 2018**
Donald ES - Paint - Gyms	**20**	**2018**	75	75		**75**	**Stem Update 2018**
Donald ES - Paint - Exterior	**20**	**2016**	65	65		**65**	
Donald ES - Paint - Hallways	**20**	**2018**	75	75		**75**	**Stem Update 2018**

Ethridge ES

Year Built / Age 1990 / 33

Campus Square Footage 63,863

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1990**	**34**				
Ethridge ES - HVAC	**20**	**2008**	25	25	-5%	**24**	**RTU;**
Ethridge ES - HVAC - Controls	**20**	**2008**	25	25		**25**	**Controls = Alerton**
Ethridge ES - Ceiling and Lights	**20**	**2008**	25	25		**25**	
Ethridge ES - Roof - Flat	**20**	**2019**	80	80		**80**	
Ethridge ES - Roof - Shingled	**20**	**2008**	25	25	-3%	**24**	
Ethridge ES - Electrical Switchgear	**30**	**1990**	-10	5	-18%	**-3**	
Ethridge ES - Fire Safety - Fire Alarm	**20**	**2002**	-5	5	-4%	**0**	**Edwards EST 2 - Limited Parts**
Ethridge ES - Fire Safety - ERRS	**-**					**-**	
Ethridge ES - Fire Safety - Sprinkler System	**50**	**2008**	70	70	-14%	**60**	
Ethridge ES - Food Service Boilers	**20**	**2020**	85	85		**85**	
Ethridge ES - Food Service Freezers	**20**	**2008**	25	25		**25**	
Ethridge ES - Generator	**-**					**-**	
Ethridge ES - Shade Structure - Main	**20**	**2023**	100	100		**100**	
Playground - MainEthridge ES - Main	**20**	**2015**	60	60		**60**	**good shape**
Ethridge ES - Shade Structure - Pre-K	**-**					**-**	
Ethridge ES - Playground - Pre-K	**20**	**2015**	60	60		**60**	
Ethridge ES - Perf Arts - Curtains	**20**	**2009**	30	30		**30**	
Ethridge ES - Perf Arts - Stage Lghtng/panel	**25**	**2018**	80	80		**80**	
Ethridge ES - Flooring - Classrooms - VCT	**20**	**2017**	70	70		**70**	**VCT**
Ethridge ES - Flooring - Corridors	**20**	**2017**	70	70		**70**	**VCT**
Ethridge ES - Flooring - Library	**20**	**2017**	70	70		**70**	**VCT/Carpet Tile**
Ethridge ES - Flooring - Offices	**15**	**2012**	27	27		**27**	**VCT, lounge: Carpet / VCT**
Ethridge ES - Flooring - Cafeteria	**20**	**2017**	70	70		**70**	**VCT**
Ethridge ES - Flooring - Kitchen	**50**	**1990**	34	34		**34**	**Terrazzo**
Ethridge ES - Flooring - Gym	**20**	**2017**	70	70		**70**	**LVT**
Ethridge ES - Plastic Laminate	**40**	**2008**	63	63		**63**	
Ethridge ES - Doors	**20**	**1990**	-65	0		**-33**	
Ethridge ES - Door Hardware	**20**	**1990**	-65	0		**-33**	**Knobs**
Ethridge ES - Casework (Built-Ins)	**20**	**1990**	-65	0		**-33**	
Ethridge ES - Restrooms - Faculty	**20**	**2018**	75	75		**75**	
Ethridge ES - Restrooms - Student	**20**	**2018**	75	75		**75**	
Ethridge ES - Marquee	**15**	**2012**	27	35		**31**	**2012 - Digital**
Ethridge ES - Paving - Parking Lots	**50**	**1990**	34	34		**34**	**Concrete; 22 new spaces added in front of school 2018**
Ethridge ES - Paving - Sidewalks	**40**	**1990**	18	18		**18**	
Ethridge ES - Exterior Lighting	**20**	**2019**	80	80		**80**	**LED**
Ethridge ES - Paint - Commons	**15**	**2012**	27	27		**27**	**A-wing, 1 wall tackboard, 3 walls drywall**
Ethridge ES - Paint - Cafeteria	**15**	**2012**	27	27		**27**	
Ethridge ES - Paint - Library	**15**	**2015**	47	47		**47**	
Ethridge ES - Paint - Gyms	**20**	**2012**	45	45		**45**	
Ethridge ES - Paint - Exterior	**20**	**2012**	45	45		**45**	**2018 Exterior Doors, rails and posts**
Ethridge ES - Paint - Hallways	**20**	**2013**	50	50		**50**	**2013-Installed tackboards, P-Lam original / paint**

Flower Mound ES

Year Built / Age 1985 / 38

Campus Square Footage 79,485

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1985**	**24**				
Flower Mound ES - Foundation	**50**	**1985**	24	24		**24**	**Slab-On-Grade, Repairs in 2016**
Flower Mound ES - HVAC - Original	**20**	**2005**	10	10	-2%	**10**	**RTU / HW; change to RTU**
Flower Mound ES - HVAC - 2001 Addition	**20**	**2001**	-10	5	-2%	**-3**	**RTU / HW; change to RTU**
Flower Mound ES - HVAC - Controls	**20**	**2005**	10	10		**10**	**Controls = Alerton**
Flower Mound ES - Ceiling and Lights - Original	**20**	**2005**	10	10		**10**	**T-8**
Flower Mound ES - Ceiling and Lights - 2001 Addition	**20**	**2001**	-10	5		**-3**	**T-5**
Flower Mound ES - Roof - Original	**20**	**2007**	20	20	-18%	**16**	
Flower Mound ES - Roof - 2001 Addition	**20**	**2001**	-10	5	-18%	**-3**	
Flower Mound ES - Electrical Switchgear	**30**	**2007**	47	47	-5%	**44**	**Eaton/Cutler Hammer**
Flower Mound ES - Lift in building	**25**	**2005**	28	28		**28**	**Nat'l Wheel-O-Vator - Lift at stage Needs Ramp**
Flower Mound ES - Fire Safety - Fire Alarm	**20**	**2005**	10	10	-2%	**10**	**Edwards EST 2**
Flower Mound ES - Fire Safety - ERRS	**-**					**-**	
Flower Mound ES - Fire Safety - Sprinkler System	**50**	**2005**	64	64	-7%	**59**	
Flower Mound ES - Food Service Boilers	**20**	**2020**	85	85		**85**	**Both Tankless 2020**
Flower Mound ES - Food Service Freezers	**20**	**2005**	10	10		**10**	
Flower Mound ES - Generator	**-**					**-**	
Flower Mound ES - Shade Structure - Main	**20**	**2013**	50	50		**50**	
Flower Mound ES - Playground - Main	**20**	**2012**	45	45		**45**	**2021 sidewalks installed to help drainage; has an additional section; installed 5 new steps & 4 new platforms**
Flower Mound ES - Shade Structure - Pre-K	**-**					**-**	
Flower Mound ES - Playground - Pre-K	**20**	**2012**	45	45		**45**	**Campus has 2 additional playgrounds installed by school. Fair shape**
Flower Mound ES - Perf Arts - Curtains	**20**	**2004**	5	5		**5**	
Flower Mound ES - Perf Arts - Stage Lghtng/panel	**25**	**2005**	28	28		**28**	**Track Lighting**
Flower Mound ES - Flooring - Classrooms - VCT	**20**	**2017**	70	75		**73**	**Kinder Hall & Rms 108-110 replaced 2020**
Flower Mound ES - Flooring - Classrooms - VCT - 2001 Addition	**20**	**2015**	60	60		**60**	
Flower Mound ES - Flooring - Corridors	**20**	**2017**	70	70		**70**	**VCT**
Flower Mound ES - Flooring - Library	**15**	**2017**	60	60		**60**	**Carpet Tile**
Flower Mound ES - Flooring - Offices	**15**	**2017**	60	60		**60**	**Carpet Tile**
Flower Mound ES - Flooring - Cafeteria	**20**	**2017**	70	70		**70**	**VCT; Carpet on stage replaced 2021**
Flower Mound ES - Flooring - Kitchen	**50**	**1985**	24	24		**24**	**Terrazzo**
Flower Mound ES - Flooring - Gym	**20**	**2017**	70	70		**70**	**LVT**
Flower Mound ES - Plastic Laminate	**40**	**2017**	85	85		**85**	
Flower Mound ES - Doors	**20**	**1985**	-90	0		**-45**	
Flower Mound ES - Door Hardware	**20**	**2001**	-10	5		**-3**	
Flower Mound ES - Casework (Built-Ins)	**20**	**1985**	-90	0		**-45**	**Light Tan Wood Grain Tops**
Flower Mound ES - Restrooms - Faculty	**20**	**2018**	75	75		**75**	
Flower Mound ES - Restrooms - Student	**20**	**2012**	45	45		**45**	**10x10 ceramic floors / walls, plastic partitions.**
Flower Mound ES - Restrooms - 2001 Addition	**20**	**2018**	75	75		**75**	
Flower Mound ES - Marquee	**30**	**1994**	3	50		**27**	**Refurbished 2021; LED lit**
Flower Mound ES - Paving - Parking Lots	**50**	**1985**	24	24		**24**	
Flower Mound ES - Paving - Sidewalks	**40**	**1985**	5	5		**5**	**Some movement**
Flower Mound ES - Exterior Lighting	**30**	**2019**	87	87		**87**	**LED**
Flower Mound ES - Paint - Commons	**15**	**2018**	67	67		**67**	**PLAM; Admin. Areas painted 2019**
Flower Mound ES - Paint - Cafeteria	**15**	**2009**	7	7		**7**	**Ceramic tile, CMU; Kitchen 2023**
Flower Mound ES - Paint - Library	**15**	**2009**	7	7		**7**	
Flower Mound ES - Paint - Gyms	**20**	**2012**	45	45		**45**	**CMU**
Flower Mound ES - Paint - Exterior	**20**	**2007**	20	20		**20**	**Front Entry painted 2019**
Flower Mound ES - Paint - Hallways	**20**	**2018**	75	75		**75**	

Forest Vista ES

Year Built / Age 1997 / 26

Campus Square Footage 85,610

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1997**	**48**				
Forest Vista ES - HVAC - Original	**20**	**2021**	90	90	18%	**100**	**RTU**
Forest Vista ES - HVAC - 2001 Addition	**20**	**2021**	90	90	18%	**100**	**RTU**
Forest Vista ES - HVAC - Controls	**20**	**2021**	90	90		**90**	**Reliable controls**
Forest Vista ES - Ceiling and Lights - Original	**20**	**2021**	90	90		**90**	**LED**
Forest Vista ES - Ceiling and Lights - 2001 Addition	**20**	**2021**	90	90		**90**	**LED**
Forest Vista ES - Roof - Flat - Original	**20**	**2021**	90	90	20%	**100**	
Forest Vista ES - Roof - Flat - 2001 Addition	**20**	**2021**	90	90	20%	**100**	
Forest Vista ES - Electrical Switchgear	**30**	**1997**	13	13	9%	**14**	**Cutler Hammer**
Forest Vista ES - Fire Safety - Fire Alarm	**20**	**2021**	90	90	16%	**90**	**New Panel / Original Devices; Edwards EST 3**
Forest Vista ES - Fire Safety - ERRS	**-**					**-**	
Forest Vista ES - Fire Safety - Sprinkler System	**50**	**1997**	48	55	13%	**58**	**Sprinkler heads replaced 2020**
Forest Vista ES - Fire Safety -Emergency Radio	**-**					**-**	**Tracking Purposes only - Test Pass - not needed**
Forest Vista ES - Food Service Boilers	**20**	**2021**	90	90		**90**	**Tankless**
Forest Vista ES - Food Service Freezers	**20**	**2021**	90	90		**90**	
Forest Vista ES - Generator	**40**	**2020**	93	93		**93**	**Generac - Diesel; 40KW**
Forest Vista ES - Shade Structure -Main	**20**	**2008**	25	25		**25**	**Small Shade Structure - too small to cover**
Forest Vista ES - Playground -Main	**20**	**2019**	80	80		**80**	
Forest Vista ES - Shade Structure - Pre-K	**-**					**-**	**N/A**
Forest Vista ES - Playground - Pre-K	**20**	**2015**	60	65		**63**	**Game Time; New Fence 2017; good shape**
Forest Vista ES - Perf Arts - Curtains	**20**	**2021**	90	90		**90**	
Forest Vista ES - Perf Arts - Stage Lghtng/panel	**25**	**2021**	92	92		**92**	
Forest Vista ES - Flooring - Classrooms - Org	**20**	**2021**	90	90		**90**	**VCT**
Forest Vista ES - Flooring - Classrms - 2001 Add	**20**	**2021**	90	90		**90**	**VCT**
Forest Vista ES - Flooring - Corridors	**20**	**2021**	90	90		**90**	
Forest Vista ES - Flooring - Library	**15**	**2021**	87	87		**87**	**Carpet Squares/VCT**
Forest Vista ES - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet**
Forest Vista ES - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Forest Vista ES - Flooring - Kitchen	**50**	**1997**	48	35		**42**	**Terrazzo**
Forest Vista ES - Flooring - Gym	**20**	**2021**	90	90		**90**	
Forest Vista ES - Plastic Laminate	**40**	**1997**	35	30		**33**	
Forest Vista ES - Doors	**20**	**2021**	90	90		**90**	
Forest Vista ES - Door Hardware	**20**	**2021**	90	90		**90**	
Forest Vista ES - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	**Green**
Forest Vista ES - Restrooms - Faculty	**20**	**2021**	90	90		**90**	**Ceramic Tile**
Forest Vista ES - Restrooms - Student	**20**	**2021**	90	90		**90**	**Ceramic Tile, P-Lam partitions**
Forest Vista ES - Restrooms - 2001 Addition	**20**	**2021**	90	90		**90**	
Forest Vista ES - Marquee	**30**	**1997**	13	13		**13**	**LED 2020**
Forest Vista ES - Paving - Parking Lots	**50**	**1997**	48	48		**48**	**Concrete**
Forest Vista ES - Paving - Sidewalks	**40**	**1997**	35	35		**35**	**Concrete**
Forest Vista ES - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
Forest Vista ES - Paint - Commons	**15**	**2021**	87	87		**87**	**P-Lam, some tackboard**
Forest Vista ES - Paint - Cafeteria	**15**	**2021**	87	87		**87**	
Forest Vista ES - Paint - Library	**15**	**2021**	87	87		**87**	
Forest Vista ES - Paint - Gyms	**20**	**2021**	90	90		**90**	
Forest Vista ES - Paint - Exterior	**20**	**2011**	40	40		**40**	
Forest Vista ES - Paint - Hallways	**20**	**2021**	90	90		**90**	

Garden Ridge ES

Year Built / Age 1992 / 31

Campus Square Footage 63,853

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1992**	**38**				
Garden Ridge ES - HVAC	**20**	**2012**	45	45	-2%	**44**	**RTU;**
Garden Ridge ES - HVAC - Controls	**20**	**2012**	45	45		**45**	**Controls = Alerton**
Garden Ridge ES - Ceiling and Lights	**20**	**2012**	45	35		**40**	**T5**
Garden Ridge ES - Roof - Flat	**20**	**2012**	45	45	13%	**51**	
Garden Ridge ES - Roof - Shingled	**20**	**2012**	45	45	13%	**51**	
Garden Ridge ES - Electrical Switchgear	**30**	**1992**	-3	5	0%	**1**	**Switch Gear needs updating; Siemans**
Garden Ridge ES - Fire Safety - Fire Alarm	**20**	**2012**	45	25	-26%	**26**	**Harrington HS3200; unsupported**
Garden Ridge ES - Fire Safety - ERRS	**-**					**-**	
Garden Ridge ES - Fire Safety - Sprinkler System	**50**	**1992**	38	38	3%	**39**	
Garden Ridge ES - Food Service Boilers	**20**	**2012**	45	45		**45**	
Garden Ridge ES - Food Service Freezers	**20**	**2012**	45	45		**45**	
Garden Ridge ES - Generator	**40**	**2012**	73	73		**73**	**Generac - Diesel; 80 KW**
Garden Ridge ES - Shade Structure - Main	**20**	**-**				**-**	**Shade Structure only on secondary**
Garden Ridge ES - Playground - Main	**20**	**2010**	35	35		**35**	**Alot of traffic; 2 panels added 2017**
Garden Ridge ES - Shade Structure - Pre-K	**20**	**2014**	55	55		**55**	
Garden Ridge ES - Playground - Pre-K	**20**	**2018**	75	75		**75**	**good shape**
Garden Ridge ES - Perf Arts - Curtains	**20**	**2019**	80	80		**80**	
Garden Ridge ES - Perf Arts - Stage Lghtng/panel	**25**	**2012**	56	56		**56**	
Garden Ridge ES - Flooring - Classrooms	**20**	**2012**	45	45		**45**	**VCT**
Garden Ridge ES - Flooring - Corridors	**20**	**2012**	45	45		**45**	**VCT with P-Lam**
Garden Ridge ES - Flooring - Library	**20**	**2012**	45	45		**45**	**VCT**
Garden Ridge ES - Flooring - Offices	**20**	**2012**	45	45		**45**	**VCT**
Garden Ridge ES - Flooring - Cafeteria	**20**	**2012**	45	45		**45**	**VCT**
Garden Ridge ES - Flooring - Kitchen	**50**	**1992**	38	30		**34**	**Terrazzo**
Garden Ridge ES - Flooring - Gym	**20**	**2012**	45	40		**43**	**VCT; carpet bench**
Garden Ridge ES - Plastic Laminate	**40**	**2012**	73	73		**73**	
Garden Ridge ES - Doors	**20**	**1992**	-55	0		**-28**	**Light Color**
Garden Ridge ES - Door Hardware	**20**	**2020**	85	85		**85**	
Garden Ridge ES - Casework (Built-Ins)	**20**	**1992**	-55	0		**-28**	
Garden Ridge ES - Restrooms - Faculty	**20**	**2020**	85	85		**85**	
Garden Ridge ES - Restrooms - Student	**20**	**2020**	85	85		**85**	
Garden Ridge ES - Marquee	**30**	**1992**	-3	2		**-1**	**LED**
Garden Ridge ES - Paving - Parking Lots	**50**	**1992**	38	38		**38**	**Concrete**
Garden Ridge ES - Paving - Sidewalks	**40**	**1992**	23	23		**23**	**Concrete**
Garden Ridge ES - Exterior Lighting	**20**	**2018**	75	65		**70**	**LED Lamps only**
Garden Ridge ES - Paint - Commons	**15**	**2012**	27	27		**27**	
Garden Ridge ES - Paint - Cafeteria	**15**	**2012**	27	27		**27**	
Garden Ridge ES - Paint - Library	**15**	**2012**	27	27		**27**	
Garden Ridge ES - Paint - Gyms	**20**	**2012**	45	45		**45**	
Garden Ridge ES - Paint - Exterior	**20**	**2012**	45	45		**45**	
Garden Ridge ES - Paint - Hallways	**20**	**2012**	45	45		**45**	

Hebron Valley ES

Year Built / Age 1989 / 34

Campus Square Footage 79,195

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1989**	**32**				
Hebron Valley ES - HVAC - Original	**20**	**2008**	25	25	-19%	**20**	**RTU;**
Hebron Valley ES - HVAC - 2002 Addition	**20**	**2002**	-5	5	-19%	**0**	
Hebron Valley ES - HVAC - Controls	**20**	**2008**	25	25		**25**	**Controls = Alerton**
Hebron Valley ES - Ceiling and Lights - Original	**20**	**2008**	25	20		**23**	**T5**
Hebron Valley ES - Ceiling and Lights - 2002 Addition	**20**	**2002**	-5	5		**0**	
Hebron Valley ES - Roof - Flat - Original	**20**	**2018**	75	75	11%	**83**	**2008 Bond**
Hebron Valley ES - Roof - Flat - 2002 Addition	**20**	**2002**	-5	5	11%	**0**	
Hebron Valley ES - Roof - Shingled	**20**	**2018**	75	75	11%	**83**	**2008 Bond**
Hebron Valley ES - Electrical Switchgear	**30**	**1989**	-13	5	-19%	**-5**	
Hebron Valley ES - Fire Safety - Fire Alarm	**20**	**2008**	25	20	-5%	**21**	**Edwards Quickstart**
Hebron Valley ES - Fire Safety - ERRS	**-**					**-**	
Hebron Valley ES - Fire Safety - Sprinkler System	**50**	**2008**	70	70	9%	**76**	
Hebron Valley ES - Food Service Boilers	**20**	**2018**	75	75		**75**	
Hebron Valley ES - Food Service Freezers	**20**	**2008**	25	25		**25**	
Hebron Valley ES - Generator	**-**					**-**	
Hebron Valley ES - Shade Structure - Main	**20**	**2019**	80	80		**80**	**Partial shade structure 2019; 2 bench shade covers; campus adding additional shade cover & concrete Summer 2022**
Hebron Valley ES - Playground - Main	**20**	**2016**	65	65		**65**	**Good shape**
Hebron Valley ES - Shade Structure - Pre-K	**-**					**-**	
Hebron Valley ES - Playground - Pre-K	**20**	**2016**	65	65		**65**	**Good Shape**
Hebron Valley ES - Perf Arts - Curtains	**20**	**2018**	75	75		**75**	
Hebron Valley ES - Perf Arts - Stage Lighting/panel	**25**	**2018**	80	80		**80**	**Dimmer cabinet: 2008; stage ramp needed**
Hebron Valley ES - Flooring - Classrooms - VCT	**15**	**2020**	80	80		**80**	**Music room: VCT-2014**
Hebron Valley ES - Flooring - Corridors	**20**	**2020**	85	85		**85**	**VCT**
Hebron Valley ES - Flooring - Library	**15**	**2020**	80	80		**80**	**Half and half Carpet/VCT**
Hebron Valley ES - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet and VCT**
Hebron Valley ES - Flooring - Cafeteria	**20**	**2020**	85	85		**85**	**VCT, no ADA to stage**
Hebron Valley ES - Flooring - Kitchen	**50**	**1989**	32	30		**31**	**Terrazzo**
Hebron Valley ES - Flooring - Gym	**20**	**2020**	85	85		**85**	**VCT**
Hebron Valley ES - Plastic Laminate	**40**	**2002**	48	48		**48**	
Hebron Valley ES - Doors	**20**	**1989**	-70	0		**-35**	**Golden Oak**
Hebron Valley ES - Door Hardware	**20**	**1989**	-70	0		**-35**	**Knobs**
Hebron Valley ES - Casework (Built-Ins)	**20**	**1989**	-70	0		**-35**	
Hebron Valley ES - Restrooms - Faculty	**20**	**2018**	75	75		**75**	
Hebron Valley ES - Restrooms - Student	**20**	**2018**	75	75		**75**	
Hebron Valley ES - Restrooms - 2002 Addition	**20**	**2018**	75	75		**75**	
Hebron Valley ES - Marquee	**15**	**2013**	33	33		**33**	**LED; digital**
Hebron Valley ES - Paving - Parking Lots	**50**	**1989**	32	32		**32**	**Concrete**
Hebron Valley ES - Paving - Sidewalks	**40**	**1989**	15	15		**15**	**Heaving repaired**
Hebron Valley ES - Exterior Lighting	**20**	**2021**	90	90		**90**	**Pole lights LED 2021**
Hebron Valley ES - Paint - Commons	**15**	**2012**	27	27		**27**	**Admin. Areas painted in 2019**
Hebron Valley ES - Paint - Cafeteria	**15**	**2023**	100	100		**100**	
Hebron Valley ES - Paint - Library	**15**	**2012**	27	27		**27**	
Hebron Valley ES - Paint - Gyms	**20**	**2015**	60	60		**60**	
Hebron Valley ES - Paint - Exterior	**20**	**2012**	45	45		**45**	
Hebron Valley ES - Paint - Hallways	**20**	**2012**	45	45		**45**	**P-Lam / Tackboard**

Heritage ES

Year Built / Age 1993 / 30

Campus Square Footage 80,517

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1993**	**40**				
Heritage ES - HVAC - Original	**20**	**2014**	55	55	-13%	**48**	**RTU**
Heritage ES - HVAC - 2007 Addition	**20**	**2007**	20	20	-13%	**17**	
Heritage ES - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Heritage ES - Ceiling and Lights - Original	**20**	**2014**	55	55		**55**	**LED**
Heritage ES - Ceiling and Lights - 2007 Addition	**20**	**2007**	20	15		**18**	**T-5**
Heritage ES - Roof - Flat	**20**	**2021**	90	90	20%	**100**	
Heritage ES - Roof - 2007 Addition	**20**	**2021**	90	90	20%	**100**	
Heritage ES - Roof - Shingled	**20**	**2018**	75	75	20%	**90**	**2017 hail damage insurance replacement**
Heritage ES - Electrical Switchgear	**30**	**1993**	0	5	0%	**3**	**Square D**
Heritage ES - Fire Safety - Fire Alarm	**20**	**2020**	85	85		**85**	**EST 3 Voice Evac**
Heritage ES - Fire Safety - ERRS	**-**					**-**	
Heritage ES - Fire Safety - Sprinkler System	**50**	**1993**	40	40	-30%	**28**	
Heritage ES - Food Service Boilers	**20**	**2013**	50	50		**50**	**Tank - 2013**
Heritage ES - Food Service Freezers	**20**	**2014**	55	55		**55**	
Heritage ES - Generator	**-**					**-**	
Heritage ES - Shade Structure - Main	**20**	**2015**	60	60		**60**	**2 main shade structures and 2 sails**
Heritage ES - Playground - Main	**20**	**2013**	50	50		**50**	**Poor drainage**
Heritage ES - Shade Structure - Pre-K	**-**					**-**	
Heritage ES - Playground - Pre-K	**20**	**2010**	35	35		**35**	**2021 New swing set; pre-k Discovery added 2019**
Heritage ES - Perf Arts - Curtains	**20**	**2009**	30	30		**30**	
Heritage ES - Perf Arts - Stage Lighting/panel	**25**	**2018**	80	80		**80**	**LED**
Heritage ES - Flooring - Clssrm - Original	**20**	**2017**	70	70		**70**	**VCT**
Heritage ES - Flooring - Clssrm -2007 Add	**20**	**2017**	70	70		**70**	**VCT**
Heritage ES - Flooring - Corridors	**20**	**2017**	70	70		**70**	**VCT**
Heritage ES - Flooring - Library	**20**	**2017**	70	70		**70**	**VCT & Carpet Tiles**
Heritage ES - Flooring - Offices	**20**	**2017**	70	70		**70**	**VCT**
Heritage ES - Flooring - Cafeteria	**20**	**2017**	70	70		**70**	**VCT**
Heritage ES - Flooring - Kitchen	**50**	**1993**	40	35		**38**	**Terrazzo-cracked**
Heritage ES - Flooring - Gym	**20**	**2017**	70	70		**70**	**LVT**
Heritage ES - Plastic Laminate	**40**	**1993**	25	20		**23**	**Epoxy paint over**
Heritage ES - Doors	**20**	**1993**	-50	0		**-25**	**Golden Oack**
Heritage ES - Door Hardware	**20**	**1993**	-50	0		**-25**	**Levers**
Heritage ES - Casework (Built-Ins)	**20**	**1993**	-50	0		**-25**	**Original blue**
Heritage ES - Restrooms - Faculty	**20**	**2018**	75	75		**75**	
Heritage ES - Restrooms - Student	**20**	**2018**	75	75		**75**	
Heritage ES - Restrooms - 2007 Addition	**20**	**2007**	20	20		**20**	
Heritage ES - Marquee	**30**	**2012**	63	63		**63**	**T-8**
Heritage ES - Paving - Parking Lots	**50**	**1993**	40	40		**40**	
Heritage ES - Paving - Sidewalks	**40**	**1993**	25	25		**25**	
Heritage ES - Exterior Lighting	**20**	**2014**	55	55		**55**	**All LED**
Heritage ES - Paint - Commons	**15**	**2018**	67	67		**67**	**Admin. & Lounge painted 2019**
Heritage ES - Paint - Cafeteria	**15**	**2018**	67	67		**67**	
Heritage ES - Paint - Library	**15**	**2018**	67	67		**67**	**Lower walls have been painted**
Heritage ES - Paint - Gyms	**20**	**2019**	80	80		**80**	**LOGO Original**
Heritage ES - Paint - Exterior	**20**	**2019**	80	80		**80**	
Heritage ES - Paint - Hallways	**20**	**2018**	75	75		**75**	

Hicks ES

Year Built / Age 2004 / 19

Campus Square Footage 100,479

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2004**	**62**				
Hicks ES - HVAC	**20**	**2004**	5	5	-25%	**4**	**CHILLER; look at proximatey to wall/air circulation**
Hicks ES - HVAC - Controls	**20**	**2004**	5	5		**5**	**Controls = I/net**
Hicks ES - Ceiling and Lights	**20**	**2004**	5	5		**5**	
Hicks ES - Roof - Shingled	**20**	**2004**	5	5	18%	**6**	
Hicks ES - Electrical Switchgear	**30**	**2004**	37	37	1%	**37**	
Hicks ES - Elevator	**25**	**2004**	24	20	15%	**25**	**Otis**
Hicks ES - Fire Safety - Fire Alarm	**20**	**2004**	5	5	14%	**6**	**Edwards EST 2 - Limited Parts**
Hicks ES - Fire Safety - ERRS	**-**					**-**	
Hicks ES - Fire Safety - Sprinkler System	**50**	**2004**	62	62	17%	**72**	
Hicks ES - Food Service Boilers	**20**	**2019**	80	80		**80**	
Hicks ES - Food Service Freezers	**20**	**2004**	5	5		**5**	
Hicks ES - Generator	**40**	**2004**	53	53		**53**	**Generac - Diesel; 80KW**
Hicks ES - Shade Structure - Main	**-**					**-**	
Hicks ES - Playground - Main	**20**	**2004**	5	5		**5**	
Hicks ES - Shade Structure - Pre-K	**-**					**-**	
Hicks ES - Playground - Pre-K	**20**	**2004**	5	5		**5**	**2020 Added stairs**
Hicks ES - Perf Arts - Curtains	**20**	**2004**	5	5		**5**	
Hicks ES - Perf Arts - Stage Lighting/panel	**25**	**2004**	24	15		**20**	
Hicks ES - Café/Gym - Partition Wall	**20**	**2004**	5	5		**5**	
Hicks ES - Flooring - Classrooms	**15**	**2010**	13	13		**13**	**Carpet Squares; Art room is VCT**
Hicks ES - Flooring - Corridors	**20**	**2004**	5	5		**5**	**Ceramic, VCT. Stairs-Terrazzo**
Hicks ES - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet Squares**
Hicks ES - Flooring - Offices	**15**	**2009**	7	7		**7**	**Carpet Replaced 2009-2010**
Hicks ES - Flooring - Cafeteria	**20**	**2004**	5	5		**5**	**VCT**
Hicks ES - Flooring - Kitchen	**50**	**2004**	62	62		**62**	**Terrazzo**
Hicks ES - Flooring - Gym	**20**	**2004**	5	5		**5**	**VCT**
Hicks ES - Plastic Laminate	**40**	**2004**	53	45		**49**	
Hicks ES - Doors	**20**	**2004**	5	5		**5**	**Golden Oak**
Hicks ES - Door Hardware	**20**	**2004**	5	5		**5**	**Levers**
Hicks ES - Casework (Built-Ins)	**20**	**2004**	5	5		**5**	
Hicks ES - Restrooms - Faculty	**20**	**2004**	5	5		**5**	**Ceramic tile**
Hicks ES - Restrooms - Student	**20**	**2004**	5	5		**5**	**Gym-VCT, Ceramic tile, plastic partitions**
Hicks ES - Marquee	**30**	**2004**	37	25		**31**	
Hicks ES - Paving - Parking Lots	**50**	**2004**	62	50		**56**	**Concrete, slight cracking; stained**
Hicks ES - Paving - Sidewalks	**40**	**2004**	53	53		**53**	
Hicks ES - Exterior Lighting	**20**	**2021**	90	90		**90**	**Light poles & wall packs LED 2021**
Hicks ES - Paint - Commons	**15**	**2004**	-27	0		**-13**	**2013 lower areas; Admin. Areas painted 2019**
Hicks ES - Paint - Cafeteria	**15**	**2004**	-27	0		**-13**	**2013 Lower areas maintained, higher-original**
Hicks ES - Paint - Library	**15**	**2004**	-27	0		**-13**	
Hicks ES - Paint - Gyms	**20**	**2004**	5	5		**5**	**Lower areas maintained, higher-original**
Hicks ES - Paint - Exterior	**20**	**2018**	75	75		**75**	**Hand Rails painted 2019**
Hicks ES - Paint - Hallways	**20**	**2004**	5	5		**5**	

Highland Village ES

Year Built / Age 1981 / 42

Campus Square Footage 63,823

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1981**	**16**				
Highland Village ES - Foundation	**50**	**1981**	16	16		**16**	**Slab-On-Grade**
Highland Village ES - HVAC - Original	**20**	**2016**	65	65	13%	**73**	**RTU**
Highland Village ES - HVAC - 1990 Addition	**20**	**2016**	65	65	13%	**73**	**RTU**
Highland Village ES - HVAC - Controls	**20**	**2016**	65	65		**65**	**Controls = Alerton**
Highland Village ES - Ceiling and Lights - Original	**20**	**2016**	65	70		**68**	**LED**
Highland Village ES - Ceiling and Lights - 1990 Addition	**20**	**2016**	65	70		**68**	**LED**
Highland Village ES - Roof - Flat - Original	**20**	**2016**	65	65	-8%	**60**	
Highland Village ES - Roof - Flat - 1990 Addition	**20**	**2016**	65	65	-8%	**60**	
Highland Village ES - Electrical Switchgear	**30**	**2016**	77	77	5%	**81**	**Eaton**
Highland Village ES - Fire Safety - Fire Alarm	**20**	**2016**	65	65	-42%	**37**	**Edwards EST 3; voice evac.**
Highland Village ES - Fire Safety - ERRS	**-**					**-**	
Highland Village ES - Fire Safety - Sprinkler Sys-Orginal	**50**	**2016**	86	86		**86**	**100% sprinkled**
Highland Village ES - Fire Safety - Sprinkler Sys - 1990 Add	**50**	**1990**	34	34	13%	**38**	
Highland Village ES - Food Service Boilers	**20**	**2009**	30	30		**30**	
Highland Village ES - Food Service Freezers	**20**	**2016**	65	65		**65**	**Boxes Re-Used**
Highland Village ES - Generator	**40**	**2016**	83	83		**83**	**Generac - Diesel; 225 KW**
Highland Village ES - Shade Structure - Main	**20**	**2019**	80	80		**80**	
Highland Village ES - Playground - Main	**20**	**2005**	10	10		**10**	**Little Tikes; some cracking and fading**
Highland Village ES - Shade Structure - Pre-K	**-**					**-**	**N/A**
Highland Village ES - Playground - Pre-K	**-**					**-**	**N/A**
Highland Village ES - Perf Arts - Curtains	**20**	**2016**	65	65		**65**	
Highland Village ES - Perf Arts - Stage Lghtng/panel	**25**	**2016**	72	72		**72**	**LED**
Highland Village ES - Flooring - Classrooms	**20**	**2016**	65	65		**65**	**VCT**
Highland Village ES - Flooring - Corridors	**20**	**2016**	65	65		**65**	**VCT**
Highland Village ES - Flooring - Library	**20**	**2016**	65	65		**65**	**VCT**
Highland Village ES - Flooring - Offices	**15**	**2016**	53	53		**53**	**Carpet**
Highland Village ES - Flooring - Cafeteria	**20**	**2016**	65	65		**65**	**VCT**
Highland Village ES - Flooring - Kitchen	**50**	**1981**	16	16		**16**	**Ceramic**
Highland Village ES - Flooring - Gym	**20**	**2016**	65	65		**65**	**VCT**
Highland Village ES - Plastic Laminate	**40**	**2016**	83	83		**83**	
Highland Village ES - Doors	**20**	**2017**	70	70		**70**	**Dark Standard**
Highland Village ES - Door Hardware	**20**	**2017**	70	70		**70**	**Levers**
Highland Village ES - Casework (Built-Ins)	**20**	**2016**	65	65		**65**	
Highland Village ES - Restrooms - Faculty	**20**	**2016**	65	65		**65**	**Ceramic**
Highland Village ES - Restrooms - Student - Orginal	**20**	**2016**	65	65		**65**	
Highland Village ES - Restrooms - Student - 1990 Addition	**20**	**2016**	65	65		**65**	
Highland Village ES - Marquee	**30**	**2007**	47	47		**47**	**Not lit; refreshed 2021**
Highland Village ES - Paving - Parking Lots	**50**	**2009**	72	72		**72**	
Highland Village ES - Paving - Sidewalks	**40**	**1981**	-5	5		**0**	**Concrete, heaving around building; work as needed**
Highland Village ES - Exterior Lighting	**20**	**2016**	65	65		**65**	**LED**
Highland Village ES - Paint - Commons	**15**	**2016**	53	53		**53**	
Highland Village ES - Paint - Cafeteria	**15**	**2016**	53	53		**53**	
Highland Village ES - Paint - Library	**15**	**2016**	53	53		**53**	
Highland Village ES - Paint - Gyms	**20**	**2016**	65	65		**65**	
Highland Village ES - Paint - Exterior	**20**	**2016**	65	65		**65**	
Highland Village ES - Paint - Hallways	**20**	**2016**	65	65		**65**	

Homestead ES

Year Built / Age 1999 / 24

Campus Square Footage 74,375

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1999**	**52**				
Homestead ES - HVAC	**20**	**2022**	95	95	20%	**100**	**RTU**
Homestead ES - HVAC - Controls	**20**	**2022**	95	95		**95**	**Controls = Reliable**
Homestead ES - Ceiling and Lights	**20**	**2022**	95	95		**95**	**LED**
Homestead ES - Roof - Flat	**20**	**2022**	95	95	20%	**100**	
Homestead ES - Electrical Switchgear	**30**	**1999**	20	20	9%	**22**	
Homestead ES - Fire Safety - Fire Alarm	**20**	**2022**	95	95		**95**	**Edwards EST 3**
Homestead ES - Fire Safety - ERRS		**2022**				**-**	**Tracking only**
Homestead ES - Fire Safety - Sprinkler System	**50**	**1999**	52	52	17%	**61**	
Homestead ES - Food Service Boilers	**20**	**2008**	25	25		**25**	
Homestead ES - Food Service Freezers	**20**	**2022**	95	95		**95**	**Flat floor transition -**
Homestead ES - Generator	**40**	**2021**	95	95		**95**	**Cummins - Diesel; 40KW**
Homestead ES - Shade Structure - Main	**20**	**2009**	30	30		**30**	**1 main shade structure and 1 over sitting area; outdated equip.; Campus adding shade**
Homestead ES - Playground - Main	**20**	**2021**	90	90		**90**	**Good Shape**
Homestead ES - Shade Structure - Pre-K	**-**					**-**	
Homestead ES - Playground - Pre-K	**-**					**-**	
Homestead ES - Perf Arts - Curtains	**20**	**2022**	95	95		**95**	
Homestead ES - Perf Arts - Stage Lighting/panel	**25**	**2022**	96	96		**96**	
Homestead ES - Flooring - Classrooms	**20**	**2013**	50	30		**40**	**LVT (glue issue), Music room: VCT 2012; 508, 203,314 VCT 2021**
Homestead ES - Flooring - Corridors	**20**	**2010**	35	35		**35**	**VCT**
Homestead ES - Flooring - Library	**15**	**2022**	93	93		**93**	
Homestead ES - Flooring - Offices	**15**	**2022**	93	93		**93**	
Homestead ES - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	
Homestead ES - Flooring - Kitchen	**50**	**1999**	52	25		**39**	**Terrazzo**
Homestead ES - Flooring - Gym	**20**	**2013**	50	50		**50**	**LVT**
Homestead ES - Plastic Laminate	**40**	**2022**	98	98		**98**	
Homestead ES - Doors	**20**	**2022**	95	95		**95**	
Homestead ES - Door Hardware	**20**	**2022**	95	95		**95**	**Levers**
Homestead ES - Casework (Built-Ins)	**20**	**2022**	95	95		**95**	
Homestead ES - Restrooms - Faculty	**20**	**2022**	95	95		**95**	
Homestead ES - Restrooms - Student	**20**	**2022**	95	95		**95**	
Homestead ES - Marquee	**15**	**2016**	53	53		**53**	**Replaced in 2016 with 1/2 LED; digital; 2023 new equipment**
Homestead ES - Paving - Parking Lots	**50**	**1999**	52	45		**49**	**Concrete**
Homestead ES - Paving - Sidewalks	**40**	**1999**	40	40		**40**	
Homestead ES - Exterior Lighting	**20**	**2022**	95	95		**95**	
Homestead ES - Paint - Commons	**15**	**2022**	93	93		**93**	
Homestead ES - Paint - Cafeteria	**15**	**2022**	93	93		**93**	
Homestead ES - Paint - Library	**15**	**2022**	93	93		**93**	
Homestead ES - Paint - Gyms	**20**	**2022**	95	95		**95**	
Homestead ES - Paint - Exterior	**20**	**2021**	90	90		**90**	
Homestead ES - Paint - Hallways	**20**	**2022**	95	95		**95**	

Independence ES

Year Built / Age 2008 / 15

Campus Square Footage 107,000

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2008**	**70**				
Independence ES - HVAC	**20**	**2008**	25	30	-14%	**24**	**CHILLER; 2 new boilers 2018**
Independence ES - HVAC - Controls	**20**	**2008**	25	25		**25**	**Controls = Alerton**
Independence ES - Ceiling and Lights	**20**	**2008**	25	25		**25**	**T5**
Independence ES - Roof - Shingled	**20**	**2008**	25	25	-50%	**13**	
Independence ES - Electrical Switchgear	**30**	**2008**	50	50	-9%	**46**	
Independence ES - Elevator	**25**	**2008**	40	40	12%	**45**	**Schindler**
Independence ES - Fire Safety - Fire Alarm	**20**	**2008**	25	25	16%	**29**	**Edwards Quickstart**
Independence ES - Fire Safety - ERRS	-					-	
Independence ES - Fire Safety - Sprinkler System	**50**	**2008**	70	70	16%	**81**	
Independence ES - Food Service Boilers	**20**	**2008**	25	25		**25**	
Independence ES - Food Service Freezers	**20**	**2008**	25	25		**25**	
Independence ES - Generator	**40**	**2008**	63	63		**63**	**Generac - Diesel; 200 KW**
Independence ES - Shade Structure - Main	**20**	**2009**	30	30		**30**	**Sail shade structure on main only; have had some repairs**
Independence ES - Playground - Main	**20**	**2008**	25	30		**28**	**Game Time; Volta spinner 2018; 3 additional swing set 2020; fair**
Independence ES - Shade Structure - Pre-K	**20**	**2022**	95	95		**95**	**Campus adding Shade Structure Summer 2022**
Independence ES - Playground - Pre-K	**20**	**2010**	35	35		**35**	**Peeling/bubbling on Pre-K stairs; slight paint fade.**
Independence ES - Perf Arts - Curtains	**20**	**2008**	25	25		**25**	
Independence ES - Perf Arts - Stage Lighting/panel	**25**	**2008**	40	40		**40**	
Independence ES - Café/Gym - Partition Wall	**20**	**2008**	25	25		**25**	
Independence ES - Flooring - Classrooms	**15**	**2008**	0	5		**3**	**Carpet Squares**
Independence ES - Flooring - Corridors	**20**	**2008**	25	25		**25**	**VCT, steps-terrazzo**
Independence ES - Flooring - Library	**15**	**2008**	0	5		**3**	**Carpet Squares**
Independence ES - Flooring - Offices	**15**	**2008**	0	5		**3**	**Carpet Squares**
Independence ES - Flooring - Cafeteria	**20**	**2008**	25	25		**25**	**VCT**
Independence ES - Flooring - Kitchen	**50**	**2008**	70	70		**70**	**Concrete**
Independence ES - Flooring - Gym	**20**	**2008**	25	25		**25**	**VCT**
Independence ES - Plastic Laminate	**40**	**2008**	63	53		**58**	
Independence ES - Doors	**20**	**2008**	25	25		**25**	
Independence ES - Door Hardware	**20**	**2008**	25	25		**25**	
Independence ES - Casework (Built-Ins)	**20**	**2008**	25	25		**25**	
Independence ES - Restrooms - Faculty	**20**	**2008**	25	25		**25**	**Ceramic**
Independence ES - Restrooms - Student	**20**	**2008**	25	25		**25**	**Ceramic**
Independence ES - Marquee	**30**	**2008**	50	50		**50**	
Independence ES - Paving - Parking Lots	**50**	**2008**	70	70		**70**	**Concrete**
Independence ES - Paving - Sidewalks	**40**	**2008**	63	63		**63**	**Concrete**
Independence ES - Exterior Lighting	**20**	**2021**	90	95		**93**	**Light poles and wall packs LED 2021**
Independence ES - Paint - Commons	**15**	**2017**	60	60		**60**	**Admin. Areas painted 2019**
Independence ES - Paint - Cafeteria	**15**	**2015**	47	47		**47**	
Independence ES - Paint - Library	**15**	**2015**	47	47		**47**	
Independence ES - Paint - Gyms	**20**	**2008**	25	25		**25**	
Independence ES - Paint - Exterior	**20**	**2008**	25	25		**25**	
Independence ES - Paint - Hallways	**20**	**2008**	25	25		**25**	

Indian Creek ES

Year Built / Age 1985 / 38

Campus Square Footage 76,172

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1985**	**24**				
Indian Creek ES - Foundation	**50**	**1985**	24	24		**24**	**Slab-On-Grade**
Indian Creek ES - HVAC	**20**	**2007**	20	15	-32%	**12**	**RTU**
Indian Creek ES - HVAC - 2002 Addition	**20**	**2002**	-5	5	-32%	**0**	
Indian Creek ES - HVAC - Controls	**20**	**2007**	20	20		**20**	**Controls = Alerton**
Indian Creek ES - Ceiling and Lights	**20**	**2007**	20	15		**18**	**T5**
Indian Creek ES - Roof - Flat - Original	**20**	**2007**	20	20	5%	**21**	
Indian Creek ES - Roof - Flat - 2002 Addition	**20**	**2002**	-5	5	5%	**0**	
Indian Creek ES - Electrical Switchgear	**30**	**2007**	47	40	3%	**45**	**Original Panels**
Indian Creek ES - Fire Safety - Fire Alarm	**20**	**2007**	20	20	18%	**24**	**Edwards EST 2 - Limited Parts**
Indian Creek ES - Fire Safety - ERRS	**-**					**-**	
Indian Creek ES - Fire Safety - Sprinkler System	**50**	**2007**	68	68	17%	**80**	
Indian Creek ES - Food Service Boilers	**20**	**2008**	25	25		**25**	
Indian Creek ES - Food Service Freezers	**20**	**2007**	20	20		**20**	
Indian Creek ES - Generator	**-**					**-**	
Indian Creek ES - Shade Structure - Main	**-**					**-**	
Indian Creek ES - Playground - Main	**20**	**2009**	30	25		**28**	**Paint fading; Drainage problems; showing more wear; fair**
Indian Creek ES - Shade Structure - Pre-K	**-**					**-**	
Indian Creek ES - Playground - Pre-K	**20**	**2014**	55	55		**55**	**Drainage problem; good shape**
Indian Creek ES - Perf Arts - Curtains	**20**	**2018**	75	75		**75**	
Indian Creek ES - Perf Arts - Stage Lighting/panel	**25**	**2018**	80	80		**80**	
Indian Creek ES - Flooring - Classrooms-VCT	**20**	**2020**	85	85		**85**	**VCT**
Indian Creek ES - Flooring - Corridors-VCT	**20**	**2020**	85	85		**85**	**VCT**
Indian Creek ES - Flooring - Library	**20**	**2020**	85	85		**85**	**VCT**
Indian Creek ES - Flooring - Offices - Carpet	**15**	**2020**	80	80		**80**	**Carpet**
Indian Creek ES - Flooring - Offices - LVT	**20**	**2020**	85	85		**85**	**LVT**
Indian Creek ES - Flooring - Cafeteria	**20**	**2020**	85	85		**85**	**VCT**
Indian Creek ES - Flooring - Kitchen	**50**	**1985**	24	24		**24**	**Terrazzo**
Indian Creek ES - Flooring - Gym	**20**	**2020**	85	85		**85**	**VCT**
Indian Creek ES - Plastic Laminate	**40**	**2018**	88	88		**88**	**2002 addition is original**
Indian Creek ES - Doors	**20**	**1985**	-90	0		**-45**	
Indian Creek ES - Door Hardware	**20**	**1985**	-90	0		**-45**	**50/50 Knobs/Levers**
Indian Creek ES - Casework (Built-Ins)	**20**	**1985**	-90	0		**-45**	
Indian Creek ES - Restrooms - Faculty	**20**	**2013**	50	50		**50**	**Ceramic Tile**
Indian Creek ES - Restrooms - Student	**20**	**2013**	50	50		**50**	**Tile, CMU partitions**
Indian Creek ES - Restrooms - 2002 Addition	**20**	**2002**	-5	5		**0**	
Indian Creek ES - Marquee	**30**	**2013**	67	67		**67**	**Replaced 2013**
Indian Creek ES - Paving - Parking Lots	**50**	**1985**	24	24		**24**	
Indian Creek ES - Paving - Sidewalks	**40**	**1985**	5	15		**10**	
Indian Creek ES - Exterior Lighting	**20**	**2021**	90	90		**90**	**Pole lights LED 2021**
Indian Creek ES - Paint - Commons	**15**	**2018**	67	67		**67**	**Ceramic Tile, CMU, sheetrock; New PLAM Panels 2018**
Indian Creek ES - Paint - Cafeteria	**15**	**2018**	67	67		**67**	**Ceramic Tile painted, cmu painted; Kitchen 2023**
Indian Creek ES - Paint - Library	**15**	**2014**	40	40		**40**	
Indian Creek ES - Paint - Gyms	**20**	**2014**	55	55		**55**	**Carpet on bench**
Indian Creek ES - Paint - Exterior	**20**	**2007**	20	20		**20**	
Indian Creek ES - Paint - Hallways	**20**	**2018**	75	75		**75**	**Ceramic Tile, CMU, sheetrock;**

Lakeland ES

Year Built / Age 2008 / 15

Campus Square Footage 107,000

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2008**	**70**				
Lakeland ES - HVAC	**20**	**2008**	25	25	-21%	**20**	**CHILLER; Mcquay Chillers**
Lakeland ES - HVAC - Controls	**20**	**2008**	25	25		**25**	**Controls = Alerton**
Lakeland ES - Ceiling and Lights	**20**	**2008**	25	25		**25**	**T-5**
Lakeland ES - Roof - Shingled	**20**	**2008**	25	25	19%	**30**	
Lakeland ES - Electrical Switchgear	**30**	**2008**	50	50	-19%	**40**	
Lakeland ES - Elevators	**25**	**2010**	48	48	-9%	**44**	**Schlinder**
Lakeland ES - Fire Safety - Fire Alarm	**20**	**2008**	25	30	15%	**32**	**Edwards IO; panel replaced 2018**
Lakeland ES - Fire Safety - ERRS	-					-	
Lakeland ES - Fire Safety - Sprinkler System	**50**	**2008**	70	70	-17%	**58**	
Lakeland ES - Food Service Boilers	**20**	**2008**	25	25		**25**	
Lakeland ES - Food Service Freezers	**20**	**2008**	25	25		**25**	
Lakeland ES - Generator	**40**	**2008**	63	63		**63**	**Olympian - Diesel; 200 KW**
Lakeland ES - Shade Structure - Main	-					-	
Lakeland ES - Playground - Main	**20**	**2008**	25	25		**25**	**Game Time**
Lakeland ES - Shade Structure - Pre-K	-					-	
Lakeland ES - Playground - Pre-K	-					-	
Lakeland ES - Perf Arts - Curtains	**20**	**2008**	25	25		**25**	
Lakeland ES - Perf Arts - Stage Lightng/panel	**25**	**2008**	40	25		**33**	
Lakeland ES - Flooring - Classrooms - Carpet	**15**	**2008**	0	5		**3**	**Carpet Squares**
Lakeland ES - Flooring - Classrooms - VCT	**20**	**2008**	25	25		**25**	**VCT**
Lakeland ES - Flooring - Corridors	**20**	**2008**	25	25		**25**	**VCT**
Lakeland ES - Flooring - Library	**15**	**2008**	0	5		**3**	**Carpet**
Lakeland ES - Flooring - Offices	**15**	**2008**	0	5		**3**	**Carpet**
Lakeland ES - Flooring - Cafeteria	**20**	**2008**	25	25		**25**	**VCT**
Lakeland ES - Flooring - Kitchen	**50**	**2008**	70	70		**70**	**Concrete**
Lakeland ES - Flooring - Gym	**20**	**2008**	25	25		**25**	**VCT**
Lakeland ES - Plastic Laminate	**40**	**2008**	63	63		**63**	
Lakeland ES - Doors	**20**	**2008**	25	25		**25**	
Lakeland ES - Door Hardware	**20**	**2008**	25	25		**25**	
Lakeland ES - Casework (Built-Ins)	**20**	**2008**	25	25		**25**	
Lakeland ES - Restrooms - Faculty	**20**	**2008**	25	25		**25**	**Ceramic tile floor, walls**
Lakeland ES - Restrooms - Student	**20**	**2008**	25	30		**28**	**Ceramic tile floor, walls. CMU partitions with ceramic tile, solid wood doors.**
Lakeland ES - Marquee	**30**	**2008**	50	50		**50**	
Lakeland ES - Paving - Parking Lots	**50**	**2008**	70	70		**70**	**Concrete**
Lakeland ES - Paving - Sidewalks	**40**	**2008**	63	63		**63**	**Concrete**
Lakeland ES - Exterior Lighting	**20**	**2008**	25	25		**25**	
Lakeland ES - Paint - Commons	**15**	**2008**	0	5		**3**	**Brick, P-Lam; Office areas painted 2019**
Lakeland ES - Paint - Cafeteria	**15**	**2008**	0	5		**3**	**maintaining lower walls**
Lakeland ES - Paint - Library	**15**	**2008**	0	5		**3**	
Lakeland ES - Paint - Gyms	**20**	**2008**	25	25		**25**	**2016 painted up to 10 ft.**
Lakeland ES - Paint - Exterior	**20**	**2008**	25	25		**25**	
Lakeland ES - Paint - Hallways	**20**	**2008**	25	25		**25**	**Brick, P-Lam**

Lewisville ES

Year Built / Age 2010 / 13

Campus Square Footage 101,110

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2010**	**74**				
Lewisville ES - HVAC	**20**	**2010**	35	35	-17%	**29**	**CHILLER;2021 hot water coil replaced on gym unit**
Lewisville ES - HVAC - Control	**20**	**2010**	35	35		**35**	**Controls = Alerton**
Lewisville ES - Ceiling and Lights	**20**	**2010**	35	35		**35**	
Lewisville ES - Roof - Shingled	**20**	**2010**	35	25	-27%	**22**	**Kitchen Flat**
Lewisville ES - Electrical Switchgear	**30**	**2010**	57	57	-8%	**52**	
Lewisville ES - Elevators	**25**	**2010**	48	48	16%	**56**	**Schlinder**
Lewisville ES - Fire Safety - Fire Alarm	**20**	**2010**	35	25	-6%	**28**	**Harrington HS3200; unsupported**
Lewisville ES - Fire Safety - ERRS	**-**					**-**	
Lewisville ES - Fire Safety - Sprinkler System	**50**	**2010**	74	74	18%	**87**	
Lewisville ES - Food Service Boilers	**20**	**2009**	30	30		**30**	
Lewisville ES - Food Service Freezers	**20**	**2010**	35	35		**35**	
Lewisville ES - Generator	**40**	**2010**	68	68		**68**	**Cummins - Diesel; 200 KW**
Lewisville ES - Shade Structure - Main	**-**					**-**	
Lewisville ES - Playground - Main	**20**	**2010**	35	35		**35**	**Game Time; High Traffic; Fencing removed; some fading due to only partial shade from trees; overall ok shape**
Lewisville ES - Shade Structure - Pre-K	**-**					**-**	
Lewisville ES - Playground - Pre-K	**-**					**-**	
Lewisville ES - Perf Arts - Curtains	**20**	**2010**	35	35		**35**	
Lewisville ES - Perf Arts - Stage Lightng/panel	**25**	**2010**	48	48		**48**	
Lewisville ES - Flooring - Classrooms - Carpet	**15**	**2010**	13	13		**13**	**Carpet**
Lewisville ES - Flooring - Classrooms - VCT	**20**	**2010**	35	35		**35**	**VCT**
Lewisville ES - Flooring - Corridors	**20**	**2010**	35	35		**35**	**VCT**
Lewisville ES - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet**
Lewisville ES - Flooring - Offices - Carpet	**15**	**2010**	13	13		**13**	**Carpet**
Lewisville ES - Flooring - Offices - VCT	**20**	**2010**	35	35		**35**	**VCT**
Lewisville ES - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	**VCT**
Lewisville ES - Flooring - Kitchen	**50**	**2010**	74	74		**74**	**Sealed Concrete**
Lewisville ES - Flooring - Gym	**20**	**2010**	35	35		**35**	**VCT**
Lewisville ES - Plastic Laminate	**40**	**2010**	68	68		**68**	
Lewisville ES - Doors	**20**	**2010**	35	35		**35**	
Lewisville ES - Door Hardware	**20**	**2010**	35	35		**35**	
Lewisville ES - Casework (Built-Ins)	**20**	**2010**	35	35		**35**	
Lewisville ES - Restrooms - Faculty	**20**	**2010**	35	35		**35**	**Ceramic tile floor, walls**
Lewisville ES - Restrooms - Student	**20**	**2010**	35	35		**35**	**Ceramic tile floor, walls**
Lewisville ES - Marquee	**30**	**2010**	57	40		**48**	
Lewisville ES - Paving - Parking Lots	**50**	**2010**	74	74		**74**	**Concrete**
Lewisville ES - Paving - Sidewalks	**40**	**2010**	68	68		**68**	**Concrete**
Lewisville ES - Exterior Lighting	**20**	**2010**	35	35		**35**	
Lewisville ES - Paint - Commons	**15**	**2018**	67	67		**67**	
Lewisville ES - Paint - Cafeteria	**15**	**2017**	60	60		**60**	
Lewisville ES - Paint - Library	**15**	**2023**	100	100		**100**	
Lewisville ES - Paint - Gyms	**20**	**2010**	35	35		**35**	**2016 painted up to 10 ft.**
Lewisville ES - Paint - Exterior	**20**	**2010**	35	35		**35**	**Fencing Coating needs review**
Lewisville ES - Paint - Hallways	**20**	**2010**	35	35		**35**	**P-Lam walls, paint / drywall**

Liberty ES

Year Built / Age 2002 / 21

Campus Square Footage 86,122

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2002**	**58**				
Liberty ES - HVAC - Original	**20**	**2002**	-5	5	-26%	**0**	**RTU**
Liberty ES - HVAC - 2007 Addition	**20**	**2007**	20	20	-26%	**15**	**RTU**
Liberty ES - HVAC - Controls	**20**	**2002**	-5	5		**0**	**2002 & 2007 Controls = I/net**
Liberty ES - Ceiling and Lights - Original	**20**	**2002**	-5	5		**0**	**T-8**
Liberty ES - Ceiling and Lights - 2007 Addition	**20**	**2007**	20	15		**18**	**T-5**
Liberty ES - Roof - Flat - Original	**20**	**2002**	-5	5	-30%	**0**	
Liberty ES -Roof - Flat - 2007 Addition	**20**	**2007**	20	20	-30%	**14**	
Liberty ES - Electrical Switchgear	**30**	**2002**	30	30	6%	**32**	**Square D**
Liberty ES - Fire Safety - Fire Alarm	**20**	**2002**	-5	5	6%	**0**	**Edwards EST 2 - Limited Parts**
Liberty ES - Fire Safety - ERRS	**-**					**-**	
Liberty ES - Fire Safety - Sprinkler System	**50**	**2002**	58	58	3%	**60**	
Liberty ES - Food Service Boilers	**20**	**2020**	85	85		**85**	**Tankless 2020**
Liberty ES - Food Service Freezers	**20**	**2002**	-5	5		**0**	
Liberty ES - Generator	**-**					**-**	
Liberty ES - Shade Structure - Main	**20**	**2020**	85	85		**85**	**5 Shade Structures (2003, 2009 main (replaced shade 2020), 2014, 2016, 2019)**
Liberty ES - Playground - Main	**20**	**2002**	-5	5		**0**	**showing wear & tear**
Liberty ES - Shade Structure - Pre-K	**20**	**2019**	80	80		**80**	
Liberty ES - Playground - Pre-K	**20**	**2018**	75	75		**75**	
Liberty ES - Perf Arts - Curtains	**20**	**2002**	-5	5		**0**	
Liberty ES - Perf Arts - Stage Lghtng/panel	**25**	**2002**	16	5		**11**	**No support & limited parts**
Liberty ES - Flooring - Classrooms-Original	**20**	**2021**	90	90		**90**	**VCT**
Liberty ES - Flooring - Classroom-2007 Add	**15**	**2007**	-7	5		**-1**	**Carpet**
Liberty ES - Flooring - Classrooms-VCT	**20**	**2021**	90	90		**90**	**VCT**
Liberty ES - Flooring - Corridors	**20**	**2002**	-5	5		**0**	**VCT**
Liberty ES - Flooring - Library	**15**	**2021**	87	87		**87**	**Carpet and LVT**
Liberty ES - Flooring - Offices	**20**	**2021**	90	90		**90**	**VCT; Carpet in Principal and AP offices**
Liberty ES - Flooring - Cafeteria	**20**	**2002**	-5	5		**0**	**VCT**
Liberty ES - Flooring - Kitchen	**50**	**2002**	58	50		**54**	**Terrazzo - cracking**
Liberty ES - Flooring - Gym	**20**	**2002**	-5	5		**0**	**VCT**
Liberty ES - Plastic Laminate	**40**	**2002**	48	48		**48**	
Liberty ES - Doors	**20**	**2002**	-5	5		**0**	**Milkwash**
Liberty ES - Door Hardware	**20**	**2002**	-5	5		**0**	**Levers**
Liberty ES - Casework (Built-Ins)	**20**	**2002**	-5	5		**0**	
Liberty ES - Restrooms - Faculty	**20**	**2002**	-5	5		**0**	**Laminate Partitions, 1"x1" ceramic floor, 4"x4" ceramic wall**
Liberty ES - Restrooms - Student	**20**	**2002**	-5	5		**0**	
Liberty ES - Restrooms - 2007 Addition	**20**	**2007**	20	20		**20**	
Liberty ES - Marquee	**30**	**2002**	30	30		**30**	**LED; New doors & paint 2022**
Liberty ES - Paving - Parking Lots	**50**	**2002**	58	58		**58**	**Concrete**
Liberty ES - Paving - Sidewalks	**40**	**2002**	48	48		**48**	**Concrete**
Liberty ES - Exterior Lighting	**20**	**2002**	-5	0		**-3**	**Pole lights & Wall Packs LED bulbs 2020**
Liberty ES - Paint - Commons	**15**	**2017**	60	60		**60**	
Liberty ES - Paint - Cafeteria	**15**	**2014**	40	40		**40**	**2017 painted lower walls**
Liberty ES - Paint - Library	**15**	**2014**	40	40		**40**	
Liberty ES - Paint - Gyms	**20**	**2017**	70	70		**70**	
Liberty ES - Paint - Exterior	**20**	**2002**	-5	5		**0**	**Exterior Doors painted 2019**
Liberty ES - Paint - Hallways	**20**	**2014**	55	55		**55**	

Lillie J Jackson ECC

Year Built / Age 2005 / 18

Campus Square Footage 88,290

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2005**	**64**				
Lillie J Jackson ECC - HVAC	**20**	**2005**	10	10	-24%	**8**	**CHILLER**
Lillie J Jackson ECC - HVAC - Controls	**20**	**2018**	75	75		**75**	**2008 Bond - Enviromatic**
Lillie J Jackson ECC - Ceiling and Lights	**20**	**2005**	10	10		**10**	
Lillie J Jackson ECC - Roof - Flat	**20**	**2005**	10	10	-45%	**5**	
Lillie J Jackson ECC - Roof - Shingled	**20**	**2005**	10	5	-45%	**4**	
Lillie J Jackson ECC - Electrical Switchgear	**30**	**2005**	40	40	7%	**43**	
Lillie J Jackson ECC - Fire Safety - Fire Alarm	**20**	**2005**	10	10	-17%	**8**	**Edwards EST 2 - Limited Parts**
Lillie J Jackson ECC - Fire Safety - ERRS	**-**					**-**	
Lillie J Jackson ECC - Fire Safety - Sprinkler System	**50**	**2005**	64	60	7%	**66**	
Lillie J Jackson ECC - Food Service Boilers	**20**	**2004**	5	5		**5**	
Lillie J Jackson ECC - Food Service Freezers	**20**	**2005**	10	10		**10**	
Lillie J Jackson ECC - Generator	**40**	**2005**	55	55		**55**	**Olympian - Diesel; 100 KW**
Lillie J Jackson ECC - Shade Structure - Main	**-**					**-**	
Lillie J Jackson ECC - Playground - Main	**-**					**-**	
Lillie J Jackson ECC - Shade Structure - Pre-K	**20**	**2005**	10	10		**10**	**2 Shade Structures (2005 sandboxes & 2015 garden)**
Lillie J Jackson ECC - Playground - Pre-K	**20**	**2005**	10	10		**10**	**Added turf to surface 2018; Paint fading; replaced steps 2019**
Lillie J Jackson ECC - Perf Arts - Curtains	**20**	**2005**	10	10		**10**	
Lillie J Jackson ECC - Perf Arts - Stage Lghtng/panel	**25**	**2005**	28	20		**24**	
Lillie J Jackson ECC - Flooring - Classrooms	**20**	**2005**	10	10		**10**	**Mostly VCT, some carpet**
Lillie J Jackson ECC - Flooring - Corridors	**20**	**2005**	10	10		**10**	**VCT, Terrazzo**
Lillie J Jackson ECC - Flooring - Library	**15**	**2005**	-20	5		**-8**	**Carpet**
Lillie J Jackson ECC - Flooring - Offices	**15**	**2005**	-20	5		**-8**	**Carpet**
Lillie J Jackson ECC - Flooring - Cafeteria	**20**	**2005**	10	10		**10**	**VCT**
Lillie J Jackson ECC - Flooring - Kitchen	**50**	**2005**	64	64		**64**	**Terrazzo, some cracks**
Lillie J Jackson ECC - Flooring - Gym	**20**	**2005**	10	10		**10**	**VCT**
Lillie J Jackson ECC - Plastic Laminate	**40**	**2005**	55	55		**55**	
Lillie J Jackson ECC - Doors	**20**	**2005**	10	10		**10**	
Lillie J Jackson ECC - Door Hardware	**20**	**2005**	10	10		**10**	
Lillie J Jackson ECC - Casework (Built-Ins)	**20**	**2005**	10	10		**10**	
Lillie J Jackson ECC - Restrooms - Faculty	**20**	**2005**	10	10		**10**	**1"x1" ceramic tile floor, wall, including health**
Lillie J Jackson ECC - Restrooms - Student	**20**	**2005**	10	10		**10**	**Ceramic floor (1x1), wall, plastic partitions**
Lillie J Jackson ECC - Marquee	**30**	**2005**	40	30		**35**	
Lillie J Jackson ECC - Paving - Parking Lots	**50**	**2005**	64	64		**64**	**Concrete**
Lillie J Jackson ECC - Paving - Sidewalks	**40**	**2005**	55	25		**40**	**Concrete / pavers, some movement; 2016 some pavers replaced**
Lillie J Jackson ECC - Exterior Lighting	**20**	**2005**	10	10		**10**	
Lillie J Jackson ECC - Paint - Commons	**15**	**2005**	-20	0		**-10**	**P-Lam, paint, tile**
Lillie J Jackson ECC - Paint - Cafeteria	**15**	**2005**	-20	0		**-10**	**CMU**
Lillie J Jackson ECC - Paint - Library	**15**	**2017**	60	60		**60**	**2017 color change**
Lillie J Jackson ECC - Paint - Gyms	**20**	**2005**	10	10		**10**	
Lillie J Jackson ECC - Paint - Exterior	**20**	**2019**	80	80		**80**	
Lillie J Jackson ECC - Paint - Hallways	**20**	**2015**	60	60		**60**	**All frames and jams**

McAuliffe ES

Year Built / Age 1987 / 36

Campus Square Footage 78,776

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1987**	**28**				
McAuliffe ES - Foundation	**50**	**1987**	28	25		**27**	**Slab-On-Grade**
McAuliffe ES - HVAC	**20**	**2010**	35	35	4%	**37**	**RTU**
McAuliffe ES - HVAC - Controls	**20**	**2010**	35	35		**35**	**Controls = Alerton**
McAuliffe ES - Ceiling and Lights	**20**	**2010**	35	30		**33**	**T-5**
McAuliffe ES - Roof - Flat	**20**	**2019**	80	80	7%	**86**	
McAuliffe ES - Electrical Switchgear	**30**	**2010**	57	57	-4%	**54**	**Square D**
McAuliffe ES - Fire Safety - Fire Alarm	**20**	**2009**	30	25	-32%	**19**	**Edwards EST 2 - Limited Parts**
McAuliffe ES - Fire Safety - ERRS	**-**					**-**	
McAuliffe ES - Fire Safety - Sprinkler System	**50**	**1987**	28	28	-27%	**20**	
McAuliffe ES - Food Service Boilers	**20**	**2020**	85	85		**85**	**Tankless 2020**
McAuliffe ES - Food Service Freezers	**20**	**2009**	30	30		**30**	
McAuliffe ES - Generator	**40**	**2009**	65	65		**65**	**Cummins - Diesel; 80 KW**
McAuliffe ES - Shade Structure - Main	**-**					**-**	
McAuliffe ES - Playground - Main	**20**	**2009**	30	20		**25**	**Drainage issues at basketball court; some peeling/cracking of equip.; Little Tikes**
McAuliffe ES - Shade Structure - Pre-K	**20**	**2022**	95	95		**95**	**partial cover**
McAuliffe ES - Playground - Pre-K	**20**	**2022**	95	95		**95**	**Pour in Play**
McAuliffe ES - Perf Arts - Curtains	**20**	**2003**	0	5		**3**	
McAuliffe ES - Perf Arts - Stage Lighting/panel	**25**	**2010**	48	25		**37**	**Lehigh - No support**
McAuliffe ES - Flooring - Classrooms	**20**	**2010**	35	35		**35**	**VCT**
McAuliffe ES - Flooring - Corridors	**20**	**2006**	15	15		**15**	**VCT, P-Lam**
McAuliffe ES - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet/VCT**
McAuliffe ES - Flooring - Offices	**20**	**2010**	35	35		**35**	**VCT/Carpet**
McAuliffe ES - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	**VCT, P-Lam**
McAuliffe ES - Flooring - Kitchen	**50**	**1987**	28	28		**28**	**Terrazzo**
McAuliffe ES - Flooring - Gym	**20**	**2004**	5	5		**5**	**VCT**
McAuliffe ES - Plastic Laminate	**40**	**2010**	68	68		**68**	
McAuliffe ES - Doors	**20**	**1987**	-80	0		**-40**	**Wood Laminate Doors**
McAuliffe ES - Door Hardware	**20**	**1987**	-80	0		**-40**	**Levers**
McAuliffe ES - Casework (Built-Ins)	**20**	**1987**	-80	0		**-40**	**Grey tops and wood cabinets**
McAuliffe ES - Restrooms - Faculty	**20**	**2010**	35	35		**35**	
McAuliffe ES - Restrooms - Student	**20**	**2010**	35	35		**35**	
McAuliffe ES - Marquee	**15**	**2010**	13	13		**13**	**LED; minor repairs in 2020**
McAuliffe ES - Paving - Parking Lots	**50**	**1987**	28	28		**28**	
McAuliffe ES - Paving - Sidewalks	**40**	**1987**	10	10		**10**	**Some settling and cracking**
McAuliffe ES - Exterior Lighting - Original	**20**	**2002**	-5	5		**0**	**50/50 LED; Need new lighting design**
McAuliffe ES - Exterior Lighting - Front Area	**20**	**2014**	55	55		**55**	**H.I.D.**
McAuliffe ES - Paint - Commons	**15**	**2010**	13	13		**13**	
McAuliffe ES - Paint - Cafeteria	**15**	**2010**	13	13		**13**	**maintaining lower walls; kitchen 2023**
McAuliffe ES - Paint - Library	**15**	**2010**	13	13		**13**	
McAuliffe ES - Paint - Gyms	**20**	**2010**	35	35		**35**	**Lower gym walls 2019**
McAuliffe ES - Paint - Exterior	**20**	**2002**	-5	5		**0**	**Rails & Ext. Doors replaced 2017**
McAuliffe ES - Paint - Hallways	**20**	**2010**	35	35		**35**	

Memorial Street ES STEM

Year Built / Age 2021 / 2

Campus Square Footage 117,004

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2021**	**96**				
Memorial ES - Foundation	**50**	**2021**	96	96		**96**	**Slab on Grade**
Memorial ES - HVAC - Original	**20**	**2021**	90	90	20%	**100**	**AAon**
Memorial ES - HVAC - Controls	**20**	**2021**	90	90		**90**	
Memorial ES - Ceiling and Lights	**20**	**2021**	90	90		**90**	**LED**
Memorial ES - Roof - Flat	**20**	**2021**	90	90	20%	**100**	**Roll Roof**
Memorial ES - Roof - Standing Seam	**30**	**2021**	93	93	20%	**100**	**Metal**
Memorial ES - Electrical Switchgear	**30**	**2021**	93	93	20%	**100**	
Memorial ES - Elevator	**25**	**2021**	92	92	20%	**100**	**Otis**
Memorial ES - Fire Safety - Fire Alarm	**20**	**2021**	90	90	20%	**100**	**Edwards EST 3**
Memorial ES - Fire Safety - ERRS		**2021**				**-**	**Tracking only**
Memorial ES - Fire Safety - Sprinkler System	**50**	**2021**	96	96	20%	**100**	
Memorial ES - Storm Shelter - Pressurized Water Tank	**20**	**2021**	90	90		**90**	
Memorial ES - Storm Shelter	**50**	**2021**	96	96		**96**	**Gym**
Memorial ES - Food Service Boilers	**20**	**2021**	90	90		**90**	
Memorial ES - Food Service Freezers	**20**	**2021**	90	90		**90**	
Memorial ES - Generator	**40**	**2021**	95	95		**95**	**Kohler - Diesel; 300 KW**
Memorial ES - Shade Structure - Main	**20**	**2021**	90	90		**90**	
Memorial ES - Playground - Main	**20**	**2021**	90	90		**90**	
Memorial ES - Shade Structure - Pre-K	**20**	**2021**	90	90		**90**	
Memorial ES - Playground - Pre-K	**20**	**2021**	90	90		**90**	
Memorial ES - Perf Arts - Curtains	**20**	**2021**	90	90		**90**	
Memorial ES - Perf Arts - Stage Lighting/panel	**25**	**2021**	92	92		**92**	
Memorial ES - Flooring - Classrooms	**20**	**2021**	90	90		**90**	**LVT**
Memorial ES - Flooring - Corridors	**20**	**2021**	90	90		**90**	**Polished Concrete**
Memorial ES - Flooring - Library	**15**	**2021**	87	87		**87**	**Squares**
Memorial ES - Flooring - Offices	**15**	**2021**	87	87		**87**	**Polished Concrete**
Memorial ES - Flooring - Cafeteria	**50**	**2021**	96	96		**96**	**Polished Concrete**
Memorial ES - Flooring - Kitchen	**50**	**2021**	96	96		**96**	**Epoxy**
Memorial ES - Flooring - Gym	**20**	**2021**	90	90		**90**	**Roll LVT**
Memorial ES - Plastic Laminate	**40**	**2021**	95	95		**95**	
Memorial ES - Doors	**20**	**2021**	90	90		**90**	
Memorial ES - Door Hardware	**20**	**2021**	90	90		**90**	**Mortis**
Memorial ES - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	**Lamninate**
Memorial ES - Restrooms - Faculty	**20**	**2021**	90	90		**90**	**Tile floors and walls**
Memorial ES - Restrooms - Student	**20**	**2021**	90	90		**90**	**plastic partitions**
Memorial ES - Marquee	**15**	**2021**	87	87		**87**	**LED**
Memorial ES - Paving - Parking Lots	**50**	**2021**	96	96		**96**	
Memorial ES - Paving - Sidewalks	**40**	**2021**	95	95		**95**	
Memorial ES - Exterior Lighting	**20**	**2021**	90	90		**90**	**LED**
Memorial ES - Paint - Commons	**15**	**2021**	87	87		**87**	
Memorial ES - Paint - Cafeteria	**15**	**2021**	87	87		**87**	
Memorial ES - Paint - Library	**15**	**2021**	87	87		**87**	
Memorial ES - Paint - Gyms	**20**	**2021**	90	90		**90**	
Memorial ES - Paint - Exterior	**20**	**2021**	90	90		**90**	
Memorial ES - Paint - Hallways	**20**	**2021**	90	90		**90**	

Mill Street ES

Year Built / Age 2019 / 4

Campus Square Footage 112,909

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2019**	**92**				
Mill Street ES - Foundation	**50**	**2019**	92	92		**92**	**slab on void**
Mill Street ES - HVAC - Original	**20**	**2019**	80	80	17%	**93**	**Aaon**
Mill Street ES - HVAC - Controls	**20**	**2019**	80	80		**80**	**Controls = Alerton**
Mill Street ES - Ceiling and Lights	**20**	**2019**	80	80		**80**	**LED**
Mill Street ES - Roof - Flat	**20**	**2019**	80	80	16%	**93**	**2 ply mod bit**
Mill Street ES - Roof - Standing Seam	**30**	**2019**	87	87	16%	**100**	**Metal**
Mill Street ES - Electrical Switchgear	**30**	**2019**	87	87	9%	**95**	
Mill Street ES - Elevator	**25**	**2019**	84	84	20%	**100**	**Otis**
Mill Street ES - Fire Safety - Fire Alarm	**20**	**2019**	80	80	11%	**89**	**EST 3**
Mill Street ES - Fire Safety - ERRS		**2019**				**-**	**Tracking only**
Mill Street ES - Fire Safety - Sprinkler System	**50**	**2019**	92	92	13%	**100**	
Mill Street ES - Storm Shelter - Pressurized Water Tank	**20**	**2019**	80	80		**80**	
Mill Street ES - Storm Shelter	**50**	**2019**	92	92		**92**	**Gym**
Mill Street ES - Food Service Boilers	**20**	**2019**	80	80		**80**	
Mill Street ES - Food Service Freezers	**20**	**2019**	80	80		**80**	
Mill Street ES - Generator	**40**	**2019**	90	90		**90**	**Cummins - Diesel; 100 KW**
Mill Street ES - Shade Structure - Main	**-**					**-**	
Mill Street ES - Playground - Main	**20**	**2019**	80	80		**80**	
Mill Street ES - Shade Structure - Pre-K	**20**	**2020**	85	85		**85**	**Reused structure and canopy from Purnell playground**
Mill Street ES - Playground - Pre-K	**20**	**2019**	80	80		**80**	**2021 added sports court**
Mill Street ES - Perf Arts - Curtains	**20**	**2019**	80	80		**80**	
Mill Street ES - Perf Arts - Stage Lighting/panel	**25**	**2019**	84	84		**84**	**LED**
Mill Street ES - Flooring - Classrooms	**20**	**2019**	80	80		**80**	**VCT**
Mill Street ES - Flooring - Corridors	**20**	**2019**	80	80		**80**	**Concrete and Carpet**
Mill Street ES - Flooring - Library	**15**	**2019**	73	73		**73**	**Carpet**
Mill Street ES - Flooring - Offices	**15**	**2019**	73	73		**73**	**Concrete, Carpet and VCT**
Mill Street ES - Flooring - Cafeteria	**50**	**2019**	92	92		**92**	**Concrete**
Mill Street ES - Flooring - Kitchen	**50**	**2019**	92	92		**92**	**Concrete**
Mill Street ES - Flooring - Gym	**20**	**2021**	90	90		**90**	**replaced flooring 2021 - Sports Flooring**
Mill Street ES - Plastic Laminate	**40**	**2019**	90	90		**90**	
Mill Street ES - Doors	**20**	**2019**	80	80		**80**	**Standard Dark**
Mill Street ES - Door Hardware	**20**	**2019**	80	80		**80**	**Levers**
Mill Street ES - Casework (Built-Ins)	**20**	**2019**	80	80		**80**	**Laminate**
Mill Street ES - Restrooms - Faculty	**20**	**2019**	80	80		**80**	**Plastic partitions**
Mill Street ES - Restrooms - Student	**20**	**2019**	80	80		**80**	**Plastic partitions**
Mill Street ES - Marquee	**15**	**2020**	80	80		**80**	
Mill Street ES - Paving - Parking Lots	**50**	**2019**	92	92		**92**	
Mill Street ES - Paving - Sidewalks	**40**	**2019**	90	90		**90**	
Mill Street ES - Exterior Lighting	**20**	**2019**	80	80		**80**	**LED**
Mill Street ES - Paint - Commons	**15**	**2019**	73	73		**73**	
Mill Street ES - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
Mill Street ES - Paint - Library	**15**	**2019**	73	73		**73**	
Mill Street ES - Paint - Gyms	**20**	**2019**	80	80		**80**	
Mill Street ES - Paint - Exterior	**20**	**2019**	80	80		**80**	
Mill Street ES - Paint - Hallways	**20**	**2019**	80	80		**80**	

Morningside ES

Year Built / Age 1993 / 30

Campus Square Footage 63,853

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1993**	**40**				
Morningside ES - HVAC	**20**	**2012**	45	45	-2%	**44**	**RTU**
Morningside ES - HVAC - Controls	**20**	**2012**	45	45		**45**	**Controls = Alerton**
Morningside ES - Ceiling and Lights	**20**	**2012**	45	45		**45**	
Morningside ES - Roof - Flat	**20**	**2012**	45	45	-42%	**26**	
Morningside ES - Roof - Shingled	**20**	**2012**	45	45	-42%	**26**	
Morningside ES - Electrical Switchgear	**30**	**1993**	0	5	-27%	**2**	
Morningside ES - Fire Safety - Fire Alarm	**20**	**2012**	45	40	12%	**48**	**Harrington**
Morningside ES - Fire Safety - ERRS	**-**					**-**	
Morningside ES - Fire Safety - Sprinkler System	**50**	**1993**	40	40	-50%	**20**	
Morningside ES - Food Service Boilers	**20**	**2012**	45	45		**45**	
Morningside ES - Food Service Freezers	**20**	**2012**	45	45		**45**	
Morningside ES - Generator	**40**	**2012**	73	73		**73**	**Generac - Diesel; 80 KW**
Morningside ES - Shade Structure - Main	**20**	**2006**	15	15		**15**	
Morningside ES - Playground - Main	**20**	**2010**	35	35		**35**	**Bench coating is peeling; minor rust and fading: added volta spinner 2021 & 4 panels in 2022; OK shape**
Morningside ES - Shade Structure - Pre-K	**-**					**-**	
Morningside ES - Playground - Pre-K	**-**					**-**	
Morningside ES - Perf Arts - Curtains	**20**	**2012**	45	45		**45**	
Morningside ES - Perf Arts - Stage Lighting/panel	**25**	**2012**	56	56		**56**	
Morningside ES - Flooring - Classrooms	**20**	**2012**	45	45		**45**	**VCT**
Morningside ES - Flooring - Corridors	**20**	**2012**	45	45		**45**	**VCT**
Morningside ES - Flooring - Library	**20**	**2012**	45	45		**45**	**VCT**
Morningside ES - Flooring - Offices	**20**	**2012**	45	45		**45**	**VCT**
Morningside ES - Flooring - Cafeteria	**20**	**2012**	45	45		**45**	**VCT**
Morningside ES - Flooring - Kitchen	**50**	**1993**	40	40		**40**	**Terrazzo**
Morningside ES - Flooring - Gym	**20**	**2012**	45	40		**43**	**VCT; Bench is carpeted.**
Morningside ES - Plastic Laminate	**40**	**1993**	25	25		**25**	
Morningside ES - Doors	**20**	**1993**	-50	0		**-25**	
Morningside ES - Door Hardware	**20**	**1993**	-50	0		**-25**	**Round Handles (not ADA)**
Morningside ES - Casework (Built-Ins)	**20**	**1993**	-50	0		**-25**	
Morningside ES - Restrooms - Faculty	**20**	**2018**	75	75		**75**	
Morningside ES - Restrooms - Student	**20**	**2018**	75	75		**75**	
Morningside ES - Marquee	**15**	**2018**	67	67		**67**	**LED; digital**
Morningside ES - Paving - Parking Lots	**50**	**1993**	40	40		**40**	
Morningside ES - Paving - Sidewalks	**40**	**1993**	25	25		**25**	**Some heaving**
Morningside ES - Exterior Lighting	**20**	**2012**	45	45		**45**	**Pole lights LED bulbs 2021**
Morningside ES - Paint - Commons	**15**	**2012**	27	27		**27**	**some hallways and offices 2023**
Morningside ES - Paint - Cafeteria	**15**	**2012**	27	27		**27**	**Maintaining lower walls 2023**
Morningside ES - Paint - Library	**15**	**2012**	27	27		**27**	
Morningside ES - Paint - Gyms	**20**	**2012**	45	45		**45**	**Maintaining lower walls**
Morningside ES - Paint - Exterior	**20**	**2012**	45	45		**45**	**Rails & Doors replaced 2017**
Morningside ES - Paint - Hallways	**20**	**2012**	45	45		**45**	**P-Lam from floor up; upper walls painted 2023**

Old Settlers ES

Year Built / Age 1994 / 29

Campus Square Footage 83,850

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1994**	**42**				
Old Settlers ES - HVAC - Orginal	**20**	**2019**	80	80	6%	**85**	
Old Settlers ES - HVAC - 2001 Addition	**20**	**2019**	80	80	6%	**85**	
Old Settlers ES - HVAC - Controls	**20**	**2019**	80	80		**80**	**Controls = Enviromatics/Reliable**
Old Settlers ES - Ceiling and Lights - Orginal	**20**	**2019**	80	80		**80**	**LED**
Old Settlers ES - Ceiling and Lights - 2001 Addition	**20**	**2019**	80	80		**80**	**LED**
Old Settlers ES - Roof - Flat - Original	**20**	**2019**	80	80	4%	**83**	**2 ply mod bit**
Old Settlers ES - Roof - Flat - 2001 Addition	**20**	**2001**	-10	5	4%	**-2**	
Old Settlers ES - Roof - Shingled	**20**	**2019**	80	80	4%	**83**	
Old Settlers ES - Electrical Switchgear	**30**	**1994**	3	3	-8%	**3**	**Square D**
Old Settlers ES - Fire Safety - Fire Alarm	**20**	**2019**	80	80		**80**	**EST 3x**
Old Settlers ES - Fire Safety - ERRS		**2019**				**-**	**Tracking only**
Old Settlers ES - Fire Safety - Sprinkler System	**50**	**1994**	42	42	-5%	**40**	**Heads replaced 2019**
Old Settlers ES - Food Service Boilers	**20**	**2019**	80	80		**80**	**Tank**
Old Settlers ES - Food Service Freezers	**20**	**2019**	80	80		**80**	
Old Settlers ES - Generator	**40**	**2019**	90	90		**90**	**Cummins - Diesel; 125KW**
Old Settlers ES - Lift Station	**20**	**2019**	80	80		**80**	**2,000 gal Tank**
Old Settlers ES - Shade Structure - Main	**20**	**2012**	45	45		**45**	
Old Settlers ES - Playground - Main	**20**	**2017**	70	70		**70**	
Old Settlers ES - Shade Structure - Pre-K	**-**					**-**	
Old Settlers ES - Playground - Pre-K	**20**	**2017**	70	70		**70**	
Old Settlers ES - Perf Arts - Curtains	**20**	**2019**	80	80		**80**	
Old Settlers ES - Perf Arts - Stage Lighting/panel	**25**	**2019**	84	84		**84**	**LED**
Old Settlers ES - Flooring - Classrooms-Orig	**20**	**2019**	80	80		**80**	**VCT**
Old Settlers ES - Flooring - Classrooms - 2001 Add	**20**	**2019**	80	80		**80**	**VCT**
Old Settlers ES - Flooring - Corridors	**20**	**2019**	80	80		**80**	**VCT**
Old Settlers ES - Flooring - Library	**15**	**2019**	73	73		**73**	
Old Settlers ES - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
Old Settlers ES - Flooring - Cafeteria	**20**	**2019**	80	80		**80**	
Old Settlers ES - Flooring - Kitchen	**50**	**1994**	42	35		**39**	**Terrazzo, some cracking**
Old Settlers ES - Flooring - Gym	**20**	**2019**	80	80		**80**	**LVT**
Old Settlers ES - Plastic Laminate	**40**	**2019**	90	90		**90**	
Old Settlers ES - Doors	**20**	**2019**	80	80		**80**	
Old Settlers ES - Door Hardware	**20**	**2019**	80	80		**80**	
Old Settlers ES - Casework (Built-Ins)	**20**	**2019**	80	80		**80**	
Old Settlers ES - Restrooms - Faculty	**20**	**2019**	80	80		**80**	
Old Settlers ES - Restrooms - Student	**20**	**2019**	80	80		**80**	
Old Settlers ES - Restrooms - 2001 Addition	**20**	**2019**	80	80		**80**	
Old Settlers ES - Marquee	**30**	**1994**	3	3		**3**	**Total interior refurbishment 2021**
Old Settlers ES - Paving - Parking Lots	**50**	**1994**	42	42		**42**	**Concrete**
Old Settlers ES - Paving - Sidewalks	**40**	**1994**	28	28		**28**	**Concrete; some heaving**
Old Settlers ES - Exterior Lighting	**20**	**2019**	80	80		**80**	**LED**
Old Settlers ES - Paint - Commons	**15**	**2019**	73	73		**73**	
Old Settlers ES - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
Old Settlers ES - Paint - Library	**15**	**2019**	73	73		**73**	
Old Settlers ES - Paint - Gyms	**20**	**2019**	80	80		**80**	
Old Settlers ES - Paint - Exterior	**20**	**2019**	80	80		**80**	
Old Settlers ES - Paint - Hallways	**20**	**2019**	80	80		**80**	

Owen ES

Year Built / Age 1987 / 36

Campus Square Footage 78,776

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1987**	**28**				
Owen ES - HVAC	**20**	**2010**	35	35	6%	**37**	**RTU**
Owen ES - Controls	**20**	**2010**	35	35		**35**	**Controls = Alerton**
Owen ES - Ceiling and Lights	**20**	**2010**	35	35		**35**	
Owen ES - Roof - Flat	**20**	**2002**	-5	5	-33%	**0**	
Owen ES - Electrical Switchgear	**30**	**1987**	-20	0	0%	**-10**	**Major repair 2010**
Owen ES - Lift	**25**	**2008**	40	40		**40**	**Nat'l Wheel-O-Vator - Lift at stage**
Owen ES - Fire Safety - Fire Alarm	**20**	**2002**	-5	5	-6%	**0**	**Edwards EST 2 - Limited Parts**
Owen ES - Fire Safety - ERRS	**-**					**-**	
Owen ES - Fire Safety - Sprinkler System	**50**	**2010**	74	74	17%	**86**	
Owen ES - Food Service Boilers	**20**	**2017**	70	70		**70**	
Owen ES - Food Service Freezers	**20**	**2009**	30	30		**30**	**One unit is original and needs replacement**
Owen ES - Generator	**40**	**2010**	68	68		**68**	**Cummins - Diesel; 80 KW**
Owen ES - Shade Structure - Main	**-**					**-**	
Owen ES - Playground - Main	**20**	**2005**	10	10		**10**	**Paint fading/scratches; steps replaced 2018**
Owen ES - Shade Structure - Pre-K	**-**					**-**	
Owen ES - Playground - Pre-K	**20**	**2014**	55	55		**55**	**Minor rust and coating coming off on Pie steps; overall good condition**
Owen ES - Perf Arts - Curtains	**20**	**2005**	10	10		**10**	
Owen ES - Perf Arts - Stage Lighting/panel	**25**	**2010**	48	48		**48**	
Owen ES - Flooring - Classrooms	**20**	**2010**	35	35		**35**	**VCT**
Owen ES - Flooring - Corridors	**20**	**2010**	35	35		**35**	**VCT**
Owen ES - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet**
Owen ES - Flooring - Offices	**15**	**2010**	13	13		**13**	**Carpet / VCT**
Owen ES - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	**VCT**
Owen ES - Flooring - Kitchen	**50**	**1987**	28	28		**28**	**Terrazzo**
Owen ES - Flooring - Gym	**20**	**2010**	35	35		**35**	**VCT**
Owen ES - Plastic Laminate	**40**	**2010**	68	68		**68**	
Owen ES - Doors	**20**	**2010**	35	35		**35**	
Owen ES - Door Hardware	**20**	**2010**	35	35		**35**	
Owen ES - Casework (Built-Ins)	**20**	**1987**	-80	0		**-40**	
Owen ES - Restrooms - Faculty	**20**	**2010**	35	35		**35**	
Owen ES - Restrooms - Student	**20**	**2010**	35	35		**35**	
Owen ES - Marquee	**30**	**2010**	57	57		**57**	**Brick with metal frame**
Owen ES - Paving - Parking Lots	**50**	**1987**	28	28		**28**	**Concrete**
Owen ES - Paving - Sidewalks	**40**	**1987**	10	20		**15**	
Owen ES - Exterior Lighting	**20**	**2010**	35	35		**35**	**Pole Lights LED Bulbs 2021**
Owen ES - Paint - Commons	**15**	**2010**	13	13		**13**	
Owen ES - Paint - Cafeteria	**15**	**2010**	13	13		**13**	**Kitchen painted 2023**
Owen ES - Paint - Library	**15**	**2022**	93	93		**93**	
Owen ES - Paint - Gyms	**20**	**2010**	35	40		**38**	**Lower walls painted 2017**
Owen ES - Paint - Exterior	**20**	**2017**	70	70		**70**	**New coping; Front Awning painted 2019**
Owen ES - Paint - Hallways	**20**	**2010**	35	35		**35**	**1/2 P-Lam/ 1/2 tackable surface**

Parkway ES

Year Built / Age 1995 / 28

Campus Square Footage 75,113

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1995**	**44**				
Parkway ES - HVAC	**20**	**2020**	85	85	13%	**96**	**RTU - AAON**
Parkway ES - HVAC -Controls	**20**	**2020**	85	85		**85**	**Controls = Reliable**
Parkway ES - Ceiling and Lights	**20**	**2020**	85	85		**85**	**LED**
Parkway ES - Roof - Flat	**20**	**2020**	85	85	17%	**99**	**2 ply Mod Bit**
Parkway ES - Roof - Shingled	**20**	**2013**	50	50	17%	**50**	
Parkway ES - Electrical Switchgear	**30**	**1995**	7	7	-1%	**7**	
Parkway ES - Fire Safety - Fire Alarm	**20**	**2020**	85	85		**85**	**EST 3**
Parkway ES - Fire Safety - ERRS	**-**					**-**	
Parkway ES - Fire Safety - Sprinkler System	**50**	**1995**	44	44	17%	**52**	
Parkway ES - Food Service Boilers	**20**	**2020**	85	85		**85**	
Parkway ES - Food Service Freezers	**20**	**2020**	85	85		**85**	
Parkway ES - Generator	**40**	**2019**	90	90		**90**	**Cummins-Diesel; 60KW**
Parkway ES - Shade Structure - Main	**20**	**2006**	15	15		**15**	**Some holes in shade structure; needs replacement canopy**
Parkway ES - Playground - Main	**20**	**2015**	60	60		**60**	**bench coating is peeling; all steps replaced through warranty; ok condition**
Parkway ES - Shade Structure - Pre-K	**-**					**-**	
Parkway ES - Playground - Pre-K	**20**	**2012**	45	45		**45**	
Parkway ES - Perf Arts - Curtains	**20**	**2020**	85	85		**85**	
Parkway ES - Perf Arts - Stage Lighting/panel	**25**	**2020**	88	88		**88**	**LED**
Parkway ES - Flooring - Classrooms-VCT	**20**	**2020**	85	85		**85**	**VCT**
Parkway ES - Flooring - Corridors	**20**	**2020**	85	85		**85**	**VCT**
Parkway ES - Flooring - Library	**15**	**2020**	80	80		**80**	**Carpet/VCT**
Parkway ES - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
Parkway ES - Flooring - Cafeteria	**20**	**2020**	85	85		**85**	**VCT**
Parkway ES - Flooring - Kitchen	**50**	**2009**	72	65		**69**	**Terrazzo (some patching)**
Parkway ES - Flooring - Gym	**20**	**2020**	85	85		**85**	**LVT**
Parkway ES - Plastic Laminate	**40**	**2020**	93	93		**93**	
Parkway ES - Doors	**20**	**2020**	85	85		**85**	**Wood/FRP Alum Store**
Parkway ES - Door Hardware	**20**	**2020**	85	85		**85**	**Medeco**
Parkway ES - Casework (Built-Ins)	**20**	**2020**	85	85		**85**	**Laminate**
Parkway ES - Restrooms - Faculty	**20**	**2020**	85	85		**85**	**CMU walls, ceramic tile floors , plastic partitions**
Parkway ES - Restrooms - Student	**20**	**2020**	85	85		**85**	**floor urinals, ceramic tile floors, CMU walls, plastic partitions**
Parkway ES - Marquee	**15**	**2020**	80	80		**80**	**Digital**
Parkway ES - Paving - Parking Lots	**50**	**1995**	44	15		**30**	**Concrete, a lot of movement**
Parkway ES - Paving - Sidewalks	**40**	**1995**	30	15		**23**	**Concrete, a lot of movement**
Parkway ES - Exterior Lighting	**20**	**2018**	75	75		**75**	**LED**
Parkway ES - Paint - Commons	**15**	**2020**	80	80		**80**	**P-Lam, paint**
Parkway ES - Paint - Cafeteria	**15**	**2020**	80	80		**80**	
Parkway ES - Paint - Library	**15**	**2020**	80	80		**80**	
Parkway ES - Paint - Gyms	**20**	**2020**	85	85		**85**	
Parkway ES - Paint - Exterior	**20**	**2020**	85	85		**85**	
Parkway ES - Paint - Hallways	**20**	**2020**	85	85		**85**	

Peters Colony ES

Year Built / Age 2010 / 13

Campus Square Footage 108,560

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2010**	**74**				
Peters Colony ES - HVAC	**20**	**2010**	35	35	-1%	**35**	**CHILLER**
Peters Colony ES - HVAC - Controls	**20**	**2010**	35	35		**35**	**Controls = Alerton (control)/Automated Logic (hardware)**
Peters Colony ES - Ceiling and Lights	**20**	**2010**	35	30		**33**	**T5**
Peters Colony ES - Roof - Shingled	**20**	**2010**	35	35	-9%	**32**	
Peters Colony ES - Electrical Switchgear	**30**	**2010**	57	57	-9%	**52**	
Peters Colony ES - Elevator	**25**	**2010**	48	48	11%	**53**	**Schindler**
Peters Colony ES - Fire Safety - Fire Alarm	**20**	**2010**	35	35	17%	**41**	**Harrington**
Peters Colony ES - Fire Safety - ERRS	-					-	
Peters Colony ES - Fire Safety - Sprinkler System	**50**	**2010**	74	74	18%	**87**	
Peters Colony ES - Food Service Boilers	**20**	**2010**	35	35		**35**	
Peters Colony ES - Food Service Freezers	**20**	**2010**	35	35		**35**	
Peters Colony ES - Generator	**40**	**2010**	68	68		**68**	**Generac - Diesel; 200 KW**
Peters Colony ES - Shade Structure - Main	-					-	
Peters Colony ES - Playground - Main	**20**	**2010**	35	35		**35**	**Warranty replaced steps; paint fading; drainage repaired; added ADA rano & sidewalk into swings 2020; ok shape**
Peters Colony ES - Shade Structure - Pre-K	-					-	
Peters Colony ES - Playground - Pre-K	**20**	**2014**	55	55		**55**	
Peters Colony ES - Perf Arts - Curtains	**20**	**2010**	35	35		**35**	
Peters Colony ES - Perf Arts - Stage Lighting/panel	**25**	**2010**	48	48		**48**	
Peters Colony ES - Café/Gym - Partition Wall	**20**	**2010**	35	30		**33**	
Peters Colony ES - Flooring - Classrooms	**20**	**2010**	35	35		**35**	**VCT**
Peters Colony ES - Flooring - Corridors	**20**	**2010**	35	35		**35**	**VCT, Stair Terrazzo: 75%**
Peters Colony ES - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet**
Peters Colony ES - Flooring - Offices	**15**	**2010**	13	13		**13**	**Carpet/VCT**
Peters Colony ES - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	**VCT**
Peters Colony ES - Flooring - Kitchen	**50**	**2010**	74	65		**70**	**Terrazzo**
Peters Colony ES - Flooring - Gym	**20**	**2010**	35	35		**35**	**VCT**
Peters Colony ES - Plastic Laminate	**40**	**2010**	68	68		**68**	
Peters Colony ES - Doors	**20**	**2010**	35	35		**35**	
Peters Colony ES - Door Hardware	**20**	**2010**	35	35		**35**	
Peters Colony ES - Casework (Built-Ins)	**20**	**2010**	35	35		**35**	
Peters Colony ES - Restrooms - Faculty	**20**	**2010**	35	35		**35**	
Peters Colony ES - Restrooms - Student	**20**	**2010**	35	35		**35**	
Peters Colony ES - Marquee	**30**	**2010**	57	57		**57**	
Peters Colony ES - Paving - Parking Lots	**50**	**2010**	74	74		**74**	
Peters Colony ES - Paving - Sidewalks	**40**	**2010**	68	68		**68**	
Peters Colony ES - Exterior Lighting	**20**	**2010**	35	20		**28**	**Issues w/timing; Pole Lights & wall packs LED**
Peters Colony ES - Paint - Commons	**15**	**2010**	13	13		**13**	
Peters Colony ES - Paint - Cafeteria	**15**	**2010**	13	13		**13**	**Kitchen-tile walls,**
Peters Colony ES - Paint - Library	**15**	**2010**	13	13		**13**	
Peters Colony ES - Paint - Gyms	**20**	**2010**	35	35		**35**	
Peters Colony ES - Paint - Exterior	**20**	**2010**	35	35		**35**	
Peters Colony ES - Paint - Hallways	**20**	**2010**	35	35		**35**	**P-Lam, some tackboard**

Polser ES STEM Academy

Year Built / Age 1995 / 28

Campus Square Footage 73,324

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1995**	**44**				
Polser ES - HVAC	**20**	**2018**	75	75	2%	**76**	**AAON units**
Polser ES - HVAC - Controls	**20**	**2018**	75	75		**75**	**Controls = Alerton**
Polser ES - Ceiling and Lights	**20**	**2018**	75	75		**75**	**LED**
Polser ES - Roof - Flat	**20**	**2018**	75	75		**75**	
Polser ES - Roof - Shingled	**20**	**2013**	50	45	-32%	**32**	
Polser ES - Electrical Switchgear	**30**	**1995**	7	7	6%	**7**	
Polser ES - Fire Safety - Fire Alarm	**20**	**2018**	75	75		**75**	**EST 3 Voice Evac**
Polser ES - Fire Safety - ERRS	**-**					**-**	
Polser ES - Fire Safety - Sprinkler System	**50**	**1995**	44	44	-12%	**39**	
Polser ES - Food Service Boilers	**20**	**2009**	30	30		**30**	
Polser ES - Food Service Freezers	**20**	**2018**	75	75		**75**	
Polser ES - Generator	**40**	**2018**	88	88		**88**	**Cummins - Diesel; 40KW**
Polser ES - Shade Structure - Main	**-**					**-**	
Polser ES - Playground - Main	**20**	**2013**	50	50		**50**	**Slope issues repaired 2018**
Polser ES - Shade Structure - Pre-K	**-**					**-**	
Polser ES - Playground - Pre-K	**20**	**2013**	50	50		**50**	
Polser ES - Perf Arts - Curtains	**20**	**2018**	75	75		**75**	
Polser ES - Perf Arts - Stage Lghtng/panel	**25**	**2018**	80	80		**80**	
Polser ES - Flooring - Classrooms	**20**	**2019**	80	80		**80**	**VCT**
Polser ES - Flooring - Corridors	**20**	**2012**	45	45		**45**	**VCT**
Polser ES - Flooring - Library	**15**	**2018**	67	67		**67**	**Half Carpet/VCT**
Polser ES - Flooring - Offices	**15**	**2019**	73	73		**73**	**Carpet**
Polser ES - Flooring - Cafeteria	**20**	**2011**	40	40		**40**	**VCT**
Polser ES - Flooring - Kitchen	**50**	**1995**	44	40		**42**	**Terrazzo**
Polser ES - Flooring - Gym	**20**	**2019**	80	80		**80**	**LVT**
Polser ES - Plastic Laminate	**40**	**2019**	90	90		**90**	
Polser ES - Doors	**20**	**2019**	80	80		**80**	
Polser ES - Door Hardware	**20**	**2019**	80	80		**80**	
Polser ES - Casework (Built-Ins)	**20**	**2019**	80	80		**80**	
Polser ES - Restrooms - Faculty	**20**	**2019**	80	80		**80**	
Polser ES - Restrooms - Student	**20**	**2019**	80	80		**80**	
Polser ES - Marquee	**15**	**2021**	87	87		**87**	**Updated STEM; scrolling digital**
Polser ES - Paving - Parking Lots	**50**	**1995**	44	44		**44**	**Concrete**
Polser ES - Paving - Sidewalks	**40**	**1995**	30	30		**30**	**Concrete**
Polser ES - Exterior Lighting	**20**	**2019**	80	80		**80**	**LED**
Polser ES - Paint - Commons	**15**	**2019**	73	73		**73**	
Polser ES - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
Polser ES - Paint - Library	**15**	**2019**	73	73		**73**	
Polser ES - Paint - Gyms	**20**	**2019**	80	80		**80**	
Polser ES - Paint - Exterior	**20**	**2019**	80	80		**80**	
Polser ES - Paint - Hallways	**20**	**2019**	80	80		**80**	

Prairie Trail ES

Year Built / Age 1995 / 28

Campus Square Footage 84,221

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1995**	**44**				
Prairie Trail ES - HVAC-Original	**20**	**2021**	90	90	16%	**100**	**AAON RTU**
Prairie Trail ES - HVAC-2007 Addition	**20**	**2021**	90	90	16%	**100**	**AAON RTU**
Prairie Trail ES - HVAC- Controls	**20**	**2021**	90	90		**90**	**Controls = Enviromatics**
Prairie Trail ES - Ceiling and Lights-Original	**20**	**2021**	90	90		**90**	**LED**
Prairie Trail ES - Ceiling and Lights-2007 Addition	**20**	**2021**	90	90		**90**	**LED**
Prairie Trail ES - Roof - Flat-Original	**20**	**2021**	90	90	12%	**100**	
Prairie Trail ES - Roof - Flat-2007 Addition	**20**	**2007**	20	20	12%	**22**	
Prairie Trail ES - Roof - Shingled	**20**	**2013**	50	0		**25**	**Nail issue**
Prairie Trail ES - Electrical Switchgear	**30**	**1995**	7	25	-14%	**14**	**Square D**
Prairie Trail ES - Fire Safety - Fire Alarm	**20**	**2020**	85	85		**85**	**EST 3 Voice Evac**
Prairie Trail ES - Fire Safety - ERRS		**2020**					**Tracking only**
Prairie Trail ES - Fire Safety - Sprinkler System	**50**	**1995**	44	44	-50%	**22**	
Prairie Trail ES - Food Service Boilers	**20**	**2021**	90	90		**90**	**Tank**
Prairie Trail ES - Food Service Freezers	**20**	**2021**	90	90		**90**	
Prairie Trail ES - Generator	**40**	**2021**	95	95		**95**	**Kohler - Diesel; 42 KW**
Prairie Trail ES - Shade Structure - Main	**20**	**2005**	10	10		**10**	
Prairie Trail ES - Playground - Main	**20**	**2013**	50	50		**50**	**Miracle; in ok shape**
Prairie Trail ES - Shade Structure - Pre-K	**-**					**-**	
Prairie Trail ES - Playground - Pre-K	**20**	**2013**	50	50		**50**	**Miracle; in good shape**
Prairie Trail ES - Perf Arts - Curtains	**20**	**2021**	90	90		**90**	
Prairie Trail ES - Perf Arts - Stage Lghtng/panel	**25**	**2020**	88	88		**88**	**LED**
Prairie Trail ES - Flooring - Classrooms	**20**	**2013**	50	50		**50**	**LVT ; Art Rm floor replaced LVT 2021**
Prairie Trail ES - Flooring - Corridors	**20**	**2021**	90	90		**90**	**LVT**
Prairie Trail ES - Flooring - Library	**20**	**2021**	90	90		**90**	**LVT/Carpet**
Prairie Trail ES - Flooring - Offices	**20**	**2013**	50	50		**50**	**LVT**
Prairie Trail ES - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**LVT**
Prairie Trail ES - Flooring - Kitchen	**50**	**1995**	44	44		**44**	**Terrazzo**
Prairie Trail ES - Flooring - Gym	**20**	**2013**	50	50		**50**	**LVT**
Prairie Trail ES - Plastic Laminate	**40**	**2021**	95	95		**95**	
Prairie Trail ES - Doors	**20**	**2021**	90	90		**90**	
Prairie Trail ES - Door Hardware	**20**	**2021**	90	90		**90**	
Prairie Trail ES - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	
Prairie Trail ES - Restrooms - Faculty	**20**	**2021**	90	90		**90**	**Ceramic**
Prairie Trail ES - Restrooms - Student	**20**	**2021**	90	90		**90**	**Ceramic, CMU walls**
Prairie Trail ES - Restrooms - 2007 Addition	**20**	**2021**	90	90		**90**	
Prairie Trail ES - Marquee	**30**	**1995**	7	7		**7**	
Prairie Trail ES - Paving - Parking Lots	**50**	**1995**	44	44		**44**	**Concrete**
Prairie Trail ES - Paving - Sidewalks	**40**	**1995**	30	30		**30**	**Concrete**
Prairie Trail ES - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
Prairie Trail ES - Paint - Commons	**15**	**2021**	87	87		**87**	
Prairie Trail ES - Paint - Cafeteria	**15**	**2021**	87	87		**87**	
Prairie Trail ES - Paint - Library	**15**	**2021**	87	87		**87**	
Prairie Trail ES - Paint - Gyms	**20**	**2021**	90	90		**90**	
Prairie Trail ES - Paint - Exterior	**20**	**2021**	90	90		**90**	
Prairie Trail ES - Paint - Hallways	**20**	**2021**	90	90		**90**	

Rockbrook ES

Year Built / Age 2003 / 20

Campus Square Footage 86,122

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2003**	**60**				
Rockbrook ES - HVAC - Original	**20**	**2003**	0	5	7%	**3**	**RTU**
Rockbrook ES - HVAC - 2007 Addition	**20**	**2007**	20	15	7%	**19**	**RTU**
Rockbrook ES - HVAC - Controls	**20**	**2003**	0	5		**3**	**2003 & 2007 Control = I/net**
Rockbrook ES - Ceiling and Lights - Original	**20**	**2003**	0	5		**3**	
Rockbrook ES - Ceiling and Lights - 2007 Addition	**20**	**2007**	20	15		**18**	
Rockbrook ES - Roof - Flat Original	**20**	**2003**	0	5	12%	**3**	
Rockbrook ES - Roof - Flat 2007 Addition	**20**	**2007**	20	15	12%	**20**	
Rockbrook ES - Electrical Switchgear	**30**	**2003**	33	33	-8%	**30**	
Rockbrook ES - Fire Safety - Fire Alarm	**20**	**2003**	0	5	-6%	**2**	**Edwards EST 2 - Limited Parts**
Rockbrook ES - Fire Safety - ERRS	**-**					**-**	
Rockbrook ES - Fire Safety - Sprinkler System	**50**	**2003**	60	60	2%	**61**	
Rockbrook ES - Food Service Boilers	**20**	**2003**	0	5		**3**	
Rockbrook ES - Food Service Freezers	**20**	**2003**	0	5		**3**	
Rockbrook ES - Generator	**-**					**-**	
Rockbrook ES - Shade Structure - Main	**-**					**-**	
Rockbrook ES - Playground - Main	**20**	**2003**	0	5		**3**	**Stairs replaced 2018 under warranty; Slide replaced 2020**
Rockbrook ES - Shade Structure - Pre-K	**20**	**2018**	75	75		**75**	
Rockbrook ES - Playground - Pre-K	**20**	**2014**	55	55		**55**	
Rockbrook ES - Perf Arts - Curtains	**20**	**2003**	0	5		**3**	
Rockbrook ES - Perf Arts - Stage Lghtng/panel	**25**	**2003**	20	10		**15**	
Rockbrook ES - Flooring - Classrooms - VCT	**20**	**2021**	90	90		**90**	**VCT**
Rockbrook ES - Flooring - Corridors	**20**	**2003**	0	5		**3**	**VCT**
Rockbrook ES - Flooring - Library	**20**	**2021**	90	90		**90**	**LVT/Carpet**
Rockbrook ES - Flooring - Offices	**15**	**2012**	27	27		**27**	**VCT**
Rockbrook ES - Flooring - Cafeteria	**20**	**2003**	0	5		**3**	**VCT**
Rockbrook ES - Flooring - Kitchen	**50**	**2003**	60	55		**58**	**Terrazzo**
Rockbrook ES - Flooring - Gym	**20**	**2003**	0	5		**3**	**VCT**
Rockbrook ES - Plastic Laminate	**40**	**2003**	50	50		**50**	
Rockbrook ES - Doors	**20**	**2003**	0	5		**3**	
Rockbrook ES - Door Hardware	**20**	**2003**	0	5		**3**	
Rockbrook ES - Casework (Built-Ins)	**20**	**2003**	0	5		**3**	
Rockbrook ES - Restrooms - Faculty	**20**	**2003**	0	5		**3**	**Ceramic floor / wall**
Rockbrook ES - Restrooms - Student	**20**	**2003**	0	5		**3**	**Ceramic floor / wall, laminate partitions, boys: some swelling.**
Rockbrook ES - Restrooms - 2007 Addition	**20**	**2007**	20	20		**20**	**plastic partitions - Restrooms by gym & 2nd grade Hall have new Partitions in 2017**
Rockbrook ES - Marquee	**30**	**2003**	33	33		**33**	
Rockbrook ES - Paving - Parking Lots	**50**	**2003**	60	60		**60**	**Concrete**
Rockbrook ES - Paving - Sidewalks	**40**	**2003**	50	50		**50**	**Concrete, some swelling**
Rockbrook ES - Exterior Lighting	**20**	**2003**	0	5		**3**	
Rockbrook ES - Paint - Commons	**15**	**2013**	33	33		**33**	**Office areas painted 2019**
Rockbrook ES - Paint - Cafeteria	**15**	**2013**	33	33		**33**	
Rockbrook ES - Paint - Library	**15**	**2019**	73	73		**73**	
Rockbrook ES - Paint - Gyms	**20**	**2003**	0	5		**3**	**Bench: carpet; Lower walls painted 2019**
Rockbrook ES - Paint - Exterior	**20**	**2003**	0	5		**3**	**Fencing coating needs review**
Rockbrook ES - Paint - Hallways	**20**	**2003**	0	5		**3**	**P-LAM walls**

Southridge ES

Year Built / Age 1999 / 24

Campus Square Footage 74,375

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1999**	**52**				
Southridge ES - HVAC	**20**	**2022**	95	95	20%	**100**	**RTU**
Southridge ES - HVAC - Controls	**20**	**2022**	95	95		**95**	**Control = Reliable**
Southridge ES - Ceiling and Lights	**20**	**2022**	95	95		**95**	
Southridge ES - Roof - Flat	**20**	**2022**	95	95	20%	**100**	
Southridge ES - Electrical Switchgear	**30**	**1999**	20	20	7%	**21**	
Southridge ES - Fire Safety - Fire Alarm	**20**	**2022**	95	95		**95**	**EST 3 Voice Evac**
Southridge ES - Fire Safety - ERRS	**-**					**-**	**Based on Testing, it is not needed**
Southridge ES - Fire Safety - Sprinkler System	**50**	**1999**	52	52	18%	**61**	
Southridge ES - Food Service Boilers	**20**	**2014**	55	55		**55**	
Southridge ES - Food Service Freezers	**20**	**2022**	95	95		**95**	
Southridge ES - Generator	**40**	**2022**	98	98		**98**	**Generac - Diesel; 35-80 KW**
Southridge ES - Shade Structure - Main	**-**					**-**	
Southridge ES - Playground - Main	**20**	**2015**	60	60		**60**	**Little Tikes,High traffic; steps replaced in 2018**
Southridge ES - Shade Structure - Pre-K	**-**					**-**	
Southridge ES - Playground - Pre-K	**20**	**2015**	60	60		**60**	**steps replaced in 2018; some fading; slide replaced 2020**
Southridge ES - Perf Arts - Curtains	**20**	**2022**	95	95		**95**	
Southridge ES - Perf Arts - Stage Lghtng/panel	**25**	**2022**	96	96		**96**	**LED**
Southridge ES - Flooring - Classrooms	**20**	**2022**	95	95		**95**	**VCT -**
Southridge ES - Flooring - Corridors	**20**	**2022**	95	95		**95**	**VCT -**
Southridge ES - Flooring - Library	**15**	**2022**	93	93		**93**	**Carpet squares/VCT**
Southridge ES - Flooring - Offices	**15**	**2022**	93	93		**93**	**Carpet; Principal LVT 2018**
Southridge ES - Flooring - Cafeteria	**20**	**2022**	95	95		**95**	**VCT -**
Southridge ES - Flooring - Kitchen	**50**	**1999**	52	45		**49**	**Terrazzo**
Southridge ES - Flooring - Gym	**20**	**2022**	95	95		**95**	**VCT -**
Southridge ES - Plastic Laminate	**40**	**2022**	98	98		**98**	
Southridge ES - Doors	**20**	**2022**	95	95		**95**	
Southridge ES - Door Hardware	**20**	**2022**	95	95		**95**	
Southridge ES - Casework (Built-Ins)	**20**	**2022**	95	95		**95**	
Southridge ES - Restrooms - Faculty	**20**	**2022**	95	95		**95**	
Southridge ES - Restrooms - Student	**20**	**2022**	95	95		**95**	
Southridge ES - Marquee	**30**	**2022**	97	97		**97**	**Digital**
Southridge ES - Paving - Parking Lots	**50**	**1999**	52	52		**52**	
Southridge ES - Paving - Sidewalks	**40**	**1999**	40	40		**40**	
Southridge ES - Exterior Lighting	**20**	**2022**	95	95		**95**	**LED**
Southridge ES - Paint - Commons	**15**	**2022**	93	93		**93**	
Southridge ES - Paint - Cafeteria	**15**	**2022**	93	93		**93**	
Southridge ES - Paint - Gyms	**15**	**2020**	80	80		**80**	
Southridge ES - Paint - Library	**20**	**2022**	95	95		**95**	
Southridge ES - Paint - Exterior	**20**	**2022**	95	95		**95**	
Southridge ES - Paint - Hallways	**20**	**2022**	95	95		**95**	

Timber Creek ES

Year Built / Age 1978 / 45

Campus Square Footage 63,532

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1978**	**10**				
Timber Creek ES - HVAC-Original	**20**	**2020**	85	85	6%	**90**	**RTU**
Timber Creek ES - HVAC-1987 Addition	**20**	**2012**	45	45	6%	**48**	**RTU**
Timber Creek ES - HVAC-Controls	**20**	**2019**	80	80		**80**	**Control = Reliable**
Timber Creek ES - Ceiling and Lights-Original	**20**	**2020**	85	85		**85**	**LED**
Timber Creek ES - Ceiling and Lights-1987 Addition	**20**	**2020**	85	85		**85**	**LED**
Timber Creek ES - Roof - Flat Original Bldg	**20**	**2004**	5	5	-36%	**3**	
Timber Creek ES - Roof - Flat 1987 Addition	**20**	**2012**	45	45	-36%	**45**	
Timber Creek ES - Electrical Switchgear	**30**	**2020**	90	90	7%	**96**	**Square D; Cutler Hammer**
Timber Creek ES - Fire Safety - Fire Alarm	**20**	**2020**	85	85	15%	**98**	**EST 3 Voice Evac**
Timber Creek ES - Fire Safety - ERRS	**-**					**-**	
Timber Creek ES - Fire Safety - Sprinkler System	**50**	**2020**	94	94	20%	**100**	
Timber Creek ES - Food Service Boilers	**20**	**2020**	85	85		**85**	
Timber Creek ES - Food Service Freezers	**20**	**2015**	60	60		**60**	
Timber Creek ES - Generator	**40**	**2019**	90	90		**90**	**Cummins - Diesel; 80 KW**
Timber Creek ES - Shade Structure - Main	**-**					**-**	
Timber Creek ES - Playground - Main	**20**	**2012**	45	45		**45**	**Little Tikes; steps replaced 2018; poor drainage off parking lot**
Timber Creek ES - Shade Structure - Pre-K	**-**					**-**	
Timber Creek ES - Playground - Pre-K	**20**	**2012**	45	45		**45**	**Little Tikes; ramp added 2018**
Timber Creek ES - Perf Arts - Curtains	**20**	**2020**	85	85		**85**	
Timber Creek ES - Perf Arts - Stage Lghtng/panel	**25**	**2020**	88	88		**88**	**LED**
Timber Creek ES - Flooring - Classrooms	**20**	**2020**	85	85		**85**	**VCT**
Timber Creek ES - Flooring - Corridors	**20**	**2020**	85	85		**85**	**VCT**
Timber Creek ES - Flooring - Library	**15**	**2020**	80	80		**80**	**Carpet / VCT**
Timber Creek ES - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
Timber Creek ES - Flooring - Cafeteria	**20**	**2020**	85	85		**85**	**VCT**
Timber Creek ES - Flooring - Kitchen	**30**	**2020**	90	90		**90**	**Ceramic**
Timber Creek ES - Flooring - Gym	**20**	**2020**	85	85		**85**	**VCT**
Timber Creek ES - Plastic Laminate	**30**	**2020**	90	90		**90**	
Timber Creek ES - Doors	**20**	**2020**	85	85		**85**	
Timber Creek ES - Door Hardware	**20**	**2020**	85	85		**85**	
Timber Creek ES - Casework (Built-Ins)	**20**	**2020**	85	85		**85**	
Timber Creek ES - Restrooms - Faculty	**20**	**2020**	85	85		**85**	**Ceramic**
Timber Creek ES - Restrooms - Student	**20**	**2020**	85	85		**85**	**Ceramic**
Timber Creek ES - Restrooms - 1987 Addition	**20**	**2020**	85	85		**85**	
Timber Creek ES - Marquee	**30**	**1990**	-10	3		**-4**	**Not lit; 2022 refresh**
Timber Creek ES - Concrete Paving - Parking Lots	**50**	**1978**	10	15		**13**	
Timber Creek ES - Asphalt Paving - Parking Lots	**20**	**2005**	10	15		**13**	**South lot**
Timber Creek ES - Paving - Sidewalks	**40**	**1978**		30		**30**	**Concrete - Repairing as needed**
Timber Creek ES - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
Timber Creek ES - Paint - Commons	**15**	**2020**	80	80		**80**	
Timber Creek ES - Paint - Cafeteria	**15**	**2020**	80	80		**80**	
Timber Creek ES - Paint - Library	**15**	**2020**	80	80		**80**	
Timber Creek ES - Paint - Gyms	**20**	**2020**	85	85		**85**	
Timber Creek ES - Paint - Exterior	**20**	**2020**	85	85		**85**	
Timber Creek ES - Paint - Hallways	**20**	**2020**	85	85		**85**	

Valley Ridge ES STEM Academy

Year Built / Age 1996 / 27

Campus Square Footage 83,844

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1996**	**46**				
Valley Ridge ES - HVAC - Original	**20**	**2019**	80	80	12%	**90**	**RTU - Aaon**
Valley Ridge ES - HVAC - 2007 Addition	**20**	**2007**	20	20	12%	**22**	**RTU**
Valley Ridge ES - HVAC - Controls	**20**	**2019**	80	80		**80**	**Reliable**
Valley Ridge ES - Ceiling and Lights - Original	**20**	**2019**	80	80		**80**	**LED**
Valley Ridge ES - Ceiling and Lights - 2007 Addition	**20**	**2007**	20	20		**20**	
Valley Ridge ES - Roof - Flat - Original	**20**	**2018**	75	75	1%	**76**	**2016 hail claim insurance replacement**
Valley Ridge ES - Roof - Flat - 2007 Addition	**20**	**2018**	75	75	1%	**76**	**2016 hail claim insurance replacement**
Valley Ridge ES - Roof - Shingled	**20**	**2018**	75	75	1%	**76**	**2016 hail claim insurance replacement**
Valley Ridge ES - Electrical Switchgear	**30**	**1996**	10	15	4%	**13**	
Valley Ridge ES - Fire Safety - Fire Alarm	**20**	**2019**	80	80	-19%	**65**	**EST 3 Voice Evac**
Valley Ridge ES - Fire Safety - ERRS		**2019**				**-**	**Tracking only**
Valley Ridge ES - Fire Safety - Sprinkler System	**50**	**1996**	46	46	9%	**50**	
Valley Ridge ES - Food Service Boilers	**20**	**2009**	30	30		**30**	
Valley Ridge ES - Food Service Freezers	**20**	**2019**	80	80		**80**	
Valley Ridge ES - Generator	**40**	**2019**	90	90		**90**	**Generac - Diesel; 35-80 KW**
Valley Ridge ES - Shade Structure - Main	**20**	**2016**	65	65		**65**	
Valley Ridge ES - Playground - Main	**20**	**2018**	75	75		**75**	**Voltra spinner 2018**
Valley Ridge ES - Shade Structure - Pre-K	**-**					**-**	
Valley Ridge ES - Playground - Pre-K	**20**	**2018**	75	75		**75**	
Valley Ridge ES - Perf Arts - Curtains	**20**	**2008**	25	25		**25**	
Valley Ridge ES - Perf Arts - Stage Lghtng/panel	**25**	**2019**	84	84		**84**	**LED**
Valley Ridge ES - Flooring - Classroom - VCT	**20**	**2019**	80	80		**80**	
Valley Ridge ES - Flooring - Classrooms-2007 Add	**15**	**2007**	-7	5		**-1**	
Valley Ridge ES - Flooring - Corridors	**20**	**2019**	80	80		**80**	
Valley Ridge ES - Flooring - Library	**20**	**2019**	80	80		**80**	**VCT**
Valley Ridge ES - Flooring - Offices	**15**	**2019**	73	73		**73**	
Valley Ridge ES - Flooring - Cafeteria	**20**	**2019**	80	80		**80**	
Valley Ridge ES - Flooring - Kitchen	**50**	**1996**	46	46		**46**	**Terrazzo**
Valley Ridge ES - Flooring - Gym	**20**	**2019**	80	80		**80**	**LVT**
Valley Ridge ES - Plastic Laminate	**40**	**1996**	33	33		**33**	**some panels replaced in 2019**
Valley Ridge ES - Doors	**20**	**2019**	80	80		**80**	**Wood Interior**
Valley Ridge ES - Door Hardware	**20**	**2019**	80	80		**80**	**Medeco**
Valley Ridge ES - Casework (Built-Ins)	**20**	**2019**	80	80		**80**	**Laminate Except 2007 wing**
Valley Ridge ES - Restrooms - Faculty	**20**	**2019**	80	80		**80**	**Ceramic floor / walls, drywall to ceiling, plastic partitions**
Valley Ridge ES - Restrooms - Student	**20**	**2019**	80	80		**80**	**Ceramic floor / walls, laminate partitions, floor urinals. Plastic partitions**
Valley Ridge ES - Restrooms - 2007 Addition	**20**	**2007**	20	15		**18**	
Valley Ridge ES - Marquee	**15**	**2020**	80	80		**80**	**LED; Digital**
Valley Ridge ES - Paving - Parking Lots	**50**	**1996**	46	46		**46**	**Concrete**
Valley Ridge ES - Paving - Sidewalks	**40**	**1996**	33	33		**33**	**Concrete**
Valley Ridge ES - Exterior Lighting	**20**	**2019**	80	80		**80**	**LED**
Valley Ridge ES - Paint - Commons	**15**	**2019**	73	73		**73**	
Valley Ridge ES - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
Valley Ridge ES - Paint - Library	**15**	**2019**	73	73		**73**	
Valley Ridge ES - Paint - Gyms	**20**	**2019**	80	80		**80**	
Valley Ridge ES - Paint - Exterior	**20**	**2017**	70	70		**70**	**painted 2017**
Valley Ridge ES - Paint - Hallways	**20**	**2019**	80	80		**80**	

Vickery ES

Year Built / Age 2003 / 20

Campus Square Footage 85,832

Current Year 2023

Storm Shelter = 2019 Addition

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2003**	**60**				
Vickery ES - HVAC	**20**	**2003**	0	5	1%	**3**	**RTU**
Vickery ES - HVAC - 2019 Addition	**20**	**2019**	80	80		**80**	**Controls = Alerton**
Vickery ES - HVAC - Controls	**20**	**2003**	0	5		**3**	**Controls = I/net**
Vickery ES - Ceiling and Lights	**20**	**2003**	0	5		**3**	
Vickery ES - Ceiling and Lights - 2019 Addition	**20**	**2019**	80	80		**80**	**LED**
Vickery ES - Roof - Flat	**20**	**2003**	0	5	-2%	**2**	
Vickery ES - Roof - Flat - 2019 Addition	**20**	**2019**	80	80	-2%	**78**	**2 Ply Mod Bit**
Vickery ES - Electrical Switchgear	**30**	**2003**	33	33	5%	**35**	
Vickery ES - Fire Safety - Fire Alarm	**20**	**2003**	0	5	-17%	**2**	**Edwards EST 3 - 2019; voice evac**
Vickery ES - Fire Safety - ERRS		**2019**				**-**	**Tracking only**
Vickery ES - Fire Safety - Sprinkler System	**50**	**2003**	60	60	7%	**64**	
Vickery ES - Storm Shelter - 2019 Addition	**50**	**2019**	92	92		**92**	
Vickery ES - Food Service Boilers	**20**	**2014**	55	55		**55**	
Vickery ES - Food Service Freezers	**20**	**2003**	0	5		**3**	
Vickery ES - Inverter 2019 Addition	**10**	**2019**	60	60		**60**	
Vickery ES - Inverter Batteries 2019 Addition	**5**	**2019**	20	20		**20**	
Vickery ES - Shade Structure - Main	**-**					**-**	
Vickery ES - Playground - Main	**20**	**2003**	0	5		**3**	**Cracks on ladder and walkway, steps replaced 2018; Fair Shape**
Vickery ES - Shade Structure - Pre-K	**-**					**-**	
Vickery ES - Playground - Pre-K	**-**					**-**	
Vickery ES - Perf Arts - Curtains	**20**	**2003**	0	5		**3**	
Vickery ES - Perf Arts - Stage Lghtng/panel	**25**	**2003**	20	20		**20**	
Vickery ES - Flooring - Classrooms - VCT	**20**	**2021**	90	90		**90**	**VCT**
Vickery ES - Flooring - Classrooms - 2019 Addition - VCT	**20**	**2019**	80	15		**48**	**VCT; issues with the glue; warranty issue**
Vickery ES - Flooring - Corridors	**20**	**2003**	0	5		**3**	**VCT**
Vickery ES - Flooring - Library	**15**	**2021**	87	87		**87**	**LVT/Carpet**
Vickery ES - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet / VCT**
Vickery ES - Flooring - Cafeteria	**20**	**2013**	50	50		**50**	**VCT**
Vickery ES - Flooring - Kitchen	**50**	**2003**	60	45		**53**	**Terrazzo**
Vickery ES - Flooring - Gym	**20**	**2013**	50	50		**50**	**VCT**
Vickery ES - Plastic Laminate	**40**	**2003**	50	50		**50**	
Vickery ES - Doors	**20**	**2003**	0	5		**3**	**Golden Oak**
Vickery ES - Door Hardware	**20**	**2003**	0	5		**3**	
Vickery ES - Casework (Built-Ins)	**20**	**2003**	0	5		**3**	**light grey/Laminate**
Vickery ES - Restrooms - Faculty	**20**	**2003**	0	5		**3**	**Ceramic tile floor, walls.**
Vickery ES - Restrooms - Student	**20**	**2003**	0	5		**3**	**Ceramic tile floor, walls. Plastic partitions**
Vickery ES - Restrooms - 2019 Addition	**20**	**2019**	80	80		**80**	**Plastic partitions**
Vickery ES - Marquee	**30**	**2003**	33	33		**33**	
Vickery ES - Paving - Parking Lots	**50**	**2003**	60	60		**60**	**Concrete**
Vickery ES - Paving - Sidewalks	**40**	**2003**	50	50		**50**	**Concrete**
Vickery ES - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
Vickery ES - Paint - Commons	**15**	**2003**	-33	0		**-17**	**Maintained & Painted as needed 2017**
Vickery ES - Paint - Cafeteria	**15**	**2003**	-33	0		**-17**	**Maintained & Painted as needed 2017**
Vickery ES - Paint - Library	**15**	**2016**	53	53		**53**	**Maintained & Painted as needed 2017**
Vickery ES - Paint - Gyms	**20**	**2003**	0	5		**3**	**Painted Lower walls 2017**
Vickery ES - Paint - Exterior	**20**	**2003**	0	5		**3**	
Vickery ES - Paint - Hallways	**20**	**2003**	0	5		**3**	**P-LAM, CMU, drywall; Touched up 2017**

Wellington ES

Year Built / Age 1998 / 25

Campus Square Footage 86,778

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1998**	**50**				
Wellington ES - HVAC - Original	**20**	**2022**	95	95	19%	**100**	**AAON RTU**
Wellington ES - HVAC - 2005 Addition	**20**	**2022**	95	95	19%	**100**	**AAON RTU**
Wellington ES - HVAC - Controls	**20**	**2022**	95	95		**95**	**Controls = Reliable**
Wellington ES - Ceiling and Lights - Original	**20**	**2022**	95	95		**95**	**LED Douglas**
Wellington ES - Ceiling and Lights - 2005 Addition	**20**	**2022**	95	95		**95**	**LED Douglas**
Wellington ES - Roof - Flat - Original	**20**	**2022**	95	95	20%	**100**	
Wellington ES - Roof - Flat - 2005 Addition	**20**	**2022**	95	95	20%	**100**	
Wellington ES - Electrical Switchgear	**30**	**1998**	17	20	1%	**19**	
Wellington ES - Fire Safety - Fire Alarm	**20**	**2022**	95	95		**95**	**Edwards EST 3 Voice Evac**
Wellington ES - Fire Safety - ERRS	**-**					**-**	
Wellington ES - Fire Safety - Sprinkler System	**50**	**1998**	50	50	11%	**56**	
Wellington ES - Food Service Boilers	**20**	**2022**	95	95		**95**	**Tankless**
Wellington ES - Food Service Freezers	**20**	**2022**	95	95		**95**	
Wellington ES - Generator	**40**	**2022**	98	98		**98**	**Cummins-Diesel; 50 KW**
Wellington ES - Shade Structure - Main	**20**	**2009**	30	30		**30**	
Wellington ES - Playground - Main	**20**	**2022**	95	95		**95**	
Wellington ES - Shade Structure - Pre-K	**-**					**-**	
Wellington ES - Playground - Pre-K	**20**	**2006**	15	15		**15**	**Little Tikes; Pour & Play is cracking**
Wellington ES - Perf Arts - Curtains	**20**	**2022**	95	95		**95**	
Wellington ES - Perf Arts - Stage Lghtng/panel	**25**	**2022**	96	96		**96**	
Wellington ES - Flooring - Classrooms - VCT	**15**	**2022**	93	93		**93**	**VCT**
Wellington ES - Flooring - Classrooms - VCT	**20**	**2022**	95	95		**95**	**VCT**
Wellington ES - Flooring - Corridors	**20**	**2022**	95	95		**95**	**VCT**
Wellington ES - Flooring - Library	**15**	**2022**	93	93		**93**	**Carpet**
Wellington ES - Flooring - Offices	**20**	**2022**	95	95		**95**	**VCT/ Carpet Squares**
Wellington ES - Flooring - Cafeteria	**20**	**2022**	95	95		**95**	**VCT**
Wellington ES - Flooring - Kitchen	**50**	**1998**	50	50		**50**	**Terrazzo**
Wellington ES - Flooring - Gym	**20**	**2022**	95	95		**95**	**VCT**
Wellington ES - Plastic Laminate	**40**	**2022**	98	98		**98**	
Wellington ES - Doors	**20**	**2022**	95	95		**95**	
Wellington ES - Door Hardware	**20**	**2022**	95	95		**95**	
Wellington ES - Casework (Built-Ins)	**20**	**2022**	95	95		**95**	
Wellington ES - Restrooms - Faculty	**20**	**2022**	95	95		**95**	
Wellington ES - Restrooms - Student	**20**	**2022**	95	95		**95**	
Wellington ES - Restrooms - 2005 Addition	**20**	**2022**	95	95		**95**	
Wellington ES - Marquee	**30**	**1998**	17	10		**13**	**Needs work**
Wellington ES - Paving - Parking Lots	**50**	**1998**	50	50		**50**	**Concrete**
Wellington ES - Paving - Sidewalks	**40**	**1998**	38	38		**38**	**Concrete**
Wellington ES - Exterior Lighting	**20**	**2022**	95	95		**95**	
Wellington ES - Paint - Commons	**15**	**2022**	93	93		**93**	
Wellington ES - Paint - Cafeteria	**15**	**2022**	93	93		**93**	
Wellington ES - Paint - Library	**15**	**2022**	93	93		**93**	
Wellington ES - Paint - Gyms	**20**	**2022**	95	95		**95**	
Wellington ES - Paint - Exterior	**20**	**2017**	70	70		**70**	
Wellington ES - Paint - Hallways	**20**	**2022**	95	95		**95**	

ASSESSMENT SUMMARY
MIDDLE SCHOOLS

Current Year 2023

	ARBOR CREEK	BRIARHILL	CREEK VALLEY	DELAY	DOWNING	DURHAM	FORESTWOOD	GRIFFIN	HEDRICK	HUFFINES	KILLIAN	LAKEVIEW	LAMAR	MCKAMY	SHADOW RIDGE
YEAR BUILT	1994	1995	2001	1977	2002	2002	1994	2015	2020	1997	2007	1989	1987	1997	2005
Age	29	28	22	46	21	21	29	8	3	26	16	34	36	26	18
Foundation	-	-	-	-	-	-	-	-	94	-	-	-	-	-	-
HVAC - Original	42	52	-2	38	0	0	43	66	96	66	21	17	31	60	7
HVAC - Additions	21	24	26	-	-	24	27	-	-	-	-	25	-	26	-
HVAC - Fine Art Additions	85	85	95	90	85	95	-	-	-	90	-	22	95	-	-
HVAC - Controls	50	55	-3	33	0	0	40	60	85	60	20	20	30	60	75
Roof - Orignial	25	71	94	86	0	0	45	68	100	61	20	17	-3	53	7
Roof - Shingled or Standing Seam	-	79	-	-	27	27	67	-	-	74	46	68	-	55	20
Roof - Additions	13	71	94	90	85	24	45	-	-	-	-	20	95	23	-
Roof - Additions	85	85	95	90	85	95	28	-	-	90	-	20	-	-	-
Roof - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Roof - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Electrical Panels	3	6	30	62	33	28	60	77	100	13	48	97	93	9	39
Elevators	-5	-3	11	53	18	15	-5	79	100	1	27	6	-	1	29
Fire Safety - Fire Alarm	40	5	-2	25	0	0	5	44	88	59	22	-10	3	30	11
Fire Safety - Sprinkler System	48	37	59	82	48	64	21	99	94	23	80	34	83	50	73
Food Service Boilers	70	5	70	28	-10	25	95	60	85	70	20	40	75	85	10
Food Service Freezers	50	55	-3	35	0	0	15	60	85	60	23	20	30	60	10
Generator	75	80	-	-	-	-	70	80	76	80	60	-	100	80	55
Lift Station	-	-	-	35	-	-	-	-	-	-	-	-	-	60	-
Flooring - Classroom - Carpet	-	-	70	-	70	70	-	-	-	-	-	80	87	-	-
Flooring - Classroom - VCT / LVT	50	60	-3	35	3	0	40	40	85	60	20	-	87	60	10
Flooring - Corridors	50	60	-3	35	0	0	40	35	90	40	20	5	40	60	10
Flooring - Library	50	60	70	13	50	70	20	35	80	60	-1	80	55	60	87
Flooring - Offices	50	60	70	13	60	40	20	60	80	60	-1	85	87	60	87
Flooring - Cafeteria	50	60	-3	35	70	0	40	35	90	60	20	50	40	60	90
Flooring - Kitchen	39	42	48	74	58	58	39	84	85	48	68	32	-10	42	64
Flooring - Band	50	60	70	13	70	70	20	35	85	60	-1	80	45	60	87
Flooring - Fine Art Additions	85	85	-	-	85	95	3	-	-	-	-	-	95	-	-
Flooring - Choir	50	60	70	35	70	70	20	35	85	60	-1	80	45	60	87
Flooring - Orchestra	50	60	70	13	70	70	20	35	85	60	-1	-13	45	60	87
Plastic Laminate	63	30	45	68	85	64	63	63	93	80	60	60	65	35	40
Doors	50	60	-3	35	0	25	-23	-23	85	60	20	-35	-40	60	10
Door Hardware	50	60	-3	35	0	0	-23	-23	85	60	20	-35	-40	60	10
Casework (Built Ins)	-23	60	-3	35	0	0	40	40	85	60	20	-35	-40	60	10
Restrooms - Faculty	50	60	-3	35	0	0	40	60	85	60	20	75	30	60	10
Restrooms - Student	50	60	-3	35	0	0	40	60	85	60	20	75	30	60	13
Restrooms - Addition	-	-	-	-	-	25	40	-	-	-	-	-	-	-	-
Marquee	60	7	18	100	30	25	3	47	80	73	47	67	-10	17	40
Paving - Parking Lots	42	42	53	74	58	58	42	84	94	48	64	32	28	48	55
Paving - Parking - Asphalt Overlay	-	-	-	-20	-	-	-	-	-	-	-	5	-	-	-
Paving - Sidewalks	28	28	38	-5	48	48	24	78	93	33	60	15	13	35	48
Exterior Lighting	50	60	0	35	0	0	75	60	85	60	20	20	85	60	10
Paint - Commons	33	47	47	73	73	67	-1	47	80	47	-1	53	87	47	-5
Paint - Cafeteria	33	47	47	73	73	73	87	47	80	47	-1	53	80	47	-5
Paint - Gyms	50	60	50	95	50	80	40	60	85	60	90	65	85	60	10
Paint - Exterior	50	63	65	35	75	75	75	60	85	60	20	20	-3	60	10
Paint - Hallways	50	60	65	90	85	80	40	60	85	60	20	75	85	60	10
Sports and Fine Arts	ACMS	BMS	CVMS	DMS	DWMS	DRMS	FWMS	GMS	HMS	HFMS	KMS	LVMS	LMS	MMS	SRMS
Perf Arts - Curtains	-	-	-	35	-	-	-	60	85	-	20	-	65	-	10
Perf Arts - Cafetorium Lighting	60	64	11	48	16	16	100	68	88	68	36	-18	80	71	24
Asphalt Track	50	10	90	33	-3	90	10	60	85	90	20	85	18	90	10
Field Lights	-	-	-	-	-	-	-	73	-	-	-	-	-	33	40
Bleachers - Exterior	-	-	-	-	44	-	-	80	-	-	-	-	-	-	55
Bleachers - Interior	3	7	27	57	30	30	7	73	90	13	47	-7	50	13	40
Gym Main - Flooring	28	30	45	43	48	48	28	80	93	83	60	15	10	35	55
Gym Aux - Flooring	88	30	45	43	48	48	98	80	93	35	60	15	10	35	55
Athletic Lockers	28	30	45	68	41	48	70	80	93	35	60	15	13	35	55
Athletic Benches	80	84	-3	74	0	0	76	84	94	84	23	-35	-40	84	10
Athletic Partitions	50	60	-3	35	-3	-3	40	60	85	60	20	50	30	60	10
Weight Room Floor	25	25	23	-	-	23	25	60	85	-	-	-	-	25	-
DETACHED WEIGHT ROOMS	ACMS	BMS	CVMS	DMS	DWMS	DRMS	FWMS	GMS	HMS	HFMS	KMS	LVMS	LMS	MMS	SRMS
HVAC	-	-	-	25	25	-	-	-	-	25	25	25	25	-	25
Roof - Flat	-	-	-	83	50	-	-	-	-	50	50	50	50	-	50
Flooring	-	-	-	25	20	-	-	-	-	25	25	25	25	-	23

ASSESSMENT SUMMARY
MIDDLE SCHOOLS

Current Year 2023

	ARBOR CREEK	BRIARHILL	CREEK VALLEY	DELAY	DOWNING	DURHAM	FORESTWOOD	GRIFFIN	HEDRICK	HUFFINES	KILLIAN	LAKEVIEW	LAMAR	MCKAMY	SHADOW RIDGE
YEAR BUILT	1994	1995	2001	1977	2002	2002	1994	2015	2020	1997	2007	1989	1987	1997	2005
Age	29	28	22	46	21	21	29	8	3	26	16	34	36	26	18
Foundation	-	-	-	-	-	-	-	-	94	-	-	-	-	-	-
HVAC - Original	42	52	-2	38	0	0	43	66	96	66	21	17	31	60	7
HVAC - Additions	21	24	26	-	-	24	27	-	-	-	-	25	-	26	-
HVAC - Fine Art Additions	85	85	95	90	85	95	-	-	-	90	-	22	95	-	-
HVAC - Controls	50	55	-3	33	0	0	40	60	85	60	20	20	30	60	75
Roof - Orignial	25	71	94	86	0	0	45	68	100	61	20	17	-3	53	7
Roof - Shingled or Standing Seam	-	79	-	-	27	27	67	-	-	74	46	68	-	55	20
Roof - Additions	13	71	94	90	85	24	45	-	-	-	-	20	95	23	-
Roof - Additions	85	85	95	90	85	95	28	-	-	90	-	20	-	-	-
Roof - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Roof - Additions	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Electrical Panels	3	6	30	62	33	28	60	77	100	13	48	97	93	9	39
Elevators	-5	-3	11	53	18	15	-5	79	100	1	27	6	-	1	29
Fire Safety - Fire Alarm	40	5	-2	25	0	0	5	44	88	59	22	-10	3	30	11
Fire Safety - Sprinkler System	48	37	59	82	48	64	21	99	94	23	80	34	83	50	73
Food Service Boilers	70	5	70	28	-10	25	95	60	85	70	20	40	75	85	10
Food Service Freezers	50	55	-3	35	0	0	15	60	85	60	23	20	30	60	10
Generator	75	80	-	-	-	-	70	80	76	80	60	-	100	80	55
Lift Station	-	-	-	35	-	-	-	-	-	-	-	-	-	60	-
Flooring - Classroom - Carpet	-	-	70	-	70	70	-	-	-	-	-	80	87	-	-
Flooring - Classroom - VCT / LVT	50	60	-3	35	3	0	40	40	85	60	20	-	87	60	10
Flooring - Corridors	50	60	-3	35	0	0	40	35	90	40	20	5	40	60	10
Flooring - Library	50	60	70	13	50	70	20	35	80	60	-1	80	55	60	87
Flooring - Offices	50	60	70	13	60	40	20	60	80	60	-1	85	87	60	87
Flooring - Cafeteria	50	60	-3	35	70	0	40	35	90	60	20	50	40	60	90
Flooring - Kitchen	39	42	48	74	58	58	39	84	85	48	68	32	-10	42	64
Flooring - Band	50	60	70	13	70	70	20	35	85	60	-1	80	45	60	87
Flooring - Fine Art Additions	85	85	-	-	85	95	3	-	-	-	-	-	95	-	-
Flooring - Choir	50	60	70	35	70	70	20	35	85	60	-1	80	45	60	87
Flooring - Orchestra	50	60	70	13	70	70	20	35	85	60	-1	-13	45	60	87
Plastic Laminate	63	30	45	68	85	64	63	63	93	80	60	60	65	35	40
Doors	50	60	-3	35	0	25	-23	-23	85	60	20	-35	-40	60	10
Door Hardware	50	60	-3	35	0	0	-23	-23	85	60	20	-35	-40	60	10
Casework (Built Ins)	-23	60	-3	35	0	0	40	40	85	60	20	-35	-40	60	10
Restrooms - Faculty	50	60	-3	35	0	0	40	60	85	60	20	75	30	60	10
Restrooms - Student	50	60	-3	35	0	0	40	60	85	60	20	75	30	60	13
Restrooms - Addition	-	-	-	-	-	25	40	-	-	-	-	-	-	-	-
Marquee	60	7	18	100	30	25	3	47	80	73	47	67	-10	17	40
Paving - Parking Lots	42	42	53	74	58	58	42	84	94	48	64	32	28	48	55
Paving - Parking - Asphalt Overlay	-	-	-	-20	-	-	-	-	-	-	-	5	-	-	-
Paving - Sidewalks	28	28	38	-5	48	48	24	78	93	33	60	15	13	35	48
Exterior Lighting	50	60	0	35	0	0	75	60	85	60	20	20	85	60	10
Paint - Commons	33	47	47	73	73	67	-1	47	80	47	-1	53	87	47	-5
Paint - Cafeteria	33	47	47	73	73	73	87	47	80	47	-1	53	80	47	-5
Paint - Gyms	50	60	50	95	50	80	40	60	85	60	90	65	85	60	10
Paint - Exterior	50	63	65	35	75	75	75	60	85	60	20	20	-3	60	10
Paint - Hallways	50	60	65	90	85	80	40	60	85	60	20	75	85	60	10
Sports and Fine Arts	ACMS	BMS	CVMS	DMS	DWMS	DRMS	FWMS	GMS	HMS	HFMS	KMS	LVMS	LMS	MMS	SRMS
Perf Arts - Curtains	-	-	-	35	-	-	-	60	85	-	20	-	65	-	10
Perf Arts - Cafetorium Lighting	60	64	11	48	16	16	100	68	88	68	36	-18	80	71	24
Asphalt Track	50	10	90	33	-3	90	10	60	85	90	20	85	18	90	10
Field Lights	-	-	-	-	-	-	-	73	-	-	-	-	-	33	40
Bleachers - Exterior	-	-	-	-	44	-	-	80	-	-	-	-	-	-	55
Bleachers - Interior	3	7	27	57	30	30	7	73	90	13	47	-7	50	13	40
Gym Main - Flooring	28	30	45	43	48	48	28	80	93	83	60	15	10	35	55
Gym Aux - Flooring	88	30	45	43	48	48	98	80	93	35	60	15	10	35	55
Athletic Lockers	28	30	45	68	41	48	70	80	93	35	60	15	13	35	55
Athletic Benches	80	84	-3	74	0	0	76	84	94	84	23	-35	-40	84	10
Athletic Partitions	50	60	-3	35	-3	-3	40	60	85	60	20	50	30	60	10
Weight Room Floor	25	25	23	-	-	23	25	60	85	-	-	-	-	25	-
DETACHED WEIGHT ROOMS	ACMS	BMS	CVMS	DMS	DWMS	DRMS	FWMS	GMS	HMS	HFMS	KMS	LVMS	LMS	MMS	SRMS
HVAC	-	-	-	25	25	-	-	-	-	25	25	25	25	-	25
Roof - Flat	-	-	-	83	50	-	-	-	-	50	50	50	50	-	50
Flooring	-	-	-	25	20	-	-	-	-	25	25	25	25	-	23

Arbor Creek MS

Year Built / Age 1994 / 29

Campus Square Footage 125,358

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1994**	**42**				
Arbor Creek MS - HVAC - Original	**20**	**2013**	50	50	-17%	**42**	**RTU**
Arbor Creek MS - HVAC - 2008 Addition	**20**	**2008**	25	25	-17%	**21**	**RTU (Weight Rm)**
Arbor Creek MS - HVAC - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	
Arbor Creek MS - HVAC - Controls	**20**	**2013**	50	50		**50**	**Controls = Alerton**
Arbor Creek MS - Ceiling and Lights - Original	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**Weight Rm**
Arbor Creek MS - Ceiling and Lights - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	
Arbor Creek MS - Roof - Flat	**20**	**2013**	50	50	-50%	**25**	
Arbor Creek MS - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	-50%	**13**	
Arbor Creek MS - Roof - Flat - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	
Arbor Creek MS - Electrical Switchgear	**30**	**1994**	3	3	3%	**3**	
Arbor Creek MS - Elevator	**25**	**1994**	-16	5	3%	**-5**	**Dover**
Arbor Creek MS - Fire Safety - Fire Alarm	**20**	**2013**	50	40	-12%	**40**	**Edwards EST 2 - Limited Parts**
Arbor Creek MS - Fire Safety - ERRS	**-**					**-**	
Arbor Creek MS - Fire Safety - Sprinkler System	**50**	**1994**	42	42	14%	**48**	
Arbor Creek MS - Food Service Boilers	**20**	**2017**	70	70		**70**	
Arbor Creek MS - Food Service Freezers	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Generator	**40**	**2013**	75	75		**75**	**Generac - Diesel; 150 KW**
Arbor Creek MS - Flooring - Classroom	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Corridors	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Library	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Offices	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Cafeteria	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Kitchen	**50**	**1994**	42	35		**39**	**Terrazzo - small cracks**
Arbor Creek MS - Flooring - Band	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Choir	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Orchestra	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**LVT**
Arbor Creek MS - Plastic Laminate	**40**	**2008**	63	63		**63**	
Arbor Creek MS - Doors	**20**	**2013**	50	50		**50**	**Dark Mahongany**
Arbor Creek MS - Door Hardware	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Casework (Built-Ins)	**20**	**1994**	-45	0		**-23**	**Art, Science & Office 2013**
Arbor Creek MS - Restrooms - Faculty	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Restrooms - Student	**20**	**2013**	50	50		**50**	**Solid plastic partitions**
Arbor Creek MS - Marquee	**15**	**2017**	60	60		**60**	**LED; Digital**
Arbor Creek MS - Paving - Parking Lots	**50**	**1994**	42	42		**42**	
Arbor Creek MS - Paving - Sidewalks	**40**	**1994**	28	28		**28**	
Arbor Creek MS - Exterior Lighting	**20**	**2013**	50	50		**50**	**Pole lights LED bulbs 2021**
Arbor Creek MS - Paint - Commons	**15**	**2013**	33	33		**33**	**Maintained paint - touched up 2018**
Arbor Creek MS - Paint - Cafeteria	**15**	**2013**	33	33		**33**	**Lower walls painted 2018**
Arbor Creek MS - Paint - Gyms	**20**	**2013**	50	50		**50**	**Lower walls painted 2018**
Arbor Creek MS - Paint - Exterior	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Paint - Hallways	**20**	**2013**	50	50		**50**	**Painted as needed 2018**
Sports and Fine Arts							
Arbor Creek MS - Perf Arts - Curtains	**-**					**-**	
Arbor Creek MS - Perf Arts - Cafetorium Lighting	**25**	**2013**	60	60		**60**	
Arbor Creek MS - Asphalt Track	**20**	**2014**	55	45		**50**	**partial replacement on far side of track - some minor cracking due to soil & heat. Repainted track lines 2022**
Arbor Creek MS - Field Lights	**-**					**-**	
Arbor Creek MS - Bleachers - Exterior	**-**					**-**	
Arbor Creek MS - Bleachers - Interior	**30**	**1994**	3	3		**3**	**Added aisles and railings 2019**
Arbor Creek MS - Gym Main - Flooring	**40**	**1994**	28	28		**28**	**Sanded and Refinished 2021**
Arbor Creek MS - Gym Aux - Flooring	**40**	**2018**	88	88		**88**	
Arbor Creek MS - Athletic Lockers	**40**	**1994**	28	28		**28**	
Arbor Creek MS - Athletic Benches	**50**	**2013**	80	80		**80**	**Concrete**
Arbor Creek MS - Athletic Partitions	**20**	**2013**	50	50		**50**	**Solid Plastic**
Arbor Creek MS - Weight Room Floor	**20**	**2008**	25	25		**25**	**Rubber**

Briarhill MS

Year Built / Age 1995 / 28

Campus Square Footage 125,600

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1995**	**44**				
Briarhill MS - HVAC- Original	**20**	**2014**	55	55	-5%	**52**	**RTU & VRF**
Briarhill MS - HVAC - 2008 Addition	**20**	**2008**	25	25	-5%	**24**	**Weight Room**
Briarhill MS - HVAC - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	
Briarhill MS - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Briarhill MS - Ceiling and Lights - Original	**20**	**2014**	55	55		**55**	**LED**
Briarhill MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**LED**
Briarhill MS - Ceiling and Lights - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	**LED**
Briarhill MS - Roof - Flat	**20**	**2018**	75	75	-5%	**71**	**2017 hail damage insurance replacement**
Briarhill MS - Roof - Standing Seam	**30**	**2018**	83	83	-5%	**79**	**2017 hail damage insurance replacement**
Briarhill MS - Roof - 2008 Addition	**20**	**2018**	75	75	-5%	**71**	**Weight Room; 2017 hail damage insurance replacement**
Briarhill MS - Roof - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	
Briarhill MS - Electrical Switchgear	**30**	**1995**	7	7	-6%	**6**	**Square D**
Briarhill MS - Elevator	**25**	**1995**	-12	5	10%	**-3**	**Dover**
Briarhill MS - Fire Safety - Fire Alarm	**20**	**2004**	5	5	0%	**5**	**Edwards EST 2 - Limited Parts; New smoke detectors 2014**
Briarhill MS - Fire Safety - ERRS	**-**					**-**	
Briarhill MS - Fire Safety - Sprinkler System	**50**	**1995**	44	44	-15%	**37**	
Briarhill MS - Food Service Boilers	**20**	**2004**	5	5		**5**	**Tank and Heater 2004**
Briarhill MS - Food Service Freezers	**20**	**2014**	55	55		**55**	
Briarhill MS - Generator	**40**	**2015**	80	80		**80**	**Cummins - Diesel; 200 KW**
Briarhill MS - Flooring - Classrooms	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Corridors	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Library	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Cafeteria	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Kitchen	**50**	**1995**	44	40		**42**	**Terrazzo**
Briarhill MS - Flooring - Band	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Choir	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Orchestra	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**VCT**
Briarhill MS - Plastic Laminate	**40**	**1995**	30	30		**30**	**Tack wall in classrooms failing**
Briarhill MS - Doors	**20**	**2015**	60	60		**60**	
Briarhill MS - Door Hardware	**20**	**2015**	60	60		**60**	**Need to look at replacing exterior**
Briarhill MS - Casework (Built-Ins)	**20**	**2015**	60	60		**60**	
Briarhill MS - Restrooms - Faculty	**20**	**2015**	60	60		**60**	
Briarhill MS - Restrooms - Student	**20**	**2015**	60	60		**60**	
Briarhill MS - Marquee	**30**	**1995**	7	7		**7**	**Not lit**
Briarhill MS - Paving - Parking Lots	**50**	**1995**	44	40		**42**	**Some breakups and cracking.**
Briarhill MS - Paving - Sidewalks	**40**	**1995**	30	25		**28**	**Front entry walkway cracking**
Briarhill MS - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
Briarhill MS - Paint - Commons	**15**	**2015**	47	47		**47**	**Admin offices painted Summer 2017 - 2018**
Briarhill MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	**Lower walls painted 2018**
Briarhill MS - Paint - Gyms	**20**	**2015**	60	60		**60**	**Lower walls painted 2019**
Briarhill MS - Paint - Exterior	**20**	**2015**	60	65		**63**	**Light poles, metal doors & posts painted 2018**
Briarhill MS - Paint - Hallways	**20**	**2015**	60	60		**60**	
Sports and Fine Arts							
Briarhill MS - Perf Arts - Curtains	**-**					**-**	
Briarhill MS - Perf Arts - Cafetorium Lighting	**25**	**2014**	64	64		**64**	**LED**
Briarhill MS - Asphalt Track	**20**	**2005**	10	10		**10**	**Cracked edge / underside / east drain:deep hole - sealed in 2019; heavy use**
Briarhill MS - Field Lights	**-**					**-**	
Briarhill MS - Bleachers - Exterior	**-**					**-**	
Briarhill MS - Bleachers - Interior	**30**	**1995**	7	7		**7**	**Castors Replaced 2019**
Briarhill MS - Gym Main - Flooring	**40**	**1995**	30	30		**30**	
Briarhill MS - Gym Aux - Flooring	**40**	**1995**	30	30		**30**	**2020 Sanded and Refinished**
Briarhill MS - Athletic Lockers	**40**	**1995**	30	30		**30**	**Hardware in bad shape**
Briarhill MS - Athletic Benches	**50**	**2015**	84	84		**84**	**concrete**
Briarhill MS - Athletic Partitions	**20**	**2015**	60	60		**60**	
Briarhill MS - Weight Room Floor	**20**	**2008**	25	25		**25**	**Rubber**

Creek Valley MS

Year Built / Age 2001 / 22

Campus Square Footage 129,724

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2001**	**56**				
Creek Valley MS - HVAC	**20**	**2001**	-10	5	3%	**-2**	**RTU**
Creek Valley MS - HVAC - 2008 Addition	**20**	**2008**	25	25	3%	**26**	**Weight Rm**
Creek Valley MS - HVAC - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Creek Valley MS - HVAC - Controls	**20**	**2001**	-10	5		**-3**	**Controls = I/net**
Creek Valley MS - Ceiling and Lights	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	15		**20**	**Weight Rm**
Creek Valley MS - Ceiling and Lights - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Creek Valley MS - Roof - Flat	**20**	**2020**	85	85	10%	**94**	**4-Ply Built-up, standing seam; 6/2018 Storm Damage**
Creek Valley MS - Roof - 2008 Addition	**20**	**2020**	85	85	10%	**94**	**6/2018 Storm Damage**
Creek Valley MS - Roof - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Creek Valley MS - Roof - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Creek Valley MS - Electrical Switchgear	**30**	**2001**	27	27	12%	**30**	
Creek Valley MS - Elevator	**25**	**2001**	12	12	-5%	**11**	**Dover**
Creek Valley MS - Fire Safety - Fire Alarm	**20**	**2001**	-10	5	16%	**-2**	**Edwards EST 2 - Limited Parts**
Creek Valley MS - Fire Safety - ERRS	**-**					**-**	
Creek Valley MS - Fire Safety - Sprinkler System	**50**	**2001**	56	56	5%	**59**	
Creek Valley MS - Food Service Boilers	**20**	**2017**	70	70		**70**	
Creek Valley MS - Food Service Freezers	**20**	**2001**	-10	5		**-3**	**Walk in cooler coil replaced 2023**
Creek Valley MS - Generator	**-**					**-**	
Creek Valley MS - Flooring - Classroom VCT	**20**	**2017**	70	70		**70**	**VCT**
Creek Valley MS - Flooring - Classroom VCT	**20**	**2001**	-10	5		**-3**	**VCT**
Creek Valley MS - Flooring - Corridors	**20**	**2001**	-10	5		**-3**	**VCT**
Creek Valley MS - Flooring - Library	**20**	**2017**	70	70		**70**	**LVT**
Creek Valley MS - Flooring - Offices	**20**	**2017**	70	70		**70**	**LVT**
Creek Valley MS - Flooring - Cafeteria	**20**	**2001**	-10	5		**-3**	**VCT - joints showing**
Creek Valley MS - Flooring - Kitchen	**50**	**2001**	56	40		**48**	**Terrazzo**
Creek Valley MS - Flooring - Band	**20**	**2017**	70	70		**70**	**VCT**
Creek Valley MS - Flooring - Choir	**20**	**2017**	70	70		**70**	**VCT**
Creek Valley MS - Flooring - Orchestra	**20**	**2017**	70	70		**70**	**VCT**
Creek Valley MS - Flooring - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	**VCT**
Creek Valley MS - Plastic Laminate	**40**	**2001**	45	45		**45**	
Creek Valley MS - Doors	**20**	**2001**	-10	5		**-3**	**Golden Oak**
Creek Valley MS - Door Hardware	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Casework (Built-Ins)	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Casework (Built-Ins)	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Restrooms - Faculty	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Restrooms - Student	**20**	**2001**	-10	5		**-3**	**Ceramic Tile floor, cmu painted walls, P-Lam partitions**
Creek Valley MS - Marquee	**30**	**2001**	27	10		**18**	**Brick**
Creek Valley MS - Paving - Parking Lots	**50**	**2001**	56	50		**53**	**Concrete, some cracking @ control joints**
Creek Valley MS - Paving - Sidewalks	**40**	**2001**	45	30		**38**	**Sinkage of 3-4" at door 5.**
Creek Valley MS - Exterior Lighting	**20**	**2001**	-10	10		**0**	**Pole lights LED bulbs 2021**
Creek Valley MS - Paint - Commons	**15**	**2015**	47	47		**47**	**2017 All areas & office complex**
Creek Valley MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	**Lower walls 2017**
Creek Valley MS - Paint - Gyms	**20**	**2013**	50	50		**50**	**Did not paint ceiling / stripe in 2013; Upper Gym painted Summer 2017**
Creek Valley MS - Paint - Exterior	**20**	**2016**	65	65		**65**	
Creek Valley MS - Paint - Hallways	**20**	**2016**	65	65		**65**	**Athletic Area: 2015**
Sports and Fine Arts							
Creek Valley MS - Perf Arts - Curtains	**-**					**-**	
Creek Valley MS - Perf Arts - Cafetorium Lighting	**25**	**2001**	12	10		**11**	
Creek Valley MS - Asphalt Track	**20**	**2021**	90	90		**90**	
Creek Valley MS - Field Lights	**-**					**-**	
Creek Valley MS - Bleachers - Exterior	**-**					**-**	
Creek Valley MS - Bleachers - Interior	**30**	**2001**	27	27		**27**	
Creek Valley MS - Gym Main - Flooring	**40**	**2001**	45	45		**45**	**2020 Sanded and refinished (mascot added)**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Creek Valley MS - Gym Aux - Flooring	**40**	**2001**	45	45		**45**	**2020 Sanded and refinished (mascot added)**
Creek Valley MS - Athletic Lockers	**40**	**2001**	45	45		**45**	
Creek Valley MS - Athletic Benches	**20**	**2001**	-10	5		**-3**	**Varsity:epoxy over wood; Need to plan soon**
Creek Valley MS - Athletic Partitions	**20**	**2001**	-10	5		**-3**	**P-Lam; Water Damage**
Creek Valley MS - Weight Room Floor	**20**	**2008**	25	20		**23**	**Rubber**

DeLay MS

Year Built / Age 1977 / 46

Campus Square Footage 182,385

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1977**	**8**				
DeLay MS - HVAC	**20**	**2010**	35	35	10%	**38**	**RTU**
Delay MS - HVAC - 2021 Fine Arts Addition	**20**	**2021**	90	90		**90**	
DeLay MS - HVAC - Control	**20**	**2010**	35	30		**33**	**Controls = Alerton (control)/Automated Logic (hardware)**
DeLay MS - Ceiling and Lights	**20**	**2010**	35	35		**35**	**T5**
DeLay MS - Ceiling and Lights - 2021 Addition	**20**	**2021**	90	90		**90**	**LED**
DeLay MS - Roof - Flat	**20**	**2018**	75	75	15%	**86**	**2017 hail damage insurance replacement; issues with skylights**
DeLay MS - Roof - Flat - 2021 Fine Art Addition	**20**	**2021**	90	90		**90**	
DeLay MS - Electrical Switchgear	**30**	**2010**	57	57	9%	**62**	
DeLay MS - Elevator #1 (Front)	**25**	**2010**	48	48	10%	**53**	**Schindler**
DeLay MS - Elevator #2 (Back)	**25**	**2010**	48	48	20%	**57**	**Schindler**
DeLay MS - Fire Safety - Fire Alarm	**20**	**2010**	35	35	-28%	**25**	**Harrington**
DeLay MS - Fire Safety - ERRS	**-**					**-**	
DeLay MS - Fire Safety - Sprinkler System	**50**	**2010**	74	74	11%	**82**	
DeLay MS - Food Service Boilers	**20**	**2009**	30	25		**28**	**2 tanks - 1 scheduled for replacement 2023**
DeLay MS - Food Service Freezers	**20**	**2010**	35	35		**35**	
DeLay MS - Generator	**-**					**-**	
DeLay MS - Lift Station	**20**	**2010**	35	35		**35**	
DeLay MS - Flooring - Classroom VCT	**20**	**2010**	35	35		**35**	**VCT**
DeLay MS - Flooring - Corridors	**20**	**2010**	35	35		**35**	**VCT - Hallway lockers are showing wear.**
DeLay MS - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet**
DeLay MS - Flooring - Offices	**15**	**2010**	13	13		**13**	**Carpet**
DeLay MS - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	**VCT; Campus reports Café is too small, review size in future Bond**
DeLay MS - Flooring - Kitchen	**50**	**2010**	74	74		**74**	**Terrazzo**
DeLay MS - Flooring - Band	**15**	**2010**	13	13		**13**	**Carpet**
DeLay MS - Flooring - Choir	**20**	**2010**	35	35		**35**	**VCT**
DeLay MS - Flooring - Orchestra	**15**	**2010**	13	13		**13**	**Carpet**
Delay MS - Flooring - 2020 Fine Art Addition	**20**	**2021**	90	90		**90**	
DeLay MS - Plastic Laminate	**40**	**2010**	68	68		**68**	
DeLay MS - Doors	**20**	**2010**	35	35		**35**	**Mahogany**
DeLay MS - Door Hardware	**20**	**2010**	35	35		**35**	
DeLay MS - Casework (Built-Ins)	**20**	**2010**	35	35		**35**	
DeLay MS - Restrooms - Faculty	**20**	**2010**	35	35		**35**	
DeLay MS - Restrooms - Student	**20**	**2010**	35	35		**35**	**CMU partitions, ceramic tile floor**
DeLay MS - Marquee	**30**	**2023**	100	100		**100**	**Digital**
DeLay MS - Paving - Parking Lots	**50**	**2010**	74	74		**74**	
DeLay MS - Paving - Asphalt Parking Lots	**20**	**1995**	-40	0		**-20**	**Partial asphalt - Repairs needed**
DeLay MS - Paving - Sidewalks	**40**	**1977**	-15	5		**-5**	**Repairs needed**
DeLay MS - Exterior Lighting	**20**	**2010**	35	35		**35**	
DeLay MS - Paint - Commons	**15**	**2019**	73	73		**73**	
DeLay MS - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
DeLay MS - Paint - Gyms	**20**	**2022**	95	95		**95**	
DeLay MS - Paint - Exterior	**20**	**2010**	35	35		**35**	
DeLay MS - Paint - Hallways	**20**	**2021**	90	90		**90**	
Sports and Fine Arts							
DeLay MS - Perf Arts - Curtains	**20**	**2010**	35	35		**35**	
DeLay MS - Perf Arts - Cafetorium Lighting	**25**	**2010**	48	48		**48**	
DeLay MS - Asphalt Track	**20**	**2010**	35	30		**33**	**A few cracks concrete curb both sides.**
DeLay MS - Field Lights	**-**					**-**	
DeLay MS - Bleachers - Exterior	**-**					**-**	
DeLay MS - Bleachers - Interior	**30**	**2010**	57	57		**57**	
DeLay MS - Gym Main - Flooring	**40**	**2000**	43	43		**43**	**2020 Sanded and refinished**
DeLay MS - Gym Aux - Flooring	**40**	**2000**	43	43		**43**	**2020 Sanded and refinished**
DeLay MS - Athletic Lockers	**40**	**2010**	68	68		**68**	
DeLay MS - Athletic Benches	**50**	**2010**	74	74		**74**	**Concrete**
DeLay MS - Athletic Partitions	**20**	**2010**	35	35		**35**	**CMU**
WEIGHT ROOM 2010							
DeLay MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
DeLay MS - Weight Room Roof - Metal	**30**	**2018**	83	83		**83**	**2017 hail damage insurance replacement**
DeLay MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber; interior painted 2019**

Downing MS

Year Built / Age 2002 / 21

Campus Square Footage 128,660

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2002**	**58**				
Downing MS - HVAC	**20**	**2002**	-5	5	-4%	**0**	**RTU**
Downing MS - HVAC - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**RTU**
Downing MS - HVAC - Controls	**20**	**2002**	-5	5		**0**	**Controls = I/net**
Downing MS - Ceiling and Lights	**20**	**2002**	-5	5		**0**	**T-8**
Downing MS - Ceiling and Lights - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**LED**
Downing MS - Roof - Flat	**20**	**2002**	-5	5	-9%	**0**	
Downing MS - Roof - Flat - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	
Downing MS - Roof - Standing Seam	**30**	**2002**	30	30	-9%	**27**	
Downing MS - Electrical Switchgear	**30**	**2002**	30	30	10%	**33**	**Siemens**
Downing MS - Elevator	**25**	**2002**	16	16	13%	**18**	**Thyssen Krupp**
Downing MS - Fire Safety - Fire Alarm	**20**	**2002**	-5	5	8%	**0**	**Edwards EST 2 - Limited Parts**
Downing MS - Fire Safety - ERRS	**-**					**-**	
Downing MS - Fire Safety - Sprinkler System	**50**	**2002**	58	58	-18%	**48**	
Downing MS - Food Service Boilers	**20**	**1999**	-20	0		**-10**	**Tank 2005**
Downing MS - Food Service Freezers	**20**	**2002**	-5	5		**0**	
Downing MS - Generator	**-**					**-**	
Downing MS - Flooring - Classrooms Carpet	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - Classrooms VCT	**20**	**2003**	0	5		**3**	**VCT**
Downing MS - Flooring - Corridors	**20**	**2002**	-5	5		**0**	**VCT**
Downing MS - Flooring - Library	**20**	**2013**	50	50		**50**	**LVT**
Downing MS - Flooring - Offices	**15**	**2017**	60	60		**60**	**Carpet/VCT front**
Downing MS - Flooring - Cafeteria	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - Kitchen	**50**	**2002**	58	58		**58**	**Terrazzo - Good Shape**
Downing MS - Flooring - Band	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - Choir	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - Orchestra	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**VCT**
Downing MS - Plastic Laminate	**40**	**2002**	48	48		**48**	
Downing MS - Doors	**20**	**2002**	-5	5		**0**	**Medium Brown**
Downing MS - Door Hardware	**20**	**2002**	-5	5		**0**	
Downing MS - Casework (Built-Ins)	**20**	**2002**	-5	5		**0**	**Maroon Base/Tan Counter**
Downing MS - Restrooms - Faculty	**20**	**2002**	-5	5		**0**	
Downing MS - Restrooms - Student	**20**	**2002**	-5	5		**0**	**P-Lam partitions**
Downing MS - Marquee	**30**	**2002**	30	30		**30**	**not lit**
Downing MS - Paving - Parking Lots	**50**	**2002**	58	58		**58**	**Good - Minimal Heaving**
Downing MS - Paving - Sidewalks	**40**	**2002**	48	48		**48**	
Downing MS - Exterior Lighting	**20**	**2002**	-5	5		**0**	**Orig lights/white**
Downing MS - Paint - Commons	**15**	**2019**	73	73		**73**	
Downing MS - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
Downing MS - Paint - Gyms	**20**	**2013**	50	50		**50**	
Downing MS - Paint - Exterior	**20**	**2018**	75	75		**75**	**Summer 2018 Paint exterior plaster walls**
Downing MS - Paint - Hallways	**20**	**2020**	85	85		**85**	
Sports and Fine Arts							
Downing MS - Perf Arts - Curtains	**-**					**-**	
Downing MS - Perf Arts - Cafetorium Lighting	**25**	**2002**	16	16		**16**	**6 Fixtures**
Downing MS - Asphalt Track	**20**	**2002**	-5	0		**-3**	**Few cracks; need to fill in cracks or re-seal**
Downing MS - Field Lights	**-**					**-**	
Downing MS - Bleachers - Exterior	**40**	**2002**	48	40		**44**	**1 set, portable, 3-tier; fair condition**
Downing MS - Bleachers - Interior	**30**	**2002**	30	30		**30**	**Plastic original**
Downing MS - Gym Main - Flooring	**40**	**2002**	48	48		**48**	**Sanding & Refinishing scheduled Summer 2022**
Downing MS - Gym Aux - Flooring	**40**	**2002**	48	48		**48**	**needs sanding**
Downing MS - Athletic Lockers	**40**	**2002**	48	35		**41**	**Need Paint**
Downing MS - Athletic Benches	**20**	**2002**	-5	5		**0**	**Epoxy tops**
Downing MS - Athletic Partitions	**20**	**2002**	-5	0		**-3**	**P-Lam**
WEIGHT ROOM 2008							
Downing MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Downing MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Downing MS - Weight Room Flooring	**20**	**2008**	25	15		**20**	**Rubber**

Durham MS

Year Built / Age 2002 / 21

Campus Square Footage 129,757

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2002**	**58**				
Durham MS - HVAC - Original	**20**	**2002**	-5	5	-5%	**0**	**RTU**
Durham MS - HVAC - 2008 Addition	**20**	**2008**	25	25	-5%	**24**	
Durham MS - HVAC - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Durham MS - HVAC - Controls	**20**	**2002**	-5	5		**0**	**Controls = I/net**
Durham MS - Ceiling and Lights - Original	**20**	**2002**	-5	5		**0**	
Durham MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	
Durham MS - Ceiling and Lights - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Durham MS - Roof - Flat	**20**	**2002**	-5	5	-3%	**0**	**4-Ply Built-up**
Durham MS - Roof - Standing Seam	**30**	**2002**	30	25	-3%	**27**	
Durham MS - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	-3%	**24**	
Durham MS - Roof - Flat - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Durham MS - Electrical Switchgear	**30**	**2002**	30	30	-5%	**28**	
Durham MS - Elevator	**25**	**2002**	16	15	-4%	**15**	**Thyssen Krupp; wall to elevator needs to be removed**
Durham MS - Fire Safety - Fire Alarm	**20**	**2002**	-5	5	8%	**0**	**Edwards EST 2 - Limited Parts**
Durham MS - Fire Safety - ERRS	**-**					**-**	
Durham MS - Fire Safety - Sprinkler System	**50**	**2002**	58	58	10%	**64**	
Durham MS - Food Service Boilers	**20**	**2008**	25	25		**25**	
Durham MS - Food Service Freezers	**20**	**2002**	-5	5		**0**	
Durham MS - Generator	**-**					**-**	
Durham MS - Flooring - Classrooms-VCT	**20**	**2017**	70	70		**70**	**VCT**
Durham MS - Flooring - Classrooms-VCT	**20**	**2002**	-5	5		**0**	**VCT - C-Tile**
Durham MS - Flooring - Corridors	**20**	**2002**	-5	5		**0**	**VCT; wood base**
Durham MS - Flooring - Library	**20**	**2017**	70	70		**70**	**LVT**
Durham MS - Flooring - Offices	**15**	**2014**	40	40		**40**	**Carpet - half VCT**
Durham MS - Flooring - Cafeteria	**20**	**2002**	-5	5		**0**	**VCT**
Durham MS - Flooring - Kitchen	**50**	**2002**	58	58		**58**	**Terrazzo**
Durham MS - Flooring - Band	**20**	**2017**	70	70		**70**	**VCT**
Durham MS - Flooring - Choir	**20**	**2017**	70	70		**70**	**VCT**
Durham MS - Flooring - Orchestra	**20**	**2017**	70	70		**70**	**VCT**
Durham MS - Flooring - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	**VCT**
Durham MS - Plastic Laminate	**40**	**2008**	63	63		**63**	
Durham MS - Doors	**20**	**2002**	-5	5		**0**	**Medium Dark**
Durham MS - Door Hardware	**20**	**2002**	-5	5		**0**	
Durham MS - Casework (Built-Ins)	**20**	**2002**	-5	5		**0**	**Grey tops**
Durham MS - Restrooms - Faculty	**20**	**2002**	-5	5		**0**	
Durham MS - Restrooms - Student	**20**	**2002**	-5	5		**0**	**Ceramic Tile floors/walls, P-Lam partitions**
Durham MS - Restrooms - 2008 Addition	**20**	**2008**	25	25		**25**	
Durham MS - Marquee	**30**	**2002**	30	20		**25**	**Brick**
Durham MS - Paving - Parking Lots	**50**	**2002**	58	58		**58**	**Concrete**
Durham MS - Paving - Sidewalks	**40**	**2002**	48	48		**48**	**Concrete, no heaving**
Durham MS - Exterior Lighting	**20**	**2002**	-5	5		**0**	
Durham MS - Paint - Commons	**15**	**2018**	67	67		**67**	**2018 - 2019**
Durham MS - Paint - Cafeteria	**15**	**2019**	73	73		**73**	**2019**
Durham MS - Paint - Gyms	**20**	**2019**	80	80		**80**	**2019**
Durham MS - Paint - Exterior	**20**	**2018**	75	75		**75**	**Summer 2018**
Durham MS - Paint - Hallways	**20**	**2019**	80	80		**80**	**2019**
Sports and Fine Arts							
Durham MS - Perf Arts - Curtains	**-**					**-**	
Durham MS - Perf Arts - Cafetorium Lighting	**25**	**2002**	16	16		**16**	
Durham MS - Asphalt Track	**20**	**2021**	90	90		**90**	
Durham MS - Field Lights	**-**					**-**	
Durham MS - Bleachers - Exterior	**-**					**-**	
Durham MS - Bleachers - Interior	**30**	**2002**	30	30		**30**	
Durham MS - Gym Main - Flooring	**40**	**2002**	48	48		**48**	**Sanding & Refinishing scheduled Summer 2022**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Durham MS - Gym Aux - Flooring	40	2002	48	48		48	Sanding & Refinishing scheduled Summer 2022
Durham MS - Athletic Lockers	40	2002	48	48		48	
Durham MS - Athletic Benches	20	2002	-5	5		0	Epoxy is bad
Durham MS - Athletic Partitions	20	2002	-5	0		-3	P-Lam
Durham MS - Weight Room Floor	20	2008	25	20		23	Rubber

Forestwood MS

Year Built / Age 1994 / 29

Campus Square Footage 143,865

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1994**	**42**				
Forestwood MS - HVAC	**20**	**2011**	40	40	7%	**43**	**RTU**
Forestwood MS - HVAC - 2001 Addition	**20**	**2011**	40	40	7%	**43**	**RTU**
Forestwood MS - HVAC - 2008 Addition	**20**	**2008**	25	25	7%	**27**	**Weight Room addition; RTU**
Forestwood MS - HVAC - Contols	**20**	**2011**	40	40		**40**	**Controls = Alerton**
Forestwood MS - Ceiling and Lights	**20**	**2011**	40	40		**40**	**T5**
Forestwood MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**T5**
Forestwood MS - Roof - Flat	**20**	**2011**	40	40	12%	**45**	**4 ply built up**
Forestwood MS - Roof - Standing Seam	**30**	**2011**	60	60	12%	**67**	
Forestwood MS - Roof - 2001 Addition	**20**	**2011**	40	40	12%	**45**	**4 ply built up**
Forestwood MS - Roof - 2008 Addition	**20**	**2008**	25	25	12%	**28**	**4 ply built up**
Forestwood MS - Electrical Switchgear	**30**	**2011**	60	60	0%	**60**	**Square D**
Forestwood MS - Elevator	**25**	**1994**	-16	5	14%	**-5**	**Dover; needs fire hat service**
Forestwood MS - Fire Safety - Fire Alarm	**20**	**2004**	5	5	-8%	**5**	**Edwards EST 2 - Limited Parts**
Forestwood MS - Fire Safety - ERRS	**-**					**-**	
Forestwood MS - Fire Safety - Sprinkler System	**50**	**1994**	42	42	-50%	**21**	
Forestwood MS - Food Service Boilers	**20**	**2022**	95	95		**95**	
Forestwood MS - Food Service Freezers	**20**	**2006**	15	15		**15**	
Forestwood MS - Generator	**40**	**2011**	70	70		**70**	**Cummins - Natural Gas; 140 KW**
Forestwood MS - Flooring - Classrooms	**20**	**2011**	40	40		**40**	**VCT**
Forestwood MS - Flooring - Corridors	**20**	**2011**	40	40		**40**	**VCT**
Forestwood MS - Flooring - Library	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Flooring - Offices	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Flooring - Cafeteria	**20**	**2011**	40	40		**40**	**VCT**
Forestwood MS - Flooring - Kitchen	**50**	**1994**	42	35		**39**	**Terrazzo, some cracking**
Forestwood MS - Flooring - Band - Original	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Flooring - Band - 2008	**15**	**2008**	0	5		**3**	**Carpet**
Forestwood MS - Flooring - Choir	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Flooring - Orchestra	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Plastic Laminate	**40**	**2008**	63	63		**63**	
Forestwood MS - Doors	**20**	**1994**	-45	0		**-23**	**Gym Doors replaced 2011; Light color**
Forestwood MS - Door Hardware	**20**	**1994**	-45	0		**-23**	
Forestwood MS - Casework (Built-Ins)	**20**	**2011**	40	40		**40**	
Forestwood MS - Restrooms - Faculty	**20**	**2011**	40	40		**40**	
Forestwood MS - Restrooms - Student	**20**	**2011**	40	40		**40**	**Floor urinals**
Forestwood MS - Restrooms - 2001 Addition	**20**	**2011**	40	40		**40**	
Forestwood MS - Marquee	**30**	**1993**	0	5		**3**	**Capstone replaced & Direct Wired LED 2019**
Forestwood MS - Paving - Parking Lots	**50**	**1994**	42	42		**42**	**Concrete**
Forestwood MS - Paving - Sidewalks	**40**	**1994**	28	20		**24**	**Back area movement**
Forestwood MS - Exterior Lighting	**20**	**2018**	75	75		**75**	**Wall packs: 2011; Poles LED 2018-2019**
Forestwood MS - Paint - Commons	**15**	**2007**	-7	5		**-1**	
Forestwood MS - Paint - Cafeteria	**15**	**2021**	87	87		**87**	
Forestwood MS - Paint - Gyms	**20**	**2011**	40	40		**40**	
Forestwood MS - Paint - Exterior	**20**	**2018**	75	75		**75**	**New Rails 2015**
Forestwood MS - Paint - Hallways	**20**	**2011**	40	40		**40**	**2019 touch-ups**
Sports and Fine Arts							
Forestwood MS - Perf Arts - Curtains	**-**					**-**	
Forestwood MS - Perf Arts - Cafetorium Lighting	**25**	**2023**	100	100		**100**	
Forestwood MS - Asphalt Track	**20**	**2005**	10	10		**10**	**Some cracking; poor shape due trees; different than other MS Tracks**
Forestwood MS - Field Lights	**-**					**-**	
Forestwood MS - Bleachers - Exterior	**-**					**-**	
Forestwood MS - Bleachers - Interior	**30**	**1995**	7	7		**7**	
Forestwood MS - Gym Main - Flooring	**40**	**1994**	28	28		**28**	**Sanded & Refinished Oct. 2021**
Forestwood MS - Gym Aux - Flooring	**40**	**2022**	98	98		**98**	
Forestwood MS - Athletic Lockers	**40**	**2011**	70	70		**70**	
Forestwood MS - Athletic Benches	**50**	**2011**	76	76		**76**	**Concrete**
Forestwood MS - Athletic Partitions	**20**	**2011**	40	40		**40**	**Block and solid plastic**
Forestwood MS - Weight Room Floor	**20**	**2008**	25	25		**25**	**Rubber**

Griffin MS

Year Built / Age 2015 / 8

Campus Square Footage 182,266

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2015**	**84**				
Griffin MS - HVAC	**20**	**2015**	60	60	9%	**66**	**RTU**
Griffin MS - HVAC - Control	**20**	**2015**	60	60		**60**	**Controls = Alerton**
Griffin MS - Ceiling and Lights	**20**	**2015**	60	60		**60**	**Classrooms and partial hallway LED**
Griffin MS - Roof - Flat	**20**	**2015**	60	60	14%	**68**	
Griffin MS - Electrical Switchgear	**30**	**2015**	73	73	6%	**77**	
Griffin MS - Elevator	**25**	**2015**	68	68	16%	**79**	**Thyssen Krupp**
Griffin MS - Fire Safety - Fire Alarm	**20**	**2015**	60	25	4%	**44**	**Edwards EST 2 - Limited Parts/unsupported**
Griffin MS - Fire Safety - ERRS	**-**					**-**	
Griffin MS - Fire Safety - Sprinkler System	**50**	**2015**	84	84	18%	**99**	
Griffin MS - Food Service Boilers	**20**	**2015**	60	60		**60**	
Griffin MS - Food Service Freezers	**20**	**2015**	60	60		**60**	
Griffin MS - Generator	**40**	**2015**	80	80		**80**	**Kohler - Diesel; 350 KW**
Griffin MS - Flooring - Classrooms	**20**	**2015**	60	20		**40**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Corridors	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Library	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
Griffin MS - Flooring - Cafeteria	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Kitchen	**50**	**2015**	84	84		**84**	**Terrazzo**
Griffin MS - Flooring - Band	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Choir	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Orchestra	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Plastic Laminate	**40**	**2015**	80	80		**80**	
Griffin MS - Doors	**20**	**2015**	60	60		**60**	**Dark**
Griffin MS - Door Hardware	**20**	**2015**	60	60		**60**	
Griffin MS - Casework (Built-Ins)	**20**	**2015**	60	60		**60**	
Griffin MS - Restrooms - Faculty	**20**	**2015**	60	60		**60**	
Griffin MS - Restrooms - Student	**20**	**2015**	60	60		**60**	
Griffin MS - Marquee	**15**	**2015**	47	47		**47**	**LED; Digital**
Griffin MS - Paving - Parking Lots	**50**	**2015**	84	84		**84**	
Griffin MS - Paving - Sidewalks	**40**	**2015**	80	75		**78**	**some shifting**
Griffin MS - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
Griffin MS - Paint - Commons	**15**	**2015**	47	47		**47**	**Door Jams throughout the building painted in 2018**
Griffin MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	
Griffin MS - Paint - Gyms	**20**	**2015**	60	60		**60**	
Griffin MS - Paint - Exterior	**20**	**2015**	60	60		**60**	
Griffin MS - Paint - Hallways	**20**	**2015**	60	60		**60**	
Sports and Fine Arts							
Griffin MS - Perf Arts - Curtains	**20**	**2015**	60	60		**60**	
Griffin MS - Perf Arts - Cafetorium Lighting	**25**	**2015**	68	68		**68**	
Griffin MS - Asphalt Track	**20**	**2015**	60	60		**60**	**Lines repainted in 2020**
Griffin MS - Field Lights	**30**	**2015**	73	73		**73**	
Griffin - Stadium Scoreboard	**18**	**2015**	56	56		**56**	
Griffin - Lightning Detection		**2023**					**Tracking Only - Maintained by Athletics**
Griffin MS - Bleachers - Exterior	**40**	**2015**	80	80		**80**	
Griffin MS - Bleachers - Interior	**30**	**2015**	73	73		**73**	
Griffin MS - Gym Main - Flooring	**40**	**2015**	80	80		**80**	
Griffin MS - Gym Aux - Flooring	**40**	**2015**	80	80		**80**	
Griffin MS - Athletic Lockers	**40**	**2015**	80	80		**80**	
Griffin MS - Athletic Benches	**50**	**2015**	84	84		**84**	**Concrete**
Griffin MS - Athletic Partitions	**20**	**2015**	60	60		**60**	**Tile walls with FRP door**
Griffin MS - Weight Room Floor	**20**	**2015**	60	60		**60**	**Rubber**

Hedrick MS

Year Built / Age 2020 / 3

Campus Square Footage 176,047

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2020**	**94**				
Hedrick MS - Foundation	**50**	**2020**	94	94		**94**	
Hedrick MS - HVAC	**20**	**2020**	85	85	13%	**96**	**Aaon**
Hedrick MS - HVAC - Controls	**20**	**2020**	85	85		**85**	**Alerton**
Hedrick MS - Ceiling and Lights	**20**	**2020**	85	85		**85**	**LED**
Hedrick MS - Roof - Flat	**20**	**2020**	85	85	19%	**100**	**Mod bit**
Hedrick MS - Electrical Switchgear	**30**	**2020**	90	90	16%	**100**	**Square D**
Hedrick MS - Elevator	**25**	**2020**	88	88	20%	**100**	**Otis**
Hedrick MS - Fire Safety - Fire Alarm	**20**	**2020**	85	85	4%	**88**	**EST 3 Voice Evac**
Hedrick MS - Fire Safety - ERRS		**2020**				**-**	**Tracking only**
Hedrick MS - Fire Safety - Sprinkler System	**50**	**2020**	94	94	19%	**94**	
Hedrick MS - Storm Shelter	**50**	**2020**	94	94		**94**	
Hedrick MS - Food Service Boilers	**20**	**2020**	85	85		**85**	
Hedrick MS - Food Service Freezers	**20**	**2020**	85	85		**85**	
Hedrick MS - Generator	**40**	**2020**	93	60		**76**	**Cummins - Diesel; 200 kw; issues**
Hedrick MS - Flooring - Classrooms	**20**	**2020**	85	85		**85**	**LVT**
Hedrick MS - Flooring - Corridors	**30**	**2020**	90	90		**90**	**Concrete**
Hedrick MS - Flooring - Library	**15**	**2020**	80	80		**80**	**Carpet**
Hedrick MS - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
Hedrick MS - Flooring - Cafeteria	**30**	**2020**	90	90		**90**	**Concrete**
Hedrick MS - Flooring - Kitchen	**20**	**2020**	85	85		**85**	**Epoxy**
Hedrick MS - Flooring - Band	**20**	**2020**	85	85		**85**	**LVT**
Hedrick MS - Flooring - Choir	**20**	**2020**	85	85		**85**	**LVT**
Hedrick MS - Flooring - Orchestra	**20**	**2020**	85	85		**85**	**LVT**
Hedrick MS - Plastic Laminate	**40**	**2020**	93	93		**93**	
Hedrick MS - Doors	**20**	**2020**	85	85		**85**	**issues with storm doors**
Hedrick MS - Door Hardware	**20**	**2020**	85	85		**85**	
Hedrick MS - Casework (Built-Ins)	**20**	**2020**	85	85		**85**	**Laminate/Solid Surface Tops**
Hedrick MS - Restrooms - Faculty	**20**	**2020**	85	85		**85**	
Hedrick MS - Restrooms - Student	**20**	**2020**	85	85		**85**	
Hedrick MS - Marquee	**15**	**2020**	80	80		**80**	**Digital**
Hedrick MS - Paving - Parking Lots	**50**	**2020**	94	94		**94**	
Hedrick MS - Paving - Sidewalks	**40**	**2020**	93	93		**93**	
Hedrick MS - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
Hedrick MS - Paint - Commons	**15**	**2020**	80	80		**80**	
Hedrick MS - Paint - Cafeteria	**15**	**2020**	80	80		**80**	
Hedrick MS - Paint - Gyms	**20**	**2020**	85	85		**85**	
Hedrick MS - Paint - Exterior	**20**	**2020**	85	85		**85**	
Hedrick MS - Paint - Hallways	**20**	**2020**	85	85		**85**	
Sports and Fine Arts							
Hedrick MS - Perf Arts - Curtains	**20**	**2020**	85	85		**85**	
Hedrick MS - Perf Arts - Cafetorium Lighting	**25**	**2020**	88	88		**88**	**LED**
Hedrick MS - Asphalt Track	**20**	**2020**	85	85		**85**	
Hedrick MS - Bleachers - Interior	**30**	**2020**	90	90		**90**	
Hedrick MS - Gym Main - Flooring	**40**	**2020**	93	93		**93**	
Hedrick MS - Gym Aux - Flooring	**40**	**2020**	93	93		**93**	
Hedrick MS - Athletic Lockers	**40**	**2020**	93	93		**93**	
Hedrick MS - Athletic Benches	**50**	**2020**	94	94		**94**	**concrete**
Hedrick MS - Athletic Partitions	**20**	**2020**	85	85		**85**	
WEIGHT ROOM							
Hedrick MS - Weight Room Flooring	**20**	**2020**	85	85		**85**	**Rubber**

Huffines MS

Year Built / Age 1997 / 26

Campus Square Footage 125,186

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1997**	**48**				
Huffines MS - HVAC	**20**	**2015**	60	60	9%	**66**	**RTU & VRF**
Huffines MS - HVAC - 2022 Fine Art Addition	**20**	**2021**	90	90		**90**	
Huffines MS - HVAC - Controls	**20**	**2015**	60	60		**60**	**Controls = Alerton**
Huffines MS - Ceiling and Lights	**20**	**2015**	60	60		**60**	
Huffines MS - Ceiling and Lights - 2022 Fine Art Addition	**20**	**2021**	90	90		**90**	**LED**
Huffines MS - Roof - Flat	**20**	**2015**	60	60	1%	**61**	**Mod Bit**
Huffines MS - Roof - Standing Seam	**30**	**2015**	73	73	1%	**74**	
Huffines MS - Roof - Flat - 2022 Fine Art Addition	**20**	**2021**	90	90		**90**	
Huffines MS - Roof - Flat - 2022 Fine Art Addition	**20**	**2021**	90	90		**90**	
Huffines MS - Electrical Switchgear	**30**	**1997**	13	13	-3%	**13**	
Huffines MS - Elevator	**25**	**1997**	-4	5	-26%	**1**	**Schindler**
Huffines MS - Fire Safety - Fire Alarm	**20**	**2015**	60	60	-1%	**59**	**EST 3**
Huffines MS - Fire Safety - ERRS	**-**					**-**	
Huffines MS - Fire Safety - Sprinkler System	**50**	**1997**	48	45	-50%	**23**	
Huffines MS - Food Service Boilers	**20**	**2017**	70	70		**70**	
Huffines MS - Food Service Freezers	**20**	**2015**	60	60		**60**	
Huffines MS - Generator	**40**	**2015**	80	80		**80**	**Cummins - Diesel; 200 KW**
Huffines MS - Flooring - Classrooms	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Corridors	**20**	**2015**	60	20		**40**	**VCT; float loose**
Huffines MS - Flooring - Library	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Cafeteria	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Kitchen	**50**	**1997**	48	48		**48**	**Terrazzo**
Huffines MS - Flooring - Band	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Choir	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Orchestra	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	**VCT**
Huffines MS - Plastic Laminate	**40**	**2015**	80	80		**80**	
Huffines MS - Doors	**20**	**2015**	60	60		**60**	**Dark**
Huffines MS - Door Hardware	**20**	**2015**	60	60		**60**	
Huffines MS - Casework (Built-Ins)	**20**	**2015**	60	60		**60**	**Wet areas and countertops replaced 2015**
Huffines MS - Restrooms - Faculty	**20**	**2015**	60	60		**60**	
Huffines MS - Restrooms - Student	**20**	**2015**	60	60		**60**	
Huffines MS - Marquee	**15**	**2019**	73	73		**73**	**Digital**
Huffines MS - Paving - Parking Lots	**50**	**1997**	48	48		**48**	
Huffines MS - Paving - Sidewalks	**40**	**1997**	35	30		**33**	**Pavement drop at door #3**
Huffines MS - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
Huffines MS - Paint - Commons	**15**	**2015**	47	47		**47**	**Handrails throughout 2018**
Huffines MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	**2018 lower walls**
Huffines MS - Paint - Gyms	**20**	**2015**	60	60		**60**	**2018 maintain lower walls**
Huffines MS - Paint - Exterior	**20**	**2015**	60	60		**60**	
Huffines MS - Paint - Hallways	**20**	**2015**	60	60		**60**	
Sports and Fine Arts							
Huffines MS - Perf Arts - Curtains	**-**					**-**	
Huffines MS - Perf Arts - Cafetorium Lighting	**25**	**2015**	68	68		**68**	
Huffines MS - Asphalt Track	**20**	**2021**	90	90		**90**	
Huffines MS - Field Lights	**-**					**-**	
Huffines MS - Bleachers - Exterior	**-**					**-**	
Huffines MS - Bleachers - Interior	**30**	**1997**	13	13		**13**	**added aisles and railings 2022**
Huffines MS - Gym Main - Flooring	**40**	**2016**	83	83		**83**	**Replaced in 2016**
Huffines MS - Gym Aux - Flooring	**40**	**1997**	35	35		**35**	
Huffines MS - Athletic Lockers	**40**	**1997**	35	35		**35**	
Huffines MS - Athletic Benches	**50**	**2015**	84	84		**84**	**Concrete**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Huffines MS - Athletic Partitions	**20**	**2015**	60	60		**60**	**Solid Plastic**
WEIGHT ROOM 2008							
Huffines MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Huffines MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Huffines MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber**

Killian MS

Year Built / Age 2007 / 16

Campus Square Footage 180,481

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2007**	**68**				
Killian MS - HVAC	**20**	**2007**	20	25	-8%	**21**	**CHILLER**
Killian MS - HVAC - Controls	**20**	**2007**	20	20		**20**	**Controls = Alerton**
Killian MS - Ceiling and Lights	**20**	**2007**	20	20		**20**	
Killian MS - Roof - Flat	**20**	**2007**	20	20	-2%	**20**	**Kitchen**
Killian MS - Roof - Standing Seam	**30**	**2007**	47	47	-2%	**46**	
Killian MS - Electrical Switchgear	**30**	**2007**	47	47	3%	**48**	
Killian MS - Elevator	**25**	**2007**	36	30	-19%	**27**	**Thyssen Krupp**
Killian MS - Fire Safety - Fire Alarm	**20**	**2007**	20	20	10%	**22**	**Edwards EST 3**
Killian MS - Fire Safety - ERRS	-					-	
Killian MS - Fire Safety - Sprinkler System	**50**	**2007**	68	68	17%	**80**	
Killian MS - Food Service Boilers	**20**	**2007**	20	20		**20**	
Killian MS - Food Service Freezers	**20**	**2007**	20	25		**23**	**walk in cooler coil 2022**
Killian MS - Generator	**40**	**2007**	60	60		**60**	**Olympian - Diesel; 150 KW**
Killian MS - Flooring - Classrooms	**20**	**2007**	20	20		**20**	**VCT**
Killian MS - Flooring - Corridors	**20**	**2007**	20	20		**20**	**VCT**
Killian MS - Flooring - Library	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Flooring - Offices	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Flooring - Cafeteria	**20**	**2007**	20	20		**20**	**VCT**
Killian MS - Flooring - Kitchen	**50**	**2007**	68	68		**68**	**Terrazzo**
Killian MS - Flooring - Band	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Flooring - Choir	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Flooring - Orchestra	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Plastic Laminate	**40**	**2007**	60	60		**60**	
Killian MS - Doors	**20**	**2007**	20	20		**20**	
Killian MS - Door Hardware	**20**	**2007**	20	20		**20**	
Killian MS - Casework (Built-Ins)	**20**	**2007**	20	20		**20**	
Killian MS - Restrooms - Faculty	**20**	**2007**	20	20		**20**	
Killian MS - Restrooms - Student	**20**	**2007**	20	20		**20**	**Block walls**
Killian MS - Marquee	**30**	**2007**	47	47		**47**	**Brick**
Killian MS - Marquee	**15**	**2010**	13	13		**13**	**LED Digital**
Killian MS - Paving - Parking Lots	**50**	**2007**	68	60		**64**	**Showing signs of some movement**
Killian MS - Paving - Sidewalks	**40**	**2007**	60	60		**60**	**Showing signs of movement; some pavers**
Killian MS - Exterior Lighting	**20**	**2007**	20	20		**20**	**Pole lights LED 2021 bulbs**
Killian MS - Paint - Commons	**15**	**2007**	-7	5		**-1**	**Boys/Girls athletics all - 2018**
Killian MS - Paint - Cafeteria	**15**	**2007**	-7	5		**-1**	
Killian MS - Paint - Gyms	**20**	**2021**	90	90		**90**	
Killian MS - Paint - Exterior	**20**	**2007**	20	20		**20**	
Killian MS - Paint - Hallways	**20**	**2007**	20	20		**20**	
Sports and Fine Arts							
Killian MS - Perf Arts - Curtains	**20**	**2007**	20	20		**20**	
Killian MS - Perf Arts - Stage Lighting	**25**	**2007**	36	36		**36**	
Killian MS - Asphalt Track	**20**	**2007**	20	20		**20**	**Concrete curbing, some cracking however in good shape given age. 2 shade structures added next to track 2019.**
Killian MS - Field Lights	-					-	
Killian MS - Bleachers - Exterior	-					-	
Killian MS - Bleachers - Interior	**30**	**2007**	47	47		**47**	
Killian MS - Gym Main - Flooring	**40**	**2007**	60	60		**60**	**Sanded and Refinished 2021**
Killian MS - Gym Aux - Flooring	**40**	**2007**	60	60		**60**	**Sanded and Refinished 2021**
Killian MS - Athletic Lockers	**40**	**2007**	60	60		**60**	
Killian MS - Athletic Benches	**20**	**2007**	20	25		**23**	**Plastic Wood Lumber**
Killian MS - Athletic Partitions	**20**	**2007**	20	20		**20**	**CMU**
WEIGHT ROOM 2008							
Killian MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Killian MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Killian MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber**

Lakeview MS

Year Built / Age 1989 / 34

Campus Square Footage 131,470

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1989**	**32**				
Lakeview MS - HVAC	**20**	**2007**	20	20	-13%	**17**	**RTU**
Lakeview MS - HVAC - 2008 Fine Art Addition	**20**	**2008**	25	25	-13%	**22**	**RTU**
Lakeview MS - HVAC - Controls	**20**	**2007**	20	20		**20**	**Controls = Alerton**
Lakeview MS - Ceiling and Lights	**20**	**2007**	20	15		**18**	
Lakeview MS - Roof - Flat	**20**	**2007**	20	20	-13%	**17**	**Mod Bit**
Lakeview MS - Roof Skylights	**25**	**2015**	68	68		**68**	
Lakeview MS - 2008 Fine Art Addition	**20**	**2007**	20	20	0%	**20**	**4 ply built up**
Lakeview MS - Electrical Switchgear	**30**	**2022**	97	97		**97**	
Lakeview MS - Elevator	**25**	**1998**	0	10	11%	**6**	**MCE - Installed 1989 & altered in 1998**
Lakeview MS - Fire Safety - Fire Alarm	**20**	**1999**	-20	0	-5%	**-10**	**New panel 2016 / original devices; Napco MS-52**
Lakeview MS - Fire Safety - ERRS	**-**					**-**	
Lakeview MS - Fire Safety - Sprinkler System	**50**	**1989**	32	32	7%	**34**	
Lakeview MS - Food Service Boilers	**20**	**2011**	40	40		**40**	
Lakeview MS - Food Service Freezers	**20**	**2007**	20	20		**20**	
Lakeview MS - Generator	**-**					**-**	
Lakeview MS - Flooring - Classrooms	**20**	**2019**	80	80		**80**	**VCT**
Lakeview MS - Flooring - Corridors	**20**	**2004**	5	5		**5**	**VCT**
Lakeview MS - Flooring - Library	**20**	**2019**	80	80		**80**	**LVT**
Lakeview MS - Flooring - Offices	**20**	**2020**	85	85		**85**	**LVT and carpet**
Lakeview MS - Flooring - Cafeteria	**20**	**2013**	50	50		**50**	**LVT**
Lakeview MS - Flooring - Kitchen	**50**	**1989**	32	32		**32**	**Terrazzo**
Lakeview MS - Flooring - Band	**20**	**2019**	80	80		**80**	**VCT**
Lakeview MS - Flooring - Choir	**20**	**2019**	80	80		**80**	**VCT**
Lakeview MS - Flooring - Orchestra	**15**	**2004**	-27	0		**-13**	**Carpet**
Lakeview MS - Plastic Laminate	**40**	**2007**	60	60		**60**	
Lakeview MS - Doors	**20**	**1989**	-70	0		**-35**	**Laminated white oak**
Lakeview MS - Door Hardware	**20**	**1989**	-70	0		**-35**	
Lakeview MS - Casework (Built-Ins)	**20**	**1989**	-70	0		**-35**	
Lakeview MS - Restrooms - Faculty	**20**	**2018**	75	75		**75**	
Lakeview MS - Restrooms - Student	**20**	**2018**	75	75		**75**	
Lakeview MS - Marquee	**15**	**2018**	67	67		**67**	**LED; Digital**
Lakeview MS - Paving - Parking - Concrete	**50**	**1989**	32	32		**32**	
Lakeview MS - Paving - Parking - Asphalt overlay	**20**	**2004**	5	5		**5**	
Lakeview MS - Paving - Sidewalks	**40**	**1989**	15	15		**15**	
Lakeview MS - Exterior Lighting	**20**	**2007**	20	20		**20**	**Parking LED bulbs only 2021**
Lakeview MS - Paint - Commons	**15**	**2016**	53	53		**53**	
Lakeview MS - Paint - Cafeteria	**15**	**2016**	53	53		**53**	
Lakeview MS - Paint - Gyms	**20**	**2016**	65	65		**65**	
Lakeview MS - Paint - Exterior	**20**	**2007**	20	20		**20**	**2017 All doors and rails new; exterior painted 2021; Front Entrance cleaned & painted 2022**
Lakeview MS - Paint - Hallways	**20**	**2018**	75	75		**75**	**2017 Bond**
Sports and Fine Arts							
Lakeview MS - Perf Arts - Curtains	**-**					**-**	
Lakeview MS - Perf Arts - Cafetorium Lighting	**25**	**1989**	-36	0		**-18**	
Lakeview MS - Asphalt Track	**20**	**2021**	90	80		**85**	**Needs repairs to one end due to soil**
Lakeview MS - Field Lights	**-**					**-**	
Lakeview MS - Bleachers - Exterior	**-**					**-**	
Lakeview MS - Bleachers - Interior	**30**	**1989**	-13	0		**-7**	**Wooden**
Lakeview MS - Gym Main - Flooring	**40**	**1989**	15	15		**15**	**2018 resurfaced and painted (2nd sanding)**
Lakeview MS - Gym Aux - Flooring	**40**	**1989**	15	15		**15**	**2019 resurfaced and painted (2nd sanding)**
Lakeview MS - Athletic Lockers	**40**	**1989**	15	15		**15**	**Painted 3-5 years ago**
Lakeview MS - Athletic Benches	**20**	**1989**	-70	0		**-35**	**Wood Bench**
Lakeview MS - Athletic Partitions	**20**	**2013**	50	50		**50**	**Tile walls and FRP doors**
WEIGHT ROOM 2008							
Lakeview MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Lakeview MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Lakeview MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber**

Lamar MS

Year Built / Age 1987 / 36

Campus Square Footage 139,927

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1987**	**28**				
Lamar MS - HVAC	**20**	**2009**	30	30	4%	**31**	**RTU**
Lamar MS - HVAC - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	
Lamar MS - HVAC - Controls	**20**	**2009**	30	30		**30**	**Controls = Alerton**
Lamar MS - Ceiling and Lights	**20**	**2009**	30	25		**28**	**T-5**
Lamar MS - Ceiling and Lights - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	
Lamar MS - Roof - Flat	**20**	**2001**	-10	5	-2%	**-3**	
Lamar MS - Roof - Flat - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	
Lamar MS - Electrical Switchgear	**30**	**2021**	93	93		**93**	
Lamar MS - Fire Safety - Fire Alarm	**20**	**2003**	0	5	10%	**3**	**Edwards EST 2 - Limited Parts**
Lamar MS - Fire Safety - ERRS	**-**					**-**	
Lamar MS - Fire Safety - Sprinkler System	**50**	**2009**	72	72	15%	**83**	
Lamar MS - Storm Shelter - 2022 Fine Arts Addition	**50**	**2022**					
Lamar MS - Food Service Boilers	**20**	**2018**	75	75		**75**	
Lamar MS - Food Service Freezers	**20**	**2009**	30	30		**30**	
Lamar MS - Generator	**40**	**2023**	100	100		**100**	**Generac - Diesel; 100 KW**
Lamar MS - Flooring - Classrooms	**15**	**2021**	87	87		**87**	
Lamar MS - Flooring - Corridors	**20**	**2011**	40	40		**40**	**VCT**
Lamar MS - Flooring - Library	**20**	**2014**	55	55		**55**	**VCT**
Lamar MS - Flooring - Offices	**15**	**2021**	87	87		**87**	**VCT and carpet**
Lamar MS - Flooring - Cafeteria	**20**	**2011**	40	40		**40**	**VCT**
Lamar MS - Flooring - Kitchen	**30**	**1987**	-20	0		**-10**	**Ceramic tile: 8x8, cmu painted walls**
Lamar MS - Flooring - Band	**20**	**2012**	45	45		**45**	**VCT**
Lamar MS - Flooring - Choir	**20**	**2012**	45	45		**45**	**VCT**
Lamar MS - Flooring - Orchestra	**20**	**2012**	45	45		**45**	**VCT**
Lamar MS - Flooring - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	**VCT**
Lamar MS - Plastic Laminate	**40**	**2009**	65	65		**65**	
Lamar MS - Doors	**20**	**1987**	-80	0		**-40**	**Medium**
Lamar MS - Door Hardware	**20**	**1987**	-80	0		**-40**	
Lamar MS - Casework (Built-Ins)	**20**	**1987**	-80	0		**-40**	
Lamar MS - Restrooms - Faculty	**20**	**2009**	30	30		**30**	
Lamar MS - Restrooms - Student	**20**	**2009**	30	30		**30**	**Floor tile: 2x2, cmu painted walls, solid plastic partitions, wall mounted urinals.**
Lamar MS - Marquee	**30**	**1987**	-20	0		**-10**	**Original on post**
Lamar MS - Paving - Parking - Concrete	**50**	**1987**	28	28		**28**	**Repairs have been made; front parking lot repairs 8/2021**
Lamar MS - Paving - Sidewalks	**40**	**1987**	10	15		**13**	**Spider cracking in front, right.**
Lamar MS - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
Lamar MS - Paint - Commons	**15**	**2021**	87	87		**87**	
Lamar MS - Paint - Cafeteria	**15**	**2020**	80	80		**80**	
Lamar MS - Paint - Gyms	**20**	**2020**	85	85		**85**	
Lamar MS - Paint - Exterior	**20**	**2001**	-10	5		**-3**	**Lower Walls; New exterior doors and rails 2016**
Lamar MS - Paint - Hallways	**20**	**2020**	85	85		**85**	**P-Lam 7'**
Sports and Fine Arts							
Lamar MS - Perf Arts - Curtains	**20**	**2016**	65	65		**65**	
Lamar MS - Perf Arts - Cafetorium Lighting	**25**	**2018**	80	80		**80**	
Lamar MS - Asphalt Track	**20**	**2007**	20	15		**18**	**Falling on sides; large cracks; 2019 major repairs to cracks & sealed the track & painted new lanes; needs some work**
Lamar MS - Field Lights	**-**					**-**	
Lamar MS - Bleachers - Exterior	**-**					**-**	
Lamar MS - Bleachers - Interior	**30**	**2008**	50	50		**50**	**Reverse Fold**
Lamar MS - Gym Main - Flooring	**40**	**1987**	10	10		**10**	**Refinish 2023**
Lamar MS - Gym Aux - Flooring	**40**	**1987**	10	10		**10**	**Refinish 2023**
Lamar MS - Athletic Lockers	**40**	**1987**	10	15		**13**	
Lamar MS - Athletic Benches	**20**	**1987**	-80	0		**-40**	**Painted wood**
Lamar MS - Athletic Partitions	**20**	**2009**	30	30		**30**	**Solid plastic**
WEIGHT ROOM 2008							
Lamar MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	**1 unit replaced Spring 2020**
Lamar MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Lamar MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber**

McKamy MS

Year Built / Age 1997 / 26

Campus Square Footage 128,675

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1997**	**48**				
McKamy MS - HVAC - Original	**20**	**2015**	60	55	5%	**60**	**RTU & VRF**
McKamy MS - HVAC - 2008 - Addition	**20**	**2008**	25	25	5%	**26**	**Weight Room; RTU**
McKamy MS - HVAC - Controls	**20**	**2015**	60	60		**60**	**Controls = Alerton**
McKamy MS - Ceiling and Lights - Original	**20**	**2015**	60	60		**60**	**LED**
McKamy MS - Ceiling and Lights - 2008 - Addition	**20**	**2008**	25	25		**25**	**T-5**
McKamy MS - Roof - Flat	**20**	**2015**	60	55	-8%	**53**	**Leak Warranty Repair**
McKamy MS - Roof - Standing Seam	**20**	**2015**	60	60	-8%	**55**	
McKamy MS - Roof - 2008 Addition	**20**	**2008**	25	25	-8%	**23**	
McKamy MS - Electrical Switchgear	**30**	**1997**	13	13	-29%	**9**	**Siemens**
McKamy MS - Elevator	**25**	**1997**	-4	5	-12%	**1**	**Schindler**
McKamy MS - Fire Safety - Fire Alarm	**20**	**2015**	60	60	-50%	**30**	**Edwards EST 3 - Voice activated**
McKamy MS - Fire Safety - ERRS	-					-	
McKamy MS - Fire Safety - Sprinkler System	**50**	**1997**	48	48	5%	**50**	
McKamy MS - Food Service Boilers	**20**	**2020**	85	85		**85**	**Tankless 2020**
McKamy MS - Food Service Freezers	**20**	**2015**	60	60		**60**	
McKamy MS - Generator	**40**	**2015**	80	80		**80**	**Cummins - Diesel; 200 KW**
McKamy MS - Lift Station	**20**	**2015**	60	60		**60**	**2,000 Gallon on Generator**
McKamy MS - Flooring - Classrooms	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Corridors	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Library	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Cafeteria	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Kitchen	**50**	**1997**	48	35		**42**	**Terrazzo - cracked**
McKamy MS - Flooring - Band - Original	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Band - 2008	**15**	**2008**	0	5		**3**	**Carpet**
McKamy MS - Flooring - Choir	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Orchestra	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Plastic Laminate	**40**	**1997**	35	35		**35**	
McKamy MS - Doors	**20**	**2015**	60	60		**60**	**Dark**
McKamy MS - Door Hardware	**20**	**2015**	60	60		**60**	
McKamy MS - Casework (Built-Ins)	**20**	**2015**	60	60		**60**	**2015 Refresh replaced areas needing repair**
McKamy MS - Restrooms - Faculty	**20**	**2015**	60	60		**60**	
McKamy MS - Restrooms - Student	**20**	**2015**	60	60		**60**	
McKamy MS - Marquee	**30**	**1997**	13	20		**17**	**LED conversion 2021; new brick 2022**
McKamy MS - Paving - Parking Lots	**50**	**1997**	48	48		**48**	
McKamy MS - Paving - Sidewalks	**40**	**1997**	35	35		**35**	
McKamy MS - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
McKamy MS - Paint - Commons	**15**	**2015**	47	47		**47**	**good/clean**
McKamy MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	**good/clean - maintaing lower walls**
McKamy MS - Paint - Gyms	**20**	**2015**	60	60		**60**	
McKamy MS - Paint - Exterior	**20**	**2015**	60	60		**60**	
McKamy MS - Paint - Hallways	**20**	**2015**	60	60		**60**	**good shape - continue to paint as needed.**
Sports and Fine Arts							
McKamy MS - Perf Arts - Curtains	-					-	
McKamy MS - Perf Arts - Cafetorium Lighting	**25**	**2017**	76	65		**71**	**No support; LED**
McKamy MS - Asphalt Track	**20**	**2021**	90	90		**90**	
McKamy MS - Field Lights	**30**	**2003**	33	33		**33**	**not used**
McKamy MS - Bleachers - Exterior	-					-	
McKamy MS - Bleachers - Interior	**30**	**1997**	13	13		**13**	**showing age; added aisles and railings 2019**
McKamy MS - Gym Main - Flooring	**40**	**1997**	35	35		**35**	**2nd sanding 2015**
McKamy MS - Gym Aux - Flooring	**40**	**1997**	35	35		**35**	**2nd sanding 2015**
McKamy MS - Athletic Lockers	**40**	**1997**	35	35		**35**	**2015 outside painted**
McKamy MS - Athletic Benches	**50**	**2015**	84	84		**84**	**Concrete**
McKamy MS - Athletic Partitions	**20**	**2015**	60	60		**60**	**CMU**
McKamy MS - Weight Room Floor	**20**	**2008**	25	25		**25**	**Rubber**

Shadow Ridge MS

Year Built / Age 2005 / 18

Campus Square Footage 153,664

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2005**	**64**				
Shadow Ridge MS - HVAC	**20**	**2005**	10	10	-26%	**7**	**CHILLER**
Shadow Ridge MS - HVAC - Controls	**20**	**2018**	75	75		**75**	**2008 Bond - Enviromatic**
Shadow Ridge MS - Ceiling and Lights	**20**	**2005**	10	10		**10**	**Main Hall LED 2017-18**
Shadow Ridge MS - Roof - Flat	**20**	**2005**	10	5	-10%	**7**	**Over kitchen**
Shadow Ridge MS - Roof - Metal	**30**	**2005**	40	5	-10%	**20**	**Leaks in gym**
Shadow Ridge MS - Electrical Switchgear	**30**	**2005**	40	40	-2%	**39**	**Cuttler Hammer**
Shadow Ridge MS - Elevator A (Main)	**25**	**2005**	28	28	3%	**29**	**Schindler**
Shadow Ridge MS - Lift (Press Box)	**-**					**-**	**Removed 7/2019**
Shadow Ridge MS - Fire Safety - Fire Alarm	**20**	**2005**	10	10	11%	**11**	**Edwards EST 2 - Limited Parts**
Shadow Ridge MS - Fire Safety - ERRS	**-**					**-**	
Shadow Ridge MS - Fire Safety - Sprinkler System	**50**	**2005**	64	64	14%	**73**	
Shadow Ridge MS - Food Service Boilers	**20**	**2005**	10	10		**10**	**Tank 2005; Anode Rod 2017**
Shadow Ridge MS - Food Service Freezers	**20**	**2005**	10	10		**10**	**Replaced floor 2018**
Shadow Ridge MS - Generator	**40**	**2005**	55	55		**55**	**Generac - Diesel; 80 KW**
Shadow Ridge MS - Flooring - Classrooms	**20**	**2005**	10	10		**10**	**VCT**
Shadow Ridge MS - Flooring - Corridors	**20**	**2005**	10	10		**10**	**VCT - floor cracking between Library & Gym**
Shadow Ridge MS - Flooring - Library	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Shadow Ridge MS - Flooring - Kitchen	**50**	**2005**	64	64		**64**	**Terrazzo - repaired 2017**
Shadow Ridge MS - Flooring - Band	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Flooring - Choir	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Flooring - Orchestra	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Plastic Laminate	**30**	**2005**	40	40		**40**	
Shadow Ridge MS - Doors	**20**	**2005**	10	10		**10**	**Light White Oak**
Shadow Ridge MS - Door Hardware	**20**	**2005**	10	10		**10**	
Shadow Ridge MS - Casework (Built-Ins)	**20**	**2005**	10	10		**10**	
Shadow Ridge MS - Restrooms - Faculty	**20**	**2005**	10	10		**10**	
Shadow Ridge MS - Restrooms - Student	**20**	**2005**	10	15		**13**	**CMU glazed solid doors**
Shadow Ridge MS - Marquee	**30**	**2005**	40	40		**40**	**LED conversion Summer 2021**
Shadow Ridge MS - Paving - Parking Lots	**50**	**2005**	64	45		**55**	**Spider cracks,**
Shadow Ridge MS - Paving - Sidewalks	**40**	**2005**	55	40		**48**	**Front & Back Brick pavers heaved; some repaired 2021 & 2022**
Shadow Ridge MS - Exterior Lighting	**20**	**2005**	10	10		**10**	**Front is LED (2015/16).**
Shadow Ridge MS - Paint - Commons	**15**	**2005**	-20	10		**-5**	**good/clean - maintaining as needed**
Shadow Ridge MS - Paint - Cafeteria	**15**	**2005**	-20	10		**-5**	**good/clean - maintaining as needed**
Shadow Ridge MS - Paint - Gyms	**20**	**2005**	10	10		**10**	**Door Frames need painting; back gym halls painted 2017; Gym lower walls painted 2018**
Shadow Ridge MS - Paint - Exterior	**20**	**2005**	10	10		**10**	**Lower walls 2014**
Shadow Ridge MS - Paint - Hallways	**20**	**2005**	10	10		**10**	**Back stairwells painted May 2017; Lower walls 2014**
Sports and Fine Arts							
Shadow Ridge MS - Perf Arts - Curtains	**20**	**2005**	10	10		**10**	
Shadow Ridge MS - Perf Arts - Cafetorium Lighting	**25**	**2005**	28	20		**24**	
Shadow Ridge MS - Asphalt Track	**20**	**2005**	10	10		**10**	**South end repaired w/concrete support, repaved and repainted 2021; bad soil causing movement**
Shadow Ridge MS - Field Lights	**30**	**2005**	40	40		**40**	
Shadow Ridge - Stadium Scoreboard	**18**	**2020**	83	83		**83**	**Replaced due to past storm damage**
Shadow Ridge - Lightning Detection		**2023**					**Tracking Only - Maintained by Athletics**
Shadow Ridge MS - Bleachers - Exterior	**40**	**2005**	55	55		**55**	
Shadow Ridge MS - Bleachers - Interior	**30**	**2005**	40	40		**40**	**Replaced some seats; castors replaced 2019**
Shadow Ridge MS - Gym Main - Flooring	**40**	**2005**	55	55		**55**	**2020 Sanded and refinished**
Shadow Ridge MS - Gym Aux - Flooring	**40**	**2005**	55	55		**55**	**2020 Sanded and refinished**
Shadow Ridge MS - Athletic Lockers	**40**	**2005**	55	55		**55**	
Shadow Ridge MS - Athletic Benches	**20**	**2005**	10	10		**10**	**Plastic/Wood Composite**
Shadow Ridge MS - Athletic Partitions	**20**	**2005**	10	10		**10**	**Ceramic Tile**
WEIGHT ROOM 2008							
Shadow Ridge MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Shadow Ridge MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Shadow Ridge MS - Weight Room Flooring	**20**	**2008**	25	20		**23**	**Rubber**

ASSESSMENT SUMMARY

HIGH SCHOOLS

Current Year 2023

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
YEAR BUILT	2014	2010	2011	2005	2014	1999	1999	2012	1981	1986
Age	9	13	12	18	9	24	24	11	42	37
HVAC - Original	62	34	40	8	54	90	88	24	10	9
HVAC - Addition	-	-	-	-	-	2	2	24	-8	9
HVAC - Addition	-	-	-	-	-	27	26	43	22	9
HVAC - Addition	-	-	-	-	-	60	-	53	54	3
HVAC - Addition	-	-	-	-	-	-	-	-	-	5
HVAC - Fine Art Addition	-	-	-	-	-	100	95	95	-	95
HVAC - Controls	55	30	40	10	55	55	90	45	10	23
Roof - Flat - Original	41	39	46	5	100	90	90	-8	78	18
Roof - Shingled or Standing Seam	-	63	68	4	-	-	-	-	-	-
Roof - Addition	-	-	-	-	-	0	0	24	78	-8
Roof - Addition	-	-	-	-	-	28	30	43	78	-8
Roof - Addition	-	-	-	-	-	63	-	52	78	-4
Roof - Addition	-	-	-	-	-	-	-	-	78	0
Roof - Addition	-	-	-	-	-	-	-	-	78	13
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Fine Art Addition	-	-	-	-	-	100	95	95	-	95
Electrical Panels - Original	63	61	60	38	73	20	21	57	90	57
Electrical Panels - Additions	-	-	-	-	-	30	31	45	90	57
Electrical Panels - Additions	-	-	-	-	-	50	52	57	90	57
Electrical Panels - Additions	-	-	-	-	-	70	-	63	90	32
Electrical Panels - Additions	-	-	-	-	-	-	-	-	22	36
Electrical Panels - Additions	-	-	-	-	-	-	-	-	48	54
Electrical Panels - Additions	-	-	-	-	-	-	-	-	70	-
Electrical Panels - Fine Art Additions	-	-	-	-	-	100	97	97	-	95
Electrical Panels - Fine Art Additions	-	-	-	-	-	100	97	97	-	95
Elevator #1	31	49	62	26	31	100	100	59	56	100
Elevator #2	-	-	-	-	-	15	18	48	8	0
Elevator #3	-	-	-	-	-	71	-	8	60	-
Elevator #4	-	-	-	-	-	-	-	100	47	-
Elevator #5	-	-	-	-	-	-	-	57	-	-
Fire Safety - Fire Alarm	45	41	90	80	59	55	90	19	51	-5
Fire Safety - Sprinkler System	94	64	65	67	89	48	50	55	32	71
Fire Safety - Sprinkler System	-	-	-	-	-	54	55	73	54	-
Fire Safety - Sprinkler System	-	-	-	-	-	65	67	82	64	-
Fire Safety - Sprinkler System	-	-	-	-	-	82	-	86	70	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	82	-
Fire Safety - Sprinkler System - Fine Art Addition	-	-	-	-	-	100	98	98	-	98
Food Service Boilers	55	35	40	10	55	95	40	40	55	75
Food Service Freezers	55	35	40	10	55	90	90	45	25	25
Food Service Freezer - TCHS Cougar Cafe	-	-	-	-	-	-	-	-	-	30
Generator	78	78	70	55	78	98	95	73	-	60
Lift Station										
Flooring - Classrooms - Carpet	-	-	-	-	-	-	-	-	73	-
Flooring - Classrooms - LVT/VCT	55	35	40	10	55	90	90	45	80	85

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
Flooring - Classrooms - LVT/VCT	-	-	-	-	-	-	-	25	30	85
Flooring - Classrooms - LVT/VCT	-	-	-	-	-	-	-	-	-	85
Flooring - Classrooms - LVT/VCT	-	-	-	-	-	-	-	-	-	30
Flooring - Classrooms - LVT/VCT	-	-	-	-	-	-	-	-	-	-
Flooring - Corridors - Carpet	-	-	-	-	-	-	-	-	-	-
Flooring - Corridors - VCT	55	35	40	10	55	90	90	45	30	85
Flooring - Corridors - Stained Concrete	83	-	-	-	70	-	-	-	-	-
Flooring - Corridors - Terrazzo	82	-	-	-	-	-	-	-	-	-
Flooring - Library	83	13	20	87	70	90	85	45	23	13
Flooring - Offices	55	13	20	87	55	93	85	45	67	80
Flooring - Cafeteria	83	35	40	10	70	90	90	45	22	50
Flooring - Kitchen	82	74	76	64	82	52	52	78	22	26
Flooring - Band	-	13	20	87	-	75	25	45	45	30
Flooring - Choir	-	13	20	-	-	75	90	27	80	85
Flooring - Orchestra	-	13	20	-	-	75	90	45	45	0
Flooring - Fine Art Addition	-	-	-	-	-	100	95	95	-	95
Flooring - Fine Art Addition	-	-	-	-	-	100	95	95	-	95
Plastic Laminate	78	68	70	55	78	48	48	63	75	75
Doors	55	35	38	10	55	90	90	45	80	90
Door Hardware	55	35	40	10	55	90	90	45	80	90
Casework (Built Ins)	55	35	40	10	55	90	90	45	-55	90
Restrooms - Faculty	55	35	43	10	55	90	90	45	85	50
Restrooms - Student	55	38	43	10	55	90	90	48	45	55
Restrooms - Addition	-	-	-	-	-	90	90	3	80	50
Restrooms - Addition	-	-	-	-	-	23	25	25	-5	0
Restrooms - Addition	-	-	-	-	-	55	-	45	25	3
Restrooms - Addition	-	-	-	-	-	-	-	55	55	75
Marquee	40	60	60	93	40	70	80	40	83	53
Paving - Parking Lots	82	74	76	64	82	52	52	13	74	26
Paving - Parking Lots	-	-	-	-	-	80	72	42	80	40
Paving - Parking Lots	-	-	-	-	-	-	-	78	82	80
Paving - Sidewalks	-	-	-	-	-	-	-	-	15	-
Paving - Sidewalks	78	68	70	55	78	38	40	73	75	14
Exterior Lighting	55	90	40	10	55	50	85	45	70	80
Paint - Commons	43	13	20	73	67	87	87	28	73	33
Paint - Cafeteria	40	13	67	73	67	93	87	45	73	87
Paint - Auditorium	-	-	-	-	-	73	47	27	74	67
Paint - Activity Centers	-	-	-	-	-	43	-	27	40	-
Paint - Gyms	-	35	40	10	-	90	95	45	3	-5
Paint - Exterior	55	35	40	10	55	95	95	45	55	35
Paint - Hallways	55	35	40	10	55	95	95	43	45	55
9th /10th SPORTS & FINE ARTS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Cafetorium - Curtains	55	35	40	10	55	85	90	45	-	-
Cafetorium - Lighting	55	35	40	10	55	92	92	56	-	-
Track	-	-	-10	10	-	-	-	-	-	-
Field Lights	-	-	60	-	-	-	-	-	-	-
Bleachers - Exterior	-	-	90	-	-	-	-	-	-	-
Bleachers - Interior	-	57	60	40	-	-	-	-	-	-
HS SPORTS & FINE ARTS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Auditorium Curtains	-	-	-	-	-	95	70	55	75	75
Auditorium Stage Lighting	-	-	-	-	-	13	3	60	80	80
Auditorium Sound	-	-	-	-	-	-	-	-	-	-
Auditorium Seating	-	-	-	-	-	0	3	55	75	75
Auditorium Flooring	-	-	-	-	-	73	40	25	67	67

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
Large Gym - Flooring	-	68	70	55	-	93	40	73	63	50
Large Gym - Bleachers	-	57	60	40	-	20	20	63	53	33
Large Gym - Scoreboard	-	-	-	-	-	50	-8	45	25	-
Middle/Aux Gym - Flooring	-	68	70	55	-	73	40	73	35	10
Middle/Aux Gym - Bleachers	-	-	-	-	-	20	20	-	13	-10
Middle/Aux Gym - Scoreboard	-	-	-	-	-	-10	-8	-	65	-
Other Gym - Flooring	-	-	-	-	-	25	20	-	3	8
Other Gym - Bleachers	-	-	-	-	-	50	50	-	-18	-
Girls Locker Rooms - Flooring	-	35	40	13	-	45	25	45	25	45
Girls Locker Rooms - Benches	-	74	76	13	-	45	60	78	70	50
Girls Locker Rooms - Partitions	-	35	40	10	-	40	25	45	25	45
Boys Locker Rooms - Flooring	-	35	40	13	-	75	90	45	25	45
Boys Locker Rooms - Benches	-	74	76	13	-	90	60	78	70	50
Boys Locker Rooms - Partitions	-	35	40	10	-	90	90	45	25	45
STADIUMS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Bleachers	-	-	-	-	-	50	48	16	68	14
Artificial Turf	-	-	-	-	-	75	75	63	38	75
Synthetic Track	-	-	-	-	-	-5	5	3	50	3
PA System	-	-	-	-	-	-	-	-	-	-
Light poles	-	-	-	-	-	33	70	53	57	57
Scoreboard	-	-	-	-	-	-6	-3	-3	28	-3
Pressbox HVAC	-	-	-	-	-	3	3	90	35	0
Pressbox Roof	-	-	-	-	-	5	3	93	35	0
Pressbox Flooring	-	-	-	-	-	5	80	87	13	0
Ticket Booths	-	-	-	-	-	-	3	90	35	0
Ticket or Restroom / Concession - Home - HVAC	-	-	-	-	-	5	30	90	-	0
Ticket or Restroom / Concession - Home - Roof	-	-	-	-	-	33	3	90	40	0
Ticket or Restroom / Concession - Visitor - HVAC	-	-	-	-	-	-	-	-	-	80
Ticket or Restroom / Concession - Visitor - Roof	-	-	-	-	-	33	3	90	40	80
Restrooms - Home	-	-	-	-	-	5	-	90	35	5
Restrooms - Visitor	-	-	-	-	-	5	3	90	35	5
Restrooms - North End	-	-	-	-	-	-	-	-	-	0
Athletic Warehouse	-	-	-	-	-	-	-	-	-	-
Band Tower	-	-	-	-	-	100		100	100	100
FIELD HOUSES	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	35	35	35	35	35
Roof - Metal	-	-	-	-	-	57	57	57	57	57
Electrical Panels	-	-	-	-	-	57	57	57	57	57
Fire Safety - Alarm System	-	-	-	-	-	38	35	35	35	35
Fire Safety - Sprinkler System	-	-	-	-	-	74	74	74	74	74
Flooring - Carpet	-	-	-	-	-	12	13	13	13	13
Flooring - Epoxy	-	-	-	-	-	35	35	35	35	35
Flooring - Concrete/Terrazzo	-	-	-	-	-	74	74	74	74	74
Restrooms - Locker room	-	-	-	-	-	35	33	38	33	35
Restrooms - Coaches	-	-	-	-	-	35	35	35	35	35
Lockers	-	-	-	-	-	68	64	68	64	68
Benches	-	-	-	-	-	74	74	74	74	74
Paint	-	-	-	-	-	73	14	60	70	60
Exterior Lighting	-	-	-	-	-	35	35	35	35	35
Activity Centers / OLD FIELD HOUSES	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Fire Safety - Alarm System	-	-	-	-	-	55	90	19	51	-
Activity Centers - HVAC	-	-	-	-	-	55	90	43	54	-
Activity Centers - Roof - Flat	-	-	-	-	-	55	90	43	78	-

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
Activity Centers - Electrical Panels	-	-	-	-	-	70	93	57	70	-
Activity Centers - Fire Safety - Sprinkler System	-	-	-	-	-	82	96	82	82	-
Activity Centers - Flooring	-	-	-	-	-	78	95	73	78	-
Activity Centers - Bleachers	-	-	-	-	-	70	93	63	70	-
Activity Centers - Restrooms	-	-	-	-	-	55	90	45	55	-
Activity Centers - Scoreboard	-	-	-	-	-	55	90	45	55	-
Activity Centers - Locker Room Flooring	-	-	-	-	-	55	90	45	55	-
Activity Centers - Locker Room Benches	-	-	-	-	-	82	96	78	82	-
Activity Centers - Locker Room Lockers	-	-	-	-	-	78	95	73	78	-
Field House -HVAC	-	-	-	-	-	90	5	90	-	-
Field House - Roof - Flat	-	-	-	-	-	90	5	90	-	-
Field House - Roof - Flat	-	-	-	-	-	-	-	93	-	-
Field House - Roof - Metal	-	-	-	-	-	-	-	-	-	-
Field House - Electrical Panels	-	-	-	-	-	20	33	93	-	-
Field House - Alarm System	-	-	-	-	-		5	90	-	-
Field House - Fire Safety - Sprinkler System	-	-	-	-	-	52	60	96	-	-
Field House - Flooring - Carpet	-	-	-	-	-	-	-12	87	-	-
Field House - Flooring - Concrete/Terrazzo	-	-	-	-	-	75	5	-	-	-
Field House - Flooring - Epoxy	-	-	-	-	-	-	-	90	-	-
Field House - Flooring - Epoxy	-	-	-	-	-	-	-	90	-	-
Field House - Locker Room Flooring	-	-	-	-	-	75	3	-	-	-
Field House - Locker Room Benches	-	-	-	-	-	75	48	96	-	-
Field House - Locker Room Lockers	-	-	-	-	-	38	93	90	-	-
Paint	-	-	-	-	-	-	53	90	-	-
Paint - Exterior	-	-	-	-	-	90	5	90	-	-
INDOOR ATHLETIC CENTERS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	45	5	-13	45	75
Roof - Metal	-	-	-	-	-	67	5	10	67	8
Electrical Panels	-	-	-	-	-	67	33	10	67	7
Fire Safety - Alarm System	-	-	-	-	-	50	5	-	50	-
Fire Safety - Sprinkler System	-	-	-	-	-	80	60	-	80	-
Artificial Turf	-	-	-	-	-	27	-12	5	29	13
Flooring - Carpet	-	-	-	-	-	-	5	-	-	-
Flooring - Concrete/Terrazzo	-	-	-	-	-	-	-	-	-	-
Locker Room Flooring	-	-	-	-	-	-	3	-	-	75
Locker Room Benches	-	-	-	-	-	-	48	-	-	-
Locker Room Lockers	-	-	-	-	-	-	93	-	-	88
Weight room flooring	-	-	-	-	-	100	100	50	100	-
Paint	-	-	-	-	-	50	53	60	80	70
Paint - Exterior	-	-	-	-	-	50	5	90	50	-15
SPORTS COMPLEXES	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Parking Lots	-	-	-	-	-	82	-	-	78	-
BASEBALL FIELDS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Bleachers	-	-	-	-	-	78	40	50	65	20
Backstop Netting	-	-	-	-	-	40	73	9	8	13
Scoreboard	-	-	-	-	-	55	65	10	30	60
Pressbox	-	-	-	-	-	55	5	90	20	-13
Paint - Dugout	-	-	-	-	-	40	100	60	7	60
Light poles	-	-	-	-	-	70	18	2	53	-1
Field Leveling	-	-	-	-	-	50	75	75	50	75
Batting Cage	-	-	-	-	-	55	45	45	30	45
Concession	-	-	-	-	-	-	15	0	-	-10

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
Restrooms / Concession	-	-	-	-	-	-	-	-	-	-
HVAC	-	-	-	-	-	55	-	-	30	-
Roof - Metal	-	-	-	-	-	70	-	-	53	-
Flooring	-	-	-	-	-	55	-	-	18	-
Lockers	-	-	-	-	-	-	-	-	30	-
SOFTBALL FIELDS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Bleachers	-	-	-	55	-	78	30	-	73	90
Restrooms	-	-	-	10	-	-	-	-	-	80
Backstop Netting	-	-	-	13	-	40	13	-	27	73
Scoreboard	-	-	-	75	-	55	65	-	45	60
Pressbox	-	-	-	10	-	55	3	-	45	80
Paint - Dugout	-	-	-	80	-	40	100	-	23	80
Light poles	-	-	-	40	-	70	20	-	63	87
Turf	-	-	-	-	-	-	-	-	-	50
Field Leveling	-	-	-	0	-	25	25	-	50	-
Batting Cage	-	-	-	45	-	55	45	-	45	80
Concession	-	-	-	10	-	-	-	-	45	80
TENNIS COURTS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Courts	-	-	76	-		82	90		78	
Resurfaced	-	-	60	-		10	90		-5	
Light Poles	-	-	60	-	-	70	87	-	63	-
Shade Structure	-	-	50	-	-	55	80	-	45	50
Northwest Courts	-	-	-	-	-	-	-	-	-	26
Northwest Courts Resurfaced	-	-	-	-	-	-	-	-	-	0
Northwest Courts Light Poles	-	-	-	-	-	-	-	-	-	53
Southwest Courts	-	-	-	-	-	-	-	-	-	42
Southwest Courts Resurfaced	-	-	-	-	-	-	-	-	-	0
WEIGHT ROOM	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	-	-	0	-	75
Roof - Metal	-	-	-	-	-	-	-	33	-	33
Electrical Panels	-	-	-	-	-	-	-	33	-	33
Fire Safety - Alarm System	-	-	-	-	-	-	-	-	-	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	-	-
Flooring	-	-	-	-	-	-	-	90	-	100
Paint	-	-	-	-	-	-	-	87	-	75
GIRLS WRESTLING LOCKER/WEIGHT ROOM	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	-	-	90	-	-
Roof - Metal	-	-	-	-	-	-	-	93	-	-
Electrical Panels	-	-	-	-	-	-	-	93	-	-
Fire Safety - Alarm System	-	-	-	-	-	-	-	90	-	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	96	-	-
Flooring - Epoxy	-	-	-	-	-	-	-	90	-	-
Restroom	-	-	-	-	-	-	-	90	-	-
Lockers	-	-	-	-	-	-	-	95	-	-
Benches	-	-	-	-	-	-	-	96	-	-
Paint	-	-	-	-	-	-	-	90	-	-
AGRICULTURE SHOP	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	-	-	-	20	-
Roof - Metal	-	-	-	-	-	-	-	-	85	-
Flooring - VCT	-	-	-	-	-	-	-	-	60	-

Flower Mound 9th

Year Built / Age 2014 / 9

Campus Square Footage 115,261

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2014**	**82**				
Flower Mound 9th - HVAC	**20**	**2014**	55	55	13%	**62**	**RTU**
Flower Mound 9th - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Flower Mound 9th - Ceiling and Lights	**20**	**2014**	55	55		**55**	**LED & T8**
Flower Mound 9th - Roof - Flat	**20**	**2014**	55	50	-22%	**41**	**Mod Bit**
Flower Mound 9th - Electrical Switchgear	**30**	**2014**	70	70	-10%	**63**	
Flower Mound 9th - Elevator	**25**	**2014**	64	60	-50%	**31**	**Thyssen Krupp**
Flower Mound 9th - Fire Safety - Fire Alarm	**20**	**2014**	55	55	-18%	**45**	**Edwards EST 3**
Flower Mound 9th - Fire Safety - ERRS		**2021**				**-**	**Tracking only**
Flower Mound 9th - Fire Safety - Sprinkler System	**50**	**2014**	82	82	14%	**94**	
Flower Mound 9th - Food Service Boilers	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Food Service Freezers	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Generator	**40**	**2014**	78	78		**78**	**Cummins - Diesel; 200 KW**
Flower Mound 9th - Flooring - Classrooms - VCT	**20**	**2014**	55	55		**55**	**VCT**
Flower Mound 9th - Flooring - Corridors - VCT	**20**	**2014**	55	55		**55**	**VCT**
Flower Mound 9th - Flooring - Corridors - Stained Concrete	**30**	**2018**	83	83		**83**	**Stained concrete**
Flower Mound 9th - Flooring - Library	**30**	**2018**	83	83		**83**	**Stained concrete**
Flower Mound 9th - Flooring - Offices	**20**	**2014**	55	55		**55**	**VCT**
Flower Mound 9th - Flooring - Cafeteria	**30**	**2018**	83	83		**83**	**Stained concrete**
Flower Mound 9th - Flooring - Connection Corridor	**50**	**2014**	82	82		**82**	**Terrazzo some cracking**
Flower Mound 9th - Flooring - Kitchen	**50**	**2014**	82	82		**82**	**Terrazzo**
Flower Mound 9th - Plastic Laminate	**40**	**2014**	78	78		**78**	
Flower Mound 9th - Doors	**20**	**2014**	55	55		**55**	**Dark**
Flower Mound 9th - Door Hardware	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Casework (Built-Ins)	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Restrooms - Faculty	**20**	**2014**	55	55		**55**	**Ceramic tile**
Flower Mound 9th - Restrooms - Student	**20**	**2014**	55	55		**55**	**Ceramic tile**
Flower Mound 9th - Marquee	**15**	**2014**	40	40		**40**	**LED; Digital**
Flower Mound 9th - Paving - Parking Lots	**50**	**2014**	82	82		**82**	
Flower Mound 9th - Paving - Sidewalks	**40**	**2014**	78	78		**78**	**Shotblast Front porch 2018**
Flower Mound 9th - Exterior Lighting	**20**	**2014**	55	55		**55**	**LED**
Flower Mound 9th - Paint - Commons	**15**	**2014**	40	45		**43**	**Office areas repainted 2018 - color changes**
Flower Mound 9th - Paint - Cafeteria	**15**	**2014**	40	40		**40**	
Flower Mound 9th - Paint - Exterior	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Paint - Hallways	**20**	**2014**	55	55		**55**	
Sports and Fine Arts							
Flower Mound 9th - Cafetorium - Curtains	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Cafetorium - Lighting	**20**	**2014**	55	55		**55**	**LED**

Hebron 9th

Year Built / Age 2010 / 13

Campus Square Footage 179,248

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2010**	**74**				
Hebron 9th - HVAC	**20**	**2010**	35	30	3%	**34**	**CHILLER**
Hebron 9th - HVAC - Controls	**20**	**2010**	35	25		**30**	**Controls = Alerton (control)/Automated Logic (hardware)**
Hebron 9th - Ceiling and Lights	**20**	**2010**	35	35		**35**	**T5**
Hebron 9th - Roof - Flat	**20**	**2010**	35	35	11%	**39**	**4 Ply Built Up**
Hebron 9th - Roof - Standing Seam	**30**	**2010**	57	57	11%	**63**	
Hebron 9th - Electrical Switchgear	**30**	**2010**	57	57	7%	**61**	
Hebron 9th - Elevator	**25**	**2010**	48	40	12%	**49**	**Thyssen Krupp**
Hebron 9th - Fire Safety - Fire Alarm	**20**	**2010**	35	35	16%	**41**	**FCI Gamewell E3 Series**
Hebron 9th - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Hebron 9th - Fire Safety - Sprinkler System	**50**	**2010**	74	74	-13%	**64**	
Hebron 9th - Food Service Boilers	**20**	**2010**	35	35		**35**	
Hebron 9th - Food Service Freezers	**20**	**2010**	35	35		**35**	
Hebron 9th - Generator	**40**	**2014**	78	78		**78**	**Kohler - Diesel; 275 KW**
Hebron 9th - Flooring - Classrooms	**20**	**2010**	35	35		**35**	**VCT**
Hebron 9th - Flooring - Corridors	**20**	**2010**	35	35		**35**	**VCT**
Hebron 9th - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet & LVT**
Hebron 9th - Flooring - Offices	**15**	**2010**	13	13		**13**	**Carpet**
Hebron 9th - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	**VCT**
Hebron 9th - Flooring - Kitchen	**50**	**2010**	74	74		**74**	**Terrazzo**
Hebron 9th - Flooring - Band	**15**	**2010**	13	13		**13**	**Carpet**
Hebron 9th - Flooring - Choir	**15**	**2010**	13	13		**13**	**Carpet**
Hebron 9th - Flooring - Orchestra	**15**	**2010**	13	13		**13**	**Carpet**
Hebron 9th - Plastic Laminate	**40**	**2010**	68	68		**68**	
Hebron 9th - Doors	**20**	**2010**	35	35		**35**	**Medium Dark**
Hebron 9th - Door Hardware	**20**	**2010**	35	35		**35**	
Hebron 9th - Casework (Built-Ins)	**20**	**2010**	35	35		**35**	
Hebron 9th - Restrooms - Faculty	**20**	**2010**	35	35		**35**	
Hebron 9th - Restrooms - Student	**20**	**2010**	35	40		**38**	**CT to ceiling. Block Part. w/solid wood doors**
Hebron 9th - Marquee	**15**	**2017**	60	60		**60**	**2017 Change to LED; Digital**
Hebron 9th - Paving - Parking Lots	**50**	**2010**	74	74		**74**	
Hebron 9th - Paving - Sidewalks	**40**	**2010**	68	68		**68**	
Hebron 9th - Exterior Lighting	**20**	**2021**	90	90		**90**	**Pole Lights LED 2021**
Hebron 9th - Paint - Commons	**15**	**2010**	13	13		**13**	
Hebron 9th - Paint - Cafeteria	**15**	**2010**	13	13		**13**	
Hebron 9th - Paint - Gyms	**20**	**2010**	35	35		**35**	
Hebron 9th - Paint - Exterior	**20**	**2010**	35	35		**35**	
Hebron 9th - Paint - Hallways	**20**	**2010**	35	35		**35**	**Maintain Traffic Areas**
Sports and Fine Arts							
Hebron 9th - Perf Arts - Curtains	**20**	**2010**	35	35		**35**	
Hebron 9th - Perf Arts - Cafetorium Lighting	**20**	**2010**	35	35		**35**	
Hebron 9th - Track	**-**					**-**	
Hebron 9th - Field Lights	**-**					**-**	
Hebron 9th - Bleachers - Exterior	**-**					**-**	
Hebron 9th - Bleachers - Interior	**30**	**2010**	57	57		**57**	
Hebron 9th - Gym Main - Flooring	**40**	**2010**	68	68		**68**	**Sanded & Refinished 2021**
Hebron 9th - Gym Auxiliary - Flooring	**40**	**2010**	68	68		**68**	**Sanded & Refinished 2022**
Hebron 9th - Gym -Locker Room - Flooring	**20**	**2010**	35	35		**35**	**Epoxy**
Hebron 9th - Gym - Lockers	**40**	**2010**	68	68		**68**	
Hebron 9th - Gym - Benches	**50**	**2010**	74	74		**74**	**Concrete**
Hebron 9th - Gym - Partitions	**20**	**2010**	35	35		**35**	**Block**

LHS Harmon

Year Built / Age 2011 / 12

Campus Square Footage 212,748

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2011**	**76**				
LHS Harmon - HVAC	**20**	**2011**	40	40	-1%	**40**	**CHILLER; hot water coil in cafeteria unit replaced 2021**
LHS Harmon - HVAC - Controls	**20**	**2011**	40	40		**40**	**Controls = Alerton**
LHS Harmon - Ceiling and Lights	**20**	**2011**	40	40		**40**	
LHS Harmon - Roof - Flat	**20**	**2011**	40	40	14%	**46**	**4 Ply Built up**
LHS Harmon - Roof - Standing Seam	**30**	**2011**	60	60	14%	**68**	
LHS Harmon - Electrical Switchgear	**30**	**2011**	60	60	0%	**60**	
LHS Harmon - Elevator	**25**	**2011**	52	52	20%	**62**	**Otis**
LHS Harmon - Fire Safety - Fire Alarm	**20**	**2021**	90	90		**90**	**Edwards EST 3; some older components need replacement**
LHS Harmon - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
LHS Harmon - Fire Safety - Sprinkler System	**50**	**2011**	76	76	-15%	**65**	
LHS Harmon - Food Service Boilers	**20**	**2011**	40	40		**40**	
LHS Harmon - Food Service Freezers	**20**	**2011**	40	40		**40**	
LHS Harmon - Generator	**40**	**2011**	70	70		**70**	**Generac - Diesel; 600 KW; new water pump 2021**
LHS Harmon - Flooring - Classrooms	**20**	**2011**	40	40		**40**	**VCT**
LHS Harmon - Flooring - Corridors	**20**	**2011**	40	40		**40**	**VCT**
LHS Harmon - Flooring - Library	**15**	**2011**	20	20		**20**	**Carpet**
LHS Harmon - Flooring - Offices	**15**	**2011**	20	20		**20**	**Carpet; Principal & Secretary areas replaced 2023**
LHS Harmon - Flooring - Cafeteria	**20**	**2011**	40	40		**40**	**VCT**
LHS Harmon - Flooring - Kitchen	**50**	**2011**	76	76		**76**	**Terrazzo**
LHS Harmon - Flooring - Band	**15**	**2011**	20	20		**20**	**Carpet**
LHS Harmon - Flooring - Choir	**15**	**2011**	20	20		**20**	**Carpet**
LHS Harmon - Flooring - Orchestra	**15**	**2011**	20	20		**20**	**Carpet**
LHS Harmon - Plastic Laminate	**40**	**2011**	70	70		**70**	
LHS Harmon - Doors	**20**	**2011**	40	35		**38**	**White Oak**
LHS Harmon - Door Hardware	**20**	**2011**	40	40		**40**	**Medeco**
LHS Harmon - Casework (Built-Ins)	**20**	**2011**	40	40		**40**	
LHS Harmon - Restrooms - Faculty	**20**	**2011**	40	45		**43**	**CMU Walls**
LHS Harmon - Restrooms - Student	**20**	**2011**	40	45		**43**	**CMU Walls**
LHS Harmon - Marquee	**30**	**2011**	60	60		**60**	
LHS Harmon - Paving - Parking Lots	**50**	**2011**	76	76		**76**	**Concrete**
LHS Harmon - Paving - Sidewalks	**40**	**2011**	70	70		**70**	
LHS Harmon - Exterior Lighting	**20**	**2011**	40	40		**40**	
LHS Harmon - Paint - Commons	**15**	**2011**	20	20		**20**	
LHS Harmon - Paint - Cafeteria	**15**	**2018**	67	67		**67**	
LHS Harmon - Paint - Gyms	**20**	**2011**	40	40		**40**	**Lower Walls**
LHS Harmon - Paint - Exterior	**20**	**2011**	40	40		**40**	**Metal Doors**
LHS Harmon - Paint - Hallways	**20**	**2011**	40	40		**40**	**Athletic areas painted 2015**
Sports and Fine Arts							
LHS Harmon - Perf Arts - Curtains	**20**	**2011**	40	40		**40**	
LHS Harmon - Perf Arts - Cafetorium Lighting	**20**	**2011**	40	40		**40**	
LHS Harmon - Synthetic Track	**10**	**2011**	-20	0		**-10**	**Fair; some damage; long jump run in very poor condition; repaired a few places when bleachers were added; repairs to surface**
LHS Harmon - Field Lights	**30**	**2011**	60	60		**60**	
LHS Harmon - Stadium Scoreboard	**18**	**2015**	56	56		**56**	**Moved from Purnell**
LHS Harmon - Lightning Detection		**2023**					**Tracking Only - Maintained by Athletics**
LHS Harmon - Bleachers - Exterior	**40**	**2019**	90	90		**90**	
LHS Harmon - Bleachers - Interior	**30**	**2011**	60	60		**60**	
LHS Harmon - Gym Main - Flooring	**40**	**2011**	70	70		**70**	
LHS Harmon - Gym Auxiliary - Flooring	**40**	**2011**	70	70		**70**	
LHS Harmon - Gym - Locker Room - Flooring	**20**	**2011**	40	40		**40**	**Epoxy**
LHS Harmon - Gym - Lockers	**40**	**2011**	70	70		**70**	
LHS Harmon - Gym - Benches	**50**	**2011**	76	76		**76**	**Concrete**
LHS Harmon - Gym - Partitions	**20**	**2011**	40	40		**40**	**CMU**
TENNIS COURTS 2011							
LHS Harmon - Tennis Courts	**50**	**2011**	76	76		**76**	**12 Courts; replaced gate & most latches; slats added 2020**
LHS Harmon - Tennis Courts Resurfaced	**10**	**2019**	60	60		**60**	**Adding additional slats to interior fencing 2022**
LHS Harmon - Tennis Courts Light Poles	**30**	**2011**	60	60		**60**	
LHS Harmon - Tennis Courts Shade Structure	**20**	**2013**	50	50		**50**	

LHS Killough

Year Built / Age 2005 / 18

Campus Square Footage 175,658

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2005**	**64**				
LHS Killough - HVAC	**20**	**2005**	10	10	-19%	**8**	**CHILLER - Boilers replaced 2021; 3 heaters in boiler rm on Generator 2021**
LHS Killough - HVAC - Control	**20**	**2005**	10	10		**10**	**Controls = Alerton**
LHS Killough - Ceiling and Lights	**20**	**2005**	10	10		**10**	**T-8**
LHS Killough - Roof - Flat	**20**	**2005**	10	10	-48%	**5**	**4 Ply Built up**
LHS Killough - Roof - Shingled	**20**	**2005**	10	5	-48%	**4**	
LHS Killough - Electrical Switchgear	**30**	**2005**	40	40	-4%	**38**	
LHS Killough - Elevator (Main Campus)	**25**	**2005**	28	20	9%	**26**	**Thyssen Krupp**
LHS Killough - Lift (Softball Press Box)	**-**					**-**	**Removed 7/2019**
LHS Killough - Fire Safety - Fire Alarm	**20**	**2019**	80	80		**80**	**Edwards IO**
LHS Killough - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
LHS Killough - Fire Safety - Sprinkler System	**50**	**2005**	64	64	4%	**67**	
LHS Killough - Food Service Boilers	**20**	**2005**	10	10		**10**	
LHS Killough - Food Service Freezers	**20**	**2005**	10	10		**10**	
LHS Killough - Generator	**40**	**2005**	55	55		**55**	**Olympian - Diesel; 150 KW**
LHS Killough - Flooring - Classrooms	**20**	**2005**	10	10		**10**	**VCT**
LHS Killough - Flooring - Corridors	**20**	**2005**	10	10		**10**	**VCT**
LHS Killough - Flooring - Library	**15**	**2021**	87	87		**87**	**Carpet**
LHS Killough - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet**
LHS Killough - Flooring - Cafeteria	**20**	**2005**	10	10		**10**	**VCT**
LHS Killough - Flooring - Kitchen	**50**	**2005**	64	64		**64**	**Terrazzo**
LHS Killough - Flooring - Band	**15**	**2021**	87	87		**87**	**Carpet**
LHS Killough - Plastic Laminate	**40**	**2005**	55	55		**55**	
LHS Killough - Doors	**20**	**2005**	10	10		**10**	**Golden Oak**
LHS Killough - Door Hardware	**20**	**2005**	10	10		**10**	**Best**
LHS Killough - Casework (Built-Ins)	**20**	**2005**	10	10		**10**	
LHS Killough - Restrooms - Faculty	**20**	**2005**	10	10		**10**	
LHS Killough - Restrooms - Student	**20**	**2005**	10	10		**10**	**Solid Plastic**
LHS Killough - Marquee	**15**	**2022**	93	93		**93**	**Digital**
LHS Killough - Paving - Parking Lots	**50**	**2005**	64	64		**64**	**Concrete**
LHS Killough - Paving - Sidewalks	**40**	**2005**	55	55		**55**	
LHS Killough - Exterior Lighting	**20**	**2005**	10	10		**10**	**Partial LED (3 Poles)**
LHS Killough - Paint - Commons	**15**	**2019**	73	73		**73**	
LHS Killough - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
LHS Killough - Paint - Gyms	**20**	**2005**	10	10		**10**	**Lower walls painted 2018**
LHS Killough - Paint - Exterior	**20**	**2005**	10	10		**10**	
LHS Killough - Paint - Hallways	**20**	**2005**	10	10		**10**	**Frames/Base painted 2018; walls maintained 2021**
Sports and Fine Arts							
LHS Killough - Perf Arts - Curtains	**20**	**2005**	10	10		**10**	
LHS Killough - Perf Arts - Cafetorium Lighting	**20**	**2005**	10	10		**10**	
LHS Killough - Asphalt Track	**20**	**2005**	10	10		**10**	**2020 removed rubberized surface, sealed & repainted lines**
LHS Killough - Bleachers - Interior	**30**	**2005**	40	40		**40**	
LHS Killough - Gym Main - Flooring	**40**	**2005**	55	55		**55**	**Sanded and Refinished 2021**
LHS Killough - Gym Auxiliary - Flooring	**40**	**2005**	55	55		**55**	**Sanded and Refinished 2021**
LHS Killough - Gym - Locker Room - Flooring	**20**	**2005**	10	15		**13**	**Epoxy; refinished 2021**
LHS Killough - Gym - Lockers	**40**	**2005**	55	55		**55**	
LHS Killough - Gym - Benches	**20**	**2005**	10	15		**13**	**Plastic, wood**
LHS Killough - Gym - Partitions	**20**	**2005**	10	10		**10**	**Solid Plastic**
SOFTBALL FIELD 2005							

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
LHS Killough - Softball Field Bleachers	40	2005	55	55		55	
LHS Killough - Softball Field Restrooms	20	2005	10	10		10	2x2 flt CT; 4x4 wall tile to ceiling; solid plastic partitions
LHS Killough - Softball Field Backstop Netting	15	2010	13	13		13	Repaired netting in 2020, 2021 & 2022; starting to show wear at bottom
LHS Killough - Softball Field Scoreboard	20	2018	75	75		75	
LHS Killough - Softball Field Pressbox	20	2005	10	10		10	
LHS Killough - Softball Field Paint - Dugout	15	2020	80	80		80	
LHS Killough - Softball Field Light poles	30	2005	40	40		40	
LHS Killough - Softball Field Leveling	4	2019	0	0		0	2023/24 renovation scheduled; edges need to be removed and resodded
LHS Killough - Softball Field Bullpens	20	2016	65	65		65	1st and 3rd added 2016
LHS Killough - Softball Field Batting Cage	20	2012	45	45		45	will need new netting in covered cages
LHS Killough - Softball Field Concession	20	2005	10	10		10	
LHS Killough - Lightning Detection		2023					Tracking Only - Maintained by Athletics

Marcus 9TH

Year Built / Age 2014 / 9

Campus Square Footage 109,046

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2014**	**82**				
Marcus 9th - HVAC	**20**	**2014**	55	55	-2%	**54**	**RTU**
Marcus 9th - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Marcus 9th - Ceiling and Lights	**20**	**2014**	55	55		**55**	**Mixed**
Marcus 9th - Roof - Flat	**20**	**2021**	90	90	11%	**100**	**2017 hail damage insurance replacement**
Marcus 9th - Electrical Switchgear	**30**	**2014**	70	70	4%	**73**	**Square D**
Marcus 9th - Elevator	**25**	**2014**	64	60	-50%	**31**	**Thyssen Krupp**
Marcus 9th - Fire Safety - Fire Alarm	**20**	**2014**	55	55	8%	**59**	**Notifier NFS2-3030E**
Marcus 9th - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Marcus 9th - Fire Safety - Sprinkler System	**50**	**2014**	82	82	9%	**89**	
Marcus 9th - Food Service Boilers	**20**	**2014**	55	55		**55**	
Marcus 9th - Food Service Freezers	**20**	**2014**	55	55		**55**	
Marcus 9th - Generator	**40**	**2014**	78	78		**78**	**Cummins - Diesel; 200 KW; Supply 9th and MAC**
Marcus 9th - Flooring - Classrooms - VCT	**20**	**2014**	55	55		**55**	**VCT**
Marcus 9th - Flooring - Corridors - VCT	**20**	**2014**	55	55		**55**	**VCT**
Marcus 9th - Flooring - Corridors - Stained Concrete	**30**	**2014**	70	70		**70**	**Stained concrete**
Marcus 9th - Flooring - Library	**30**	**2014**	70	70		**70**	**Stained concrete**
Marcus 9th - Flooring - Offices	**20**	**2014**	55	55		**55**	**VCT**
Marcus 9th - Flooring - Cafeteria	**30**	**2014**	70	70		**70**	**Stained concrete**
Marcus 9th - Flooring - Kitchen	**50**	**2014**	82	82		**82**	**Terrazzo**
Marcus 9th - Plastic Laminate	**40**	**2014**	78	78		**78**	
Marcus 9th - Doors	**20**	**2014**	55	55		**55**	**Mahogany**
Marcus 9th - Door Hardware	**20**	**2014**	55	55		**55**	
Marcus 9th - Casework (Built-Ins)	**20**	**2014**	55	55		**55**	
Marcus 9th - Restrooms - Faculty	**20**	**2014**	55	55		**55**	**Ceramic tile**
Marcus 9th - Restrooms - Student	**20**	**2014**	55	55		**55**	**Ceramic tile; CMU**
Marcus 9th - Marquee	**15**	**2014**	40	40		**40**	**LED; Digital**
Marcus 9th - Paving - Parking Lots	**50**	**2014**	82	82		**82**	
Marcus 9th - Paving - Sidewalks	**40**	**2014**	78	78		**78**	
Marcus 9th - Exterior Lighting	**20**	**2014**	55	55		**55**	**LED**
Marcus 9th - Paint - Commons	**15**	**2018**	67	67		**67**	
Marcus 9th - Paint - Cafeteria	**15**	**2018**	67	67		**67**	
Marcus 9th - Paint - Exterior	**20**	**2014**	55	55		**55**	
Marcus 9th - Paint - Hallways	**20**	**2014**	55	55		**55**	**some areas painted in 2018 - as needed**
Sports and Fine Arts							
Marcus 9th - Cafetorium - Projector Lift	**2019**						**Technology Item - Tracking purposes only - replaced Summer of 2019**
Marcus 9th - Cafetorium - Curtains	**20**	**2014**	55	55		**55**	
Marcus 9th - Cafetorium - Lighting	**20**	**2014**	55	55		**55**	**LED**

Flower Mound HS

Year Built / Age 1999 / 24

Campus Square Footage 531,715

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1999**	**52**				
MAIN CAMPUS							
Flower Mound HS - HVAC - Original	**20**	**2021**	90	90		**90**	**RTU**
Flower Mound HS - HVAC - 2002 Addition	**20**	**2002**	-5	10	9%	**2**	**Auditorium, RTU**
Flower Mound HS - HVAC - 2008 Addition	**20**	**2008**	25	25	9%	**27**	**Gym, Wrestling, Fine Arts, RTU**
Flower Mound HS - HVAC - 2014 Addition	**20**	**2014**	55	55	9%	**60**	**Blackbox, RTU**
Flower Mound HS - HVAC - 2023 Addition	**20**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Flower Mound HS - Ceiling and Lights - Original	**20**	**2021**	90	90		**90**	
Flower Mound HS - Ceiling and Lights - 2002 Addition	**20**	**2002**	-5	0		**-3**	**Auditorium House Lighting**
Flower Mound HS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	20		**23**	**Gym, Wrestling, Fine Arts**
Flower Mound HS - Ceiling and Lights - 2014 Addition	**20**	**2014**	55	55		**55**	**Blackbox**
Flower Mound HS - Ceiling and Lights - 2023 Addition	**20**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Roof - Original	**20**	**2021**	90	90		**90**	
Flower Mound HS - Roof - 2002 Addition	**20**	**2002**	-5	5	14%	**0**	**Auditorium**
Flower Mound HS - Roof - 2008 Addition	**20**	**2008**	25	25	14%	**28**	**Gym, Wrestling, Fine Arts**
Flower Mound HS - Roof - 2014 Addition	**20**	**2014**	55	55	14%	**63**	**Blackbox**
Flower Mound HS - Roof - 2023 Addition	**20**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Electrical Switchgear - Orig	**30**	**1999**	20	20	0%	**20**	
Flower Mound HS - Electrical Panels - 2002 Add	**30**	**2002**	30	30	0%	**30**	**Auditorium**
Flower Mound HS - Electrical Panels - 2008 Add	**30**	**2008**	50	50	0%	**50**	**Gym, Wrestling, Fine Arts**
Flower Mound HS - Electrical Panels - 2014 Add	**30**	**2014**	70	70	0%	**70**	**Blackbox**
Flower Mound HS - Electrical Panels - 2023 Add	**30**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Elevator #1 (main)	**25**	**2022**	96	96	20%	**100**	**Dover**
Flower Mound HS - Elevator #2 (Stadium)	**25**	**2003**	20	10	0%	**15**	**Schindler**
Flower Mound HS - Elevator #3 (Arena)	**25**	**2014**	64	60	14%	**71**	**Thyssen Krupp**
Flower Mound HS - Lift (Auditorium)	**25**	**2002**	16	16		**16**	**Nat'l Wheel-O-Vator**
Flower Mound HS - Fire Safety - Fire Alarm	**20**	**2014**	55	55	0%	**55**	**New Panel / Original Devices; Edwards EST 3**
Flower Mound HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Flower Mound HS - Fire Safety - Sprinkler Sys-Orig	**50**	**1999**	52	52	-8%	**48**	
Flower Mound HS - Fire Safety - Sprinkler Sys-2002 Add	**50**	**2002**	58	58	-8%	**54**	**Auditorium**
Flower Mound HS - Fire Safety - Sprinkler Sys-2008 Add	**50**	**2008**	70	70	-8%	**65**	**Gym, Wrestling, Fine Arts**
Flower Mound HS - Fire Safety - Sprinkler Sys-2014 Add	**50**	**2014**	82	82		**82**	**Blackbox**
Flower Mound HS - Fire Safety - Sprinkler Sys-2023 Add	**50**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Storm Shelter - 2023 Add	**50**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Food Service Boilers	**20**	**2022**	95	95		**95**	
Flower Mound HS - Food Service Freezers	**20**	**2021**	90	90		**90**	
Flower Mound HS - Generator	**40**	**2022**	98	98		**98**	**Kohler - Diesel; 81 KW**
Flower Mound HS - Flooring - Classrooms - VCT	**20**	**2021**	90	90		**90**	**VCT**
Flower Mound HS - Flooring - Corridors - VCT	**20**	**2021**	90	90		**90**	**VCT**
Flower Mound HS - Flooring - Library	**20**	**2021**	90	90		**90**	**LVT**
Flower Mound HS - Flooring - Offices	**15**	**2022**	93	93		**93**	**Carpet**
Flower Mound HS - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Flower Mound HS - Flooring - Kitchen	**50**	**1999**	52	52		**52**	**Terrazzo**
Flower Mound HS - Flooring - Band	**20**	**2018**	75	75		**75**	**VCT**
Flower Mound HS - Flooring - Choir	**20**	**2018**	75	75		**75**	**VCT**
Flower Mound HS - Flooring - Drama	**20**	**2018**	75	75		**75**	**VCT**
Flower Mound HS - Flooring - Orchestra	**20**	**2018**	75	75		**75**	**VCT**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Flower Mound HS - Flooring - 2023 Fine Arts Addition	20	2023	100	100		100	VCT
Flower Mound HS - Plastic Laminate	40	2002	48	48		48	
Flower Mound HS - Doors	20	2021	90	90		90	
Flower Mound HS - Door Hardware	20	2021	90	90		90	
Flower Mound HS - Casework (Built-Ins)	20	2021	90	90		90	
Flower Mound HS - Restrooms - Faculty	20	2021	90	90		90	
Flower Mound HS - Restrooms - Student	20	2021	90	90		90	
Flower Mound HS - Restrooms - 2002 Addition	20	2021	90	90		90	
Flower Mound HS - Restrooms - 2008 Addition	20	2008	25	20		23	
Flower Mound HS - Restrooms - 2014 Addition	20	2014	55	55		55	Auditorium
Flower Mound HS - Marquee	20	2017	70	70		70	Monument sign only; not lit
Flower Mound HS - Paving - Parking Lots	50	1999	52	52		52	Concrete; need to address parking lot lighting
Flower Mound HS - Paving - Parking Lots	50	2013	80	80		80	Concrete, North Lot; need to address parking lot lighting
Flower Mound HS - Paving - Sidewalks	40	1999	40	35		38	Some sinking in areas
Flower Mound HS - Exterior Lighting	20	2013	50	50		50	LED
Flower Mound HS - Paint - Commons	15	2021	87	87		87	
Flower Mound HS - Paint - Cafeteria	15	2022	93	93		93	
Flower Mound HS - Paint - Auditorium	15	2019	73	73		73	
Flower Mound HS - Paint - J.A.C.	15	2014	40	45		43	paint maintained 2023
Flower Mound HS - Paint - Gyms	20	2021	90	90		90	
Flower Mound HS - Paint - Exterior	20	2022	95	95		95	
Flower Mound HS - Paint - Hallways	20	2022	95	95		95	
Flower Mound HS - Cafetorium - Curtains	20	2020	85	85		85	
Flower Mound HS - Cafetorium - Lighting	25	2021	92	92		92	
Flower Mound HS - Auditorium Curtains	20	2022	95	95		95	
Flower Mound HS - Auditorium Stage Lighting	25	2002	16	10		13	
Flower Mound HS - Auditorium Sound		2014				-	Tracking Replacement Yr only - In Technology Dept. Plans
Flower Mound HS - Auditorium Seating	20	2002	-5	5		0	
Flower Mound HS - Auditorium Flooring	15	2019	73	73		73	Replaced Summer of 2019
Flower Mound HS - Large Gym - Flooring	40	2020	93	93		93	Replaced Summer of 2020
Flower Mound HS - Large Gym - Bleachers	30	1999	20	20		20	Repairs made Summer 2019
Flower Mound HS - Large Gym - Scoreboard	20	2013	50	50		50	Nevco
Flower Mound HS - Middle Gym - Flooring	40	2012	73	73		73	
Flower Mound HS - Middle Gym - Bleachers	30	1999	20	20		20	Major repairs in 2018
Flower Mound HS - Middle Gym - Scoreboard	20	1999	-20	0		-10	Fair Play
Flower Mound HS - 2008 Gym - Flooring	20	2008	25	25		25	Rubber
Flower Mound HS - 2008 Gym - Bleachers	30	2008	50	50		50	
Flower Mound HS - Girls Locker Rooms - Flooring	20	2012	45	45		45	Epoxy
Flower Mound HS - Girls Locker Rooms - Benches	20	2012	45	45		45	Plastic wood
Flower Mound HS - Girls Locker Rooms - Partitions	20	2012	45	35		40	PLam
Flower Mound HS - Boys Locker Rooms - Flooring	20	2018	75	75		75	Epoxy
Flower Mound HS - Boys Locker Rooms - Benches	50	2018	90	90		90	Concrete
Flower Mound HS - Boys Locker Rooms - Partitions	20	2021	90	90		90	
STADIUM 2003							
Flower Mound HS - Stadium Bleachers	40	2003	50	50		50	
Flower Mound HS - Stadium Artificial Turf	8	2021	75	75		75	
Flower Mound HS - Stadium Synthetic Track	10	2012	-10	0		-5	Major track repair (twice) due to water faucet; repairs needed again
Flower Mound HS - Stadium PA System		2013				-	Tracking Replacement Yr only - In Technology Dept. Plans
Flower Mound HS - Stadium Lightpoles	30	2003	33	33		33	
Flower Mound HS - Stadium Scoreboard	18	2003	-11	0		-6	No longer supported
Flower Mound HS - Stadium Pressbox HVAC	20	2003	0	5		3	
Flower Mound HS - Stadium Pressbox Roof	20	2003	0	10		5	
Flower Mound HS - Stadium Pressbox Flooring	20	2003	0	10		5	Carpet; VCT
Flower Mound HS - Stadium Ticket / Concession - Home (2) - HVAC	20	2004	5	5		5	Package unit A/C only on Ticket booth installed by booster

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Flower Mound HS - Stadium Ticket / Concession - Home (2) - Roof	30	2003	33	33		33	Metal
Flower Mound HS - Stadium Ticket / Concession - Visitor (2) - Roof	30	2003	33	33		33	Metal
Flower Mound HS - Stadium Restrooms - Home	20	2003	0	10		5	Removed old drinking fountains and bricked wall; Painted 2018
Flower Mound HS - Stadium Restrooms - Visitor	20	2003	0	10		5	Painted 2018
Flower Mound HS - Stadium Band Tower	50	2023	100	100		100	
Flower Mound HS - Lightning Detection		2023					Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
Flower Mound HS - Field House HVAC	20	2010	35	35		35	
Flower Mound HS - Field House Roof - Metal	30	2010	57	57		57	
Flower Mound HS - Field House Electrical Panels	30	2010	57	57		57	Square D
Flower Mound HS - Field House Fire Safety - Alarm System	20	2010	35	40		38	EST - 3; Tied to Main bldg. Warning detection devices only.
Flower Mound HS - Field House Fire Safety - Sprinkler System	50	2010	74	74		74	
Flower Mound HS - Field House Flooring - Carpet	15	2010	13	10		12	
Flower Mound HS - Field House Flooring - Epoxy	20	2010	35	35		35	
Flower Mound HS - Field House Flooring - Concrete/Terrazzo	50	2010	74	74		74	
Flower Mound HS - Field House Restrooms	20	2010	35	35		35	
Flower Mound HS - Field House Restrooms - Coaches	20	2010	35	35		35	
Flower Mound HS - Field House Lockers	40	2010	68	68		68	
Flower Mound HS - Field House Benches	50	2010	74	74		74	Concrete
Flower Mound HS - Field House Paint	15	2019	73	73		73	
Flower Mound HS - Field House Exterior Lighting	20	2010	35	35		35	
J.A.C. 2014 / FIELD HOUSE 1999							
Flower Mound HS - J.A.C. Fire Safety - Alarm System	20	2014	55	55		55	Tied to Main bldg. Warning detection devices only. EST 3
Flower Mound HS - J.A.C. - HVAC	20	2014	55	55		55	Square D
Flower Mound HS - J.A.C. - Roof - Flat	20	2014	55	55		55	Mod Bit
Flower Mound HS - J.A.C. - Electrical Panels	30	2014	70	70		70	
Flower Mound HS - J.A.C. - Fire Safety - Sprinkler System	50	2014	82	82		82	
Flower Mound HS - J.A.C. - Gym Flooring	40	2014	78	78		78	
Flower Mound HS - J.A.C. - Bleachers	30	2014	70	70		70	Retractable
Flower Mound HS - J.A.C. - Restrooms	20	2014	55	55		55	
Flower Mound HS - J.A.C. - Scoreboard	20	2014	55	55		55	Spectrum
Flower Mound HS - J.A.C. - Locker Room Flooring	20	2014	55	55		55	Epoxy
Flower Mound HS - J.A.C. - Locker Room Benches	50	2014	82	82		82	Concrete
Flower Mound HS - J.A.C. - Locker Room Lockers	40	2014	78	78		78	
Flower Mound HS - Field House 1999 -HVAC	20	2021	90	90		90	
Flower Mound HS - Field House 1999 - Roof - Flat	20	2021	90	90		90	
Flower Mound HS - Field House 1999 - Electrical Panels	30	1999	20	20		20	Square D
Flower Mound HS - Field House 1999 - Fire Safety - Sprinkler System	50	1999	52	52		52	
Flower Mound HS - Field House 1999 - Flooring - VCT	20	2018	75	75		75	
Flower Mound HS - Field House 1999 - Locker Room Flooring	20	2018	75	75		75	
Flower Mound HS - Field House 1999 - Locker Room Benches	20	2018	75	75		75	Linex
Flower Mound HS - Field House 1999 - Locker Room Lockers	40	1999	40	35		38	
Flower Mound HS - Field House 1999 - Paint - Exterior	20	2021	90	90		90	
INDOOR ATHLETIC CENTER 2013							

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Flower Mound HS - IAC - HVAC	20	2013	50	40		45	
Flower Mound HS - IAC - Roof - Metal	30	2013	67	67		67	
Flower Mound HS - IAC - Electrical Panels	30	2013	67	67		67	EATON
Flower Mound HS - IAC - Fire Safety - Alarm System	20	2013	50	50		50	EST 3 - has own account
Flower Mound HS - IAC - Fire Safety - Sprinkler System	50	2013	80	80		80	
Flower Mound HS - IAC - Artificial Turf	15	2013	33	20		27	Repairs, Leveled and cleaned 2021; damaged from weights
Flower Mound HS - IAC - Weight Room Flooring	20	2023	100	100		100	Athletics replaced flooring Summer 2023
Flower Mound HS - IAC - Paint	20	2013	50	50		50	Lower walls 2019
Flower Mound HS - IAC - Paint - Exterior	20	2013	50	50		50	
SPORTS COMPLEX 2014							
Flower Mound HS - Sports Complex -Parking Lots	50	2014	82	82		82	
Flower Mound HS - Sports Complex - Exterior Lighting	20	2014	55	55		55	LED
BASEBALL FIELD 2014							
Flower Mound HS - Baseball Field Bleachers	40	2014	78	78		78	
Flower Mound HS - Baseball Field Backstop Netting	15	2014	40	40		40	minor repairs in 2019 & 2021
Flower Mound HS - Baseball Field Scoreboard	20	2014	55	55		55	LED wireless; Spectrum
Flower Mound HS - Baseball Field Pressbox	20	2014	55	55		55	
Flower Mound HS - Baseball Field Dugout Paint	15	2014	40	40		40	
Flower Mound HS - Baseball Field Light poles	30	2014	70	70		70	
Flower Mound HS - Baseball Field Leveling	4	2021	50	50		50	High Traffic/Use
Flower Mound HS - Baseball Field Batting Cage	20	2014	55	55		55	Added new lighting in 2017; flooring coming up in spots; Athletics is replacing turf 2023
Restrooms / Concession							
Flower Mound HS - Baseball Field Concession HVAC	20	2014	55	55		55	
Flower Mound HS - Baseball Field Concession Roof - Metal	30	2014	70	70		70	
Flower Mound HS - Baseball Field Concession Flooring	20	2014	55	55		55	Epoxy & concrete
SOFTBALL FIELD 2014							
Flower Mound HS - Softball Field Bleachers	40	2014	78	78		78	
Flower Mound HS - Softball Field Restrooms	-					-	Shared with Baseball
Flower Mound HS - Softball Field Backstop Netting	15	2014	40	40		40	Minor repairs 2019
Flower Mound HS - Softball Field Scoreboard	20	2014	55	55		55	LED - Wireless; Spectrum
Flower Mound HS - Softball Field Pressbox	20	2014	55	55		55	
Flower Mound HS - Softball Field Dugout Paint	15	2014	40	40		40	
Flower Mound HS - Softball Field Light poles	30	2014	70	70		70	MUSCO
Flower Mound HS - Softball Field Leveling	4	2020	25	25		25	2023/24 renovation & laser grade scheduled
Flower Mound HS - Softball Field Batting Cage	20	2014	55	55		55	
Flower Mound HS - Softball Field Concession	-					-	Shared with Baseball
TENNIS COURTS 2014							
Flower Mound HS - Tennis Courts	50	2014	82	82		82	12 Courts; Ironite rock causing chips in surface
Flower Mound HS - Tennis Courts Resurfaced	10	2014	10	10		10	2019 repairs made & look good; some minor chipping outside of play area
Flower Mound HS - Tennis Courts Light Poles	30	2014	70	70		70	18 for all 12 courts
Flower Mound HS - Tennis Courts Shade Structure	20	2014	55	55		55	

Hebron HS

Year Built / Age 1999 / 24

Campus Square Footage 611,264

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1999**	**52**				
MAIN CAMPUS							
Hebron HS - HVAC - Original	**20**	**2021**	90	85		**88**	**RTU**
Hebron HS - HVAC - 2002 Addition	**20**	**2002**	-5	10	5%	**2**	**Auditorium, classroom wings, RTU**
Hebron HS - HVAC - 2008 Addition	**20**	**2008**	25	25	5%	**26**	**Gym, Wrestling, Fine Arts, RTU**
Hebron HS - HVAC - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box & Fine Art Addition**
Hebron HS - HVAC - Controls	**20**	**2021**	90	90		**90**	**Controls = I/net; Locker Rms = Reliable; Additions 2002 & 2008**
Hebron HS - Ceiling and Lights -Original	**20**	**2021**	90	90		**90**	**LED; Digital**
Hebron HS - Ceiling and Lights - 2002 Addition	**20**	**2002**	-5	10		**3**	**Auditorium House Lights, Classroom wings**
Hebron HS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**Gym, Wrestling, Fine Arts, RTU**
Hebron HS - Ceiling and Lights - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box & Fine Art Addition**
Hebron HS - Roof - Flat - Original	**20**	**2021**	90	90		**90**	**Mod Bit**
Hebron HS - Root - Flat - 2002 Addition	**20**	**2002**	-5	5	20%	**0**	**4 ply; Auditorium, classroom wings**
Hebron HS - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	20%	**30**	**4 ply; Gym, Wrestling, Fine Arts**
Hebron HS - Roof - Flat - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box & Fine Art Addition**
Hebron HS - Electrical Switchgear - Original	**30**	**1999**	20	20	4%	**21**	
Hebron HS - Electrical Panels - 2002 Addition	**30**	**2002**	30	30	4%	**31**	**Auditorium, classroom wings**
Hebron HS - Electrical Panels - 2008 Addition	**30**	**2008**	50	50	4%	**52**	**Gym, Wrestling, Fine Arts**
Hebron HS - Electrical Panels - 2022 Addition	**30**	**2022**	97	97		**97**	**Black Box & Fine Art Addition**
Hebron HS - Elevator #1 (main)	**25**	**2022**	96	96	20%	**100**	**Smartwise**
Hebron HS - Elevator #2 (Stadium)	**25**	**2003**	20	10	19%	**18**	**Schindler**
Hebron HS - Elevator #3 (Arena)	**25**	**2021**	92	92	20%	**100**	**Otis**
Hebron HS - Lift (Auditorium)	**25**	**2001**	12	12		**12**	**Nat'l Wheel-O-Vator**
Hebron HS - Lift (Softball Press Box)	**-**					**-**	**Removed 7/2019**
Hebron HS - Lift (Baseball Press Box)	**-**					**-**	**Removed 7/2020**
Hebron HS - Fire Safety - Fire Alarm	**20**	**2021**	90	90		**90**	**Edwards EST 3**
Hebron HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Hebron HS - Fire Safety - Sprinkler System - Original	**50**	**1999**	52	52	-5%	**50**	
Hebron HS - Fire Safety - Sprinkler System - 2002 Addition	**50**	**2002**	58	58	-5%	**55**	**Auditorium, classroom wings**
Hebron HS - Fire Safety - Sprinkler System - 2008 Addition	**50**	**2008**	70	70	-5%	**67**	**Gym, Wrestling, Fine Arts**
Hebron HS - Fire Safety - Sprinkler System - 2022 Addition	**50**	**2022**	98	98		**98**	**Black Box & Fine Art Addition**
Hebron HS - Storm Shelter - 2022 Addition	**50**	**2022**	98	98		**98**	**Black Box**
Hebron HS - Food Service Boilers	**20**	**2011**	40	40		**40**	**Tank**
Hebron HS - Food Service Freezers	**20**	**2021**	90	90		**90**	
Hebron HS - Generator	**40**	**2021**	95	95		**95**	**Cummins - Diesel; 80 KW; supplies MAC & IAC**
Hebron HS - Flooring - Classrooms - VCT	**20**	**2021**	90	90		**90**	
Hebron HS - Flooring - Corridors - VCT	**20**	**2021**	90	90		**90**	**VCT**
Hebron HS - Flooring - Library	**20**	**2020**	85	85		**85**	**LVT**
Hebron HS - Flooring - Offices	**20**	**2020**	85	85		**85**	**VCT**
Hebron HS - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Hebron HS - Flooring - Kitchen	**50**	**1999**	52	52		**52**	**Terrazzo**
Hebron HS - Flooring - Band	**20**	**2008**	25	25		**25**	**VCT**
Hebron HS - Flooring - Choir	**20**	**2021**	90	90		**90**	**VCT**
Hebron HS - Flooring - Orchestra	**20**	**2021**	90	90		**90**	**VCT**
Hebron HS - Flooring - Stairs	**20**	**2021**	90	90		**90**	
Hebron HS - Flooring - 2022 **Black Box & Fine Arts Addition**	**20**	**2022**	95	95		**95**	**VCT**
Hebron HS - Plastic Laminate	**40**	**2002**	48	48		**48**	
Hebron HS - Doors	**20**	**2021**	90	90		**90**	
Hebron HS - Door Hardware	**20**	**2021**	90	90		**90**	
Hebron HS - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	
Hebron HS - Restrooms - Faculty	**20**	**2021**	90	90		**90**	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Hebron HS - Restrooms - Student	20	2021	90	90		90	
Hebron HS - Restrooms - 2002 Addition	20	2021	90	90		90	
Hebron HS - Restrooms - 2008 Addition	20	2008	25	25		25	
Hebron HS - Marquee	15	2020	80	80		80	LED; Digital
Hebron HS - Paving - Parking Lots	50	1999	52	52		52	
Hebron HS - Paving - Parking Lots	50	2009	72	72		72	
Hebron HS - Paving - Sidewalks	40	1999	40	40		40	
Hebron HS - Exterior Lighting	20	2020	85	85		85	Still need additional pole lights campus to stadium on west
Hebron HS - Paint - Commons	15	2021	87	87		87	
Hebron HS - Paint - Cafeteria	15	2021	87	87		87	
Hebron HS - Paint - Auditorium	15	2015	47	47		47	
Hebron HS - Paint - Gyms	20	2022	95	95		95	
Hebron HS - Paint - Exterior	20	2022	95	95		95	
Hebron HS - Paint - Hallways	20	2022	95	95		95	
Hebron HS - Cafetorium - Curtains	20	2021	90	90		90	
Hebron HS - Cafetorium - Lighting	25	2021	92	92		92	
Hebron HS - Auditorium Curtains	20	2017	70	70		70	Additional curtains replaced Summer 2022
Hebron HS - Auditorium Stage Lighting	20	2002	-5	10		3	
Hebron HS - Auditorium Sound		2014				-	Tracking Replacement Yr only - In Technology Dept. Plans
Hebron HS - Auditorium Seating	20	2002	-5	10		3	
Hebron HS - Auditorium Flooring	15	2017	60	60		60	
Hebron HS - Large Gym - Flooring	40	1999	40	40		40	2018 Sanded and painted (2nd sanding)
Hebron HS - Large Gym - Bleachers	30	1999	20	20		20	Retractable
Hebron HS - Large Gym - Scoreboard	20	1999	-20	5		-8	
Hebron HS - Middle Gym - Flooring	40	1999	40	40		40	2018 Sanded and painted (2nd sanding)
Hebron HS - Middle Gym - Bleachers	30	1999	20	20		20	
Hebron HS - Middle Gym - Scoreboard	20	1999	-20	5		-8	
Hebron HS - 2008 Gym - Flooring	20	2008	25	15		20	Rubber (cracking)
Hebron HS - 2008 Gym - Bleachers	30	2008	50	50		50	
Hebron HS - Girls Locker Rooms - Flooring	20	2008	25	25		25	Epoxy
Hebron HS - Girls Locker Rooms - Benches	20	2015	60	60		60	Linex
Hebron HS - Girls Locker Rooms - Partitions	20	2008	25	25		25	
Hebron HS - Boys Locker Rooms - Flooring	20	2021	90	90		90	Epoxy
Hebron HS - Boys Locker Rooms - Benches	20	2015	60	60		60	Linex
Hebron HS - Boys Locker Rooms - Partitions	20	2021	90	90		90	Solid Plastic
STADIUM 2003							
Hebron HS - Stadium Bleachers	40	2003	50	45		48	
Hebron HS - Stadium Artificial Turf	8	2021	75	75		75	
Hebron HS - Stadium Synthetic Track	10	2013	0	10		5	Repainted/Repaired 2018; drainage problems; additional minor repairs in 2022
Hebron HS - Stadium PA System		2013				-	Tracking Replacement Yr only - In Technology Dept. Plans
Hebron HS - Stadium Light poles	30	2014	70	70		70	
Hebron HS - Stadium Scoreboard	18	2003	-11	5		-3	
Hebron HS - Stadium Pressbox HVAC	20	2003	0	5		3	
Hebron HS - Stadium Pressbox Roof	20	2003	0	5		3	2 PLY Mod bit
Hebron HS - Stadium Pressbox Flooring	20	2019	80	80		80	VCT; interior walls painted 2017
Hebron HS - Stadium Ticket Booth(s)	20	2003	0	5		3	
Hebron HS - Stadium Restrooms / Concession - Home - HVAC	20	2010	35	25		30	Package unit on concessions installed by booster; restroom HVAC needs
Hebron HS - Stadium Restrooms / Concession - Home - Roof - Flat	20	2003	0	5		3	
Hebron HS - Stadium Restrooms / Concession - Home - Flooring	50	2003	60	60		60	Concrete
Hebron HS - Stadium Restrooms / Concession - Visitor - Roof	20	2003	0	5		3	Shingled
Hebron HS - Stadium Restrooms - Visitor	20	2003	0	5		3	Painted 2018
Hebron HS - Stadium Band Tower	50						In Progress
Hebron HS - Lightning Dectection		2023				-	Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
Hebron HS - Field House 2010 - HVAC	20	2010	35	35		35	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Hebron HS - Field House 2010 - Roof - Metal	30	2010	57	57		57	
Hebron HS - Field House 2010 - Electrical Panels	30	2010	57	57		57	
Hebron HS - Field House 2010 - Fire Safety - Alarm System	20	2010	35	35		35	Tied to Main Bldg, Warning detection devices only
Hebron HS - Field House 2010 - Fire Safety - Sprinkler System	50	2010	74	74		74	
Hebron HS - Field House 2010 - Flooring - Carpet	15	2010	13	13		13	
Hebron HS - Field House 2010 - Flooring - Epoxy	20	2010	35	35		35	
Hebron HS - Field House 2010 - Flooring - Concrete/Terrazzo	50	2010	74	74		74	
Hebron HS - Field House 2010 - Restrooms	20	2010	35	30		33	CT floors, CT walls
Hebron HS - Field House 2010 - Restrooms - Coaches	20	2010	35	35		35	
Hebron HS - Field House 2010 - Lockers	40	2010	68	60		64	
Hebron HS - Field House 2010 - Benches	50	2010	74	74		74	Concrete
Hebron HS - Field House 2010 - Paint	15	2010	13	15		14	Hallways & Locker rms painted 2015
Hebron HS - Field House 2010 - Exterior Lighting	20	2010	35	35		35	
OLD FIELD HOUSE / WEIGHT ROOM / INDOOR TURF 2003							
Hebron HS - IAC/ Weight Room/ Field House 2003 - HVAC	20	2003	0	10		5	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Roof - Flat	20	2003	0	10		5	4 Ply Built Up
Hebron HS - IAC/ Weight Room/ Field House 2003 - Electrical Panels	30	2003	33	33		33	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Fire Safety - Alarm System	20	2003	0	10		5	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Fire Safety - Sprinkler System	50	2003	60	60		60	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Artificial Turf	15	2003	-33	10		-12	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Flooring - VCT	20	2003	0	10		5	VCT
Hebron HS - IAC/ Weight Room/ Field House 2003 - Locker Room Flooring	20	2003	0	5		3	Epoxy
Hebron HS - IAC/ Weight Room/ Field House 2003 - Locker Room Benches	20	2014	55	40		48	Linex
Hebron HS - IAC/ Weight Room/ Field House 2003 - Locker Room Lockers	40	2020	93	93		93	JV -2019; Varsity - 2020; all new lockers
Hebron HS - IAC/ Weight Room/ Field House 2003 - Weight room flooring	20	2023	100	100		100	Athletics replaced flooring Summer 2023
Hebron HS - IAC/ Weight Room/ Field House 2003 - Paint	15	2016	53	53		53	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Paint - Exterior	20	2003	0	10		5	Doors/Post/Rails new 2016
H.A.C. 2021							
Hebron HS - H.A.C. - Fire Safety - Alarm System	20	2021	90	90		90	
Hebron HS - H.A.C. - HVAC	20	2021	90	90		90	
Hebron HS - H.A.C. - Roof - Flat	20	2021	90	90		90	
Hebron HS - H.A.C. - Electrical Panels	30	2021	93	93		93	
Hebron HS - H.A.C. - Fire Safety - Sprinkler System	50	2021	96	96		96	
Hebron HS - H.A.C. - Gym Flooring	40	2021	95	95		95	
Hebron HS - H.A.C. - Bleachers	30	2021	93	93		93	
Hebron HS - H.A.C. - Restrooms	20	2021	90	90		90	
Hebron HS - H.A.C. - Scoreboard	20	2021	90	90		90	
Hebron HS - H.A.C. - Locker Room Flooring	20	2021	90	90		90	
Hebron HS - H.A.C. - Locker Room Benches	50	2021	96	96		96	concrete
Hebron HS - H.A.C. - Locker Room Lockers	40	2021	95	95		95	
BASEBALL FIELD 1999							
Hebron HS - Baseball Field Bleachers	40	1999	40	40		40	
Hebron HS - Baseball Field Restrooms	-					-	See stadium visitor restrooms
Hebron HS - Baseball Field Backstop Netting	15	2019	73	73		73	Replaced netting between 2018, 2019, & 2022
Hebron HS - Baseball Field Scoreboard	20	2016	65	65		65	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Hebron HS - Baseball Field Pressbox	20	2003	0	10		5	
Hebron HS - Baseball Field Dugout Paint	15	2023	100	100		100	
Hebron HS - Baseball Field Light poles	30	1999	20	15		18	
Hebron HS - Baseball Field Leveling	4	2022	75	75		75	High Traffic/use
Hebron HS - Baseball Field Batting Cage	20	2012	45	45		45	Athletics is replacing turf 2023
Hebron HS - Baseball Field Concession	20	2006	15	15		15	Shared with softball
SOFTBALL FIELD 1999							
Hebron HS - Softball Field Bleachers	40	1999	40	20		30	
Hebron HS - Softball Field Restrooms	-					-	See stadium visitor restrooms
Hebron HS - Softball Field Backstop Netting	15	2010	13	13		13	Minor repairs to nets in 2019
Hebron HS - Softball Field Scoreboard	20	2016	65	65		65	Spectrum
Hebron HS - Softball Field Pressbox	20	2003	0	5		3	
Hebron HS - Softball Field Dugout Paint	15	2023	100	100		100	
Hebron HS - Softball Field Light poles	30	1999	20	20		20	
Hebron HS - Softball Field Leveling	4	2020	25	25		25	renovation scheduled for 2023/24 and top edges
Hebron HS - Softball Field Batting Cage	20	2012	45	45		45	New nets 2019
Hebron HS - Softball Field Concession	-					-	Shared with baseball
TENNIS COURTS 2019							
Hebron HS - Tennis Courts	50	2019	92	92		92	12 Courts
Hebron HS - Tennis Courts - Resurfaced	10	2019	60	60		60	
Hebron HS - Tennis Courts - Light Poles	30	2019	87	87		87	
Hebron HS - Tennis Courts Shade Structure	20	2019	80	80		80	

Lewisville HS

Year Built / Age 1968 Rebuilt 2012 / 11

Campus Square Footage 449,867

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2012**	**78**				
MAIN CAMPUS							
Lewisville HS - HVAC - 1999 Addition	**20**	**2008**	25	25	-4%	**24**	**Classrooms, Fine Arts, CHILLER**
Lewisville HS - HVAC - 2008 Addition	**20**	**2008**	25	25	-4%	**24**	**Science Wing, CHILLER**
Lewisville HS - HVAC - 2012 Addition	**20**	**2012**	45	45	-4%	**43**	**Main Campus, CHILLER**
Lewisville HS - HVAC - 2014 Addition	**20**	**2014**	55	55	-4%	**53**	**Auditorium, CHILLER**
Lewisville HS - HVAC - 2022 Addition	**20**	**2022**	95	95		**95**	**RTU - Fine Arts Addition**
Lewisville HS - HVAC - Controls	**20**	**2012**	45	45		**45**	**Controls = Alerton**
Lewisville HS - Ceiling and Lights - 1999 Addition	**20**	**2014**	55	55		**55**	**Classrooms, Fine Arts; T-5**
Lewisville HS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**Science Wing; T-5**
Lewisville HS - Ceiling and Lights - 2012 Addition	**20**	**2012**	45	45		**45**	**Main Campus; T-5**
Lewisville HS - Ceiling and Lights - 2014 Addition	**20**	**2014**	55	55		**55**	**Auditorium House Lights; T-5**
Lewisville HS - Ceiling and Lights - 2022 Addition	**20**	**2022**	95	95		**95**	**Fine Arts Addition**
Lewisville HS - Roof - 1999 Addition	**20**	**1999**	-20	5	-5%	**-8**	**Classrooms, Fine Arts; 4 ply Built up**
Lewisville HS - Roof - 2008 Addition	**20**	**2008**	25	25	-5%	**24**	**Science Wing**
Lewisville HS - Roof - 2012 Addition	**20**	**2012**	45	45	-5%	**43**	**Main Campus**
Lewisville HS - Roof - 2014 Addition	**20**	**2014**	55	55	-5%	**52**	**Auditorium**
Lewisville HS - Roof - 2022 Addition	**20**	**2022**	95	95		**95**	**Fine Arts Addition**
Lewisville HS - Elect Switchgear - 1999 Addition	**30**	**2012**	63	63	-10%	**57**	**Classrooms, Fine Arts**
Lewisville HS - Elect Panels - 2008 Addition	**30**	**2008**	50	50	-10%	**45**	**Science Wing**
Lewisville HS - Elect Panels - 2012 Addition	**30**	**2012**	63	63	-10%	**57**	**Main Campus**
Lewisville HS - Elect Panels - 2014 Addition	**30**	**2014**	70	70	-10%	**63**	**Auditorium**
Lewisville HS - Elect Panels - 2022 Addition	**30**	**2022**	97	97		**97**	**Fine Arts Addition**
Lewisville HS - Elevator #1 (Café/Arena)	**25**	**2011**	52	52	14%	**59**	**Schindler**
Lewisville HS - Elevator #2 (D-Wing)	**25**	**2008**	40	40	19%	**48**	**Thyssen Krupp**
Lewisville HS - Elevator #3 (E- Wing)	**25**	**1999**	4	10	20%	**8**	**Dover**
Lewisville HS - Elevator #4 (Goldsmith Stadium)	**25**	**2021**	92	92	20%	**100**	**Schindler Electric**
Lewisville HS - Elevator #5 (FB Field House)	**25**	**2010**	48	48	20%	**57**	**Schindler**
Lewisville HS - Lift (Rm A205-ROTC)	**25**	**2011**	52	52		**52**	**Garaventa**
Lewisville HS - Fire Safety - Fire Alarm	**20**	**2012**	45	0	-17%	**19**	**Harrington - No longer supported**
Lewisville HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Lewisville HS - Fire Sprinkler Sys - 1999 Add	**50**	**1999**	52	52	5%	**55**	**Classrooms, Fine Arts**
Lewisville HS - Fire Sprinkler Sys - 2008 Add	**50**	**2008**	70	70	5%	**73**	**Science Wing**
Lewisville HS - Fire Sprinkler Sys - 2012 Add	**50**	**2012**	78	78	5%	**82**	**Main Campus**
Lewisville HS - Fire Sprinkler Sys - 2014 Add	**50**	**2014**	82	82	5%	**86**	**Auditorium**
Lewisville HS - Fire Sprinkler Sys - 2022 Add	**50**	**2022**	98	98		**98**	**Fine Arts Addition**
Lewisville HS - Storm Shelter - 2022 Add	**50**	**2022**	98	98		**98**	**Athletics Addition**
Lewisville HS - Food Service Boilers	**20**	**2011**	40	40		**40**	
Lewisville HS - Food Service Freezers	**20**	**2012**	45	45		**45**	
Lewisville HS - Generator	**40**	**2012**	73	73		**73**	**Generac - Diesel; 600 KW; new water pump 2021**
Lewisville HS - Flooring - Classrooms	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Classrms - 2008 Add	**20**	**2008**	25	25		**25**	**VCT**
Lewisville HS - Flooring - Corridors	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Library	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Offices	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Cafeteria	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Kitchen	**50**	**2012**	78	78		**78**	**Terrazzo**
Lewisville HS - Flooring - Band	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Choir	**15**	**2012**	27	27		**27**	**Carpet**
Lewisville HS - Flooring - Orchestra	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	**VCT**
Lewisville HS - Plastic Laminate	**40**	**2008**	63	63		**63**	
Lewisville HS - Doors	**20**	**2012**	45	45		**45**	
Lewisville HS - Door Hardware	**20**	**2012**	45	45		**45**	
Lewisville HS - Casework (Built-Ins)	**20**	**2012**	45	45		**45**	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Lewisville HS - Restrooms - Faculty	20	2012	45	45		45	Ceramic tile
Lewisville HS - Restrooms - Student	20	2012	45	50		48	CMU Partitions, Ceramic tile floors/walls
Lewisville HS - Restrooms - 1999 Addition	20	1999	-20	25		3	Solid plastic Partitions; Partial Renovations
Lewisville HS - Restrooms - 2008 Addition	20	2008	25	25		25	
Lewisville HS - Restrooms - 2012 Addition	20	2012	45	45		45	
Lewisville HS - Restrooms - 2014 Addition	20	2014	55	55		55	
Lewisville HS - Marquee	15	2014	40	40		40	Brick, LED; Digital
Lewisville HS - Paving - Parking Lots	20	2005	10	15		13	Stadium & Band: Asphalt; Band 2021; need additional poles
Lewisville HS - Paving - Parking Lots	50	1994	42	42		42	Along / closest to Main Street, Concrete
Lewisville HS - Paving - Parking Lots	50	2012	78	78		78	Front of school, Concrete
Lewisville HS - Paving - Sidewalks	40	2012	73	73		73	
Lewisville HS - Exterior Lighting	20	2012	45	45		45	
Lewisville HS - Paint - Commons	15	2012	27	30		28	
Lewisville HS - Paint - Cafeteria	15	2012	45	45		45	
Lewisville HS - Paint - Auditorium	15	2012	27	27		27	
Lewisville HS - Paint - F.A.C.	15	2012	27	27		27	
Lewisville HS - Paint - Gyms	20	2012	45	45		45	
Lewisville HS - Paint - Exterior	20	2012	45	45		45	
Lewisville HS - Paint - Hallways	20	2012	45	40		43	P-Lam to 7'-0"; CMU not sealed
Lewisville HS - Cafetorium - Curtains	20	2012	45	45		45	
Lewisville HS - Cafetorium - Lighting	25	2012	56	56		56	T-5
Lewisville HS - Auditorium Curtains	20	2014	55	55		55	
Lewisville HS - Auditorium Stage Lighting	25	2014	64	55		60	
Lewisville HS - Auditorium Sound		2017				-	Tracking Replacement Yr only - In Technology Dept. Plans
Lewisville HS - Auditorium Seating	20	2014	55	55		55	
Lewisville HS - Auditorium Flooring	15	2014	40	10		25	Carpet
Lewisville HS - F.A.C. - Flooring	40	2012	73	73		73	Wood; Sanded and Refinished 2020
Lewisville HS - F.A.C. - Bleachers	30	2012	63	63		63	Retractable
Lewisville HS - F.A.C. - Restrooms	20	2012	45	45		45	
Lewisville HS - F.A.C. - Scoreboard	20	2012	45	45		45	
Lewisville HS - Gym 1 - Flooring	40	2012	73	73		73	Sanded and Refinished 2020
Lewisville HS - Gym 1- Bleachers	30	2012	63	63		63	
Lewisville HS - Gym 1 - Scoreboard	20	2012	45	45		45	
Lewisville HS - Gym 2 - Flooring	40	2012	73	73		73	Sanded and Refinished 2020
Lewisville HS - Locker Rooms - Flooring	20	2012	45	45		45	Epoxy
Lewisville HS - Locker Rooms - Benches	50	2012	78	78		78	Concrete
Lewisville HS - Locker Rooms - Lockers	40	2012	73	73		73	
Lewisville HS - Locker Rooms - Partitions	20	2012	45	45		45	CMU
STADIUM							
Lewisville HS - Stadium Bleachers	50	1971	-4	35		16	Homeside underneath/structure painted 2018; Visitor 2019
Lewisville HS - Stadium Bleachers Addition	50	1982	18	35		27	
Lewisville HS - Stadium Artificial Turf	8	2020	63	63		63	
Lewisville HS - Stadium Synthetic Track	10	2012	-10	15		3	minor fading; Summer 2022 repairs
Lewisville HS - Stadium PA System		2021				-	Tracking Replacement Yr only - In Technology Dept. Plans
Lewisville HS - Stadium Light poles	30	2009	53	53		53	Poles only 2009, due to storm damage
Lewisville HS - Stadium Scoreboard	18	2003	-11	5		-3	Fair Play
Lewisville HS - Stadium Pressbox HVAC	20	2021	90	90		90	
Lewisville HS - Stadium Pressbox Roof	30	2021	93	93		93	
Lewisville HS - Stadium Pressbox Flooring	15	2021	87	87		87	Carpet tiles and tile
Lewisville HS - Stadium Ticket Booth(s)	20	2021	90	90		90	
Lewisville HS - Stadium Concession - Home - HVAC	20	2021	90	90		90	
Lewisville HS - Stadium Concession - Home - Roof	20	2021	90	90		90	
Lewisville HS - Stadium Concession - Visitor - HVAC	20	2021	90	90		90	
Lewisville HS - Stadium Concession - Visitor - Roof	20	2021	90	90		90	
Lewisville HS - Stadium Restrooms- Home	20	2021	90	90		90	
Lewisville HS - Stadium Restrooms - Visitor	20	2021	90	90		90	
Lewisville HS - Stadium Band Tower	50	2023	100	100		100	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Lewisville HS - Lightning Detection		2023					Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
Lewisville HS - Field House 2010 - HVAC	20	2010	35	35		35	
Lewisville HS - Field House 2010 - Roof - Metal	30	2010	57	57		57	
Lewisville HS - Field House 2010 - Electrical Panels	30	2010	57	57		57	
Lewisville HS - Field House 2010 - Fire Safety - Alarm System	20	2010	35	35		35	Tied into Main Bldg, Warning detection devices only
Lewisville HS - Field House 2010 - Fire Safety - Sprinkler System	50	2010	74	74		74	
Lewisville HS - Field House 2010 - Flooring - Carpet	15	2010	13	13		13	Offices
Lewisville HS - Field House 2010 - Flooring - Epoxy	20	2010	35	35		35	
Lewisville HS - Field House 2010 - Flooring - Concrete/Terrazzo	50	2010	74	74		74	
Lewisville HS - Field House 2010 - Restrooms	20	2010	35	40		38	CMU partitions, ceramic tile
Lewisville HS - Field House 2010 - Restrooms - Coaches	20	2010	35	35		35	Ceramic tile
Lewisville HS - Field House 2010 - Lockers	40	2010	68	68		68	
Lewisville HS - Field House 2010 - Benches	50	2010	74	74		74	Concrete
Lewisville HS - Field House 2010 - Paint	15	2017	60	60		60	
Lewisville HS - Field House 2010 - Exterior Lighting	20	2010	35	35		35	Wall Packs
Wrestling Building & Trainers Rm - 2021							
Lewisville HS - Wrestling & Trainers 2021 - HVAC	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Roof - Flat	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Electrical Panels	30	2021	93	93		93	
Lewisville HS - Wrestling & Trainers 2021 - Fire Safety - Alarm System	20	2021	90	90		90	Tied into Main Bldg, Warning detection devices only
Lewisville HS - Wrestling & Trainers 2021 - Fire Safety - Sprinkler System	50	2021	96	96		96	
Lewisville HS - Wrestling & Trainers 2021 - Flooring - Girls Wrestling -Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 -Girls Wrestling - Benches	50	2021	96	96		96	Concrete
Lewisville HS - Wrestling & Trainers 2021 - Girls Restroom	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 -Girls Wrestling - Locker	40	2021	95	95		95	
Lewisville HS - Wrestling & Trainers 2021 - Boys Restrooms	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Flooring - Boys Wrestling- Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Flooring - Boys Wrestling- Benches	50	2021	96	96		96	Concrete
Lewisville HS - Wrestling & Trainers 2021 -Boys Wrestling - Locker	40	2021	95	95		95	
Lewisville HS - Wrestling & Trainers 2021 - Trainers Rm Flooring - RAF	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Wrestling Room	20	2021	90	90		90	Concrete & VCT
Lewisville HS - Wrestling & Trainers 2021 - Paint	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Paint - Exterior	20	2021	90	90		90	
INDOOR ATHLETIC CENTER 1996							
Lewisville HS - IAC 1996 - HVAC	20	1996	-35	10		-13	Heaters only; offices have split systems
Lewisville HS - IAC 1996 - Roof - Metal	30	1996	10	10		10	
Lewisville HS - IAC 1996 - Electrical Panels	30	1996	10	10		10	
Lewisville HS - IAC 1996 - Fire Safety - Alarm System	-					-	
Lewisville HS - IAC 1996 - Fire Safety - Sprinkler System	-					-	
Lewisville HS - IAC 1996 - Turf	15	2008	0	10		5	Some turf removed to create a weight room
Lewisville HS - IAC 1996 - Girls Weight Room - Flooring	20	2013	50	50		50	
Lewisville HS - IAC 1996 - Paint	15	2017	60	60		60	Interior lower walls painted 2018
Lewisville HS - IAC 1996 - Paint - Exterior	20	2021	90	90		90	
WEIGHT ROOM 2003							
Lewisville HS - Weight Room 2003 - HVAC	20	2003	0	0		0	Trane Condensing units replaced 2021

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Lewisville HS - Weight Room 2003 - Roof - Metal	30	2003	33	33		33	
Lewisville HS - Weight Room 2003 - Electrical Panels	30	2003	33	33		33	New LED lights 2022
Lewisville HS - Weight Room 2003 - Fire Safety - Alarm System	-					-	
Lewisville HS - Weight Room 2003 - Fire Safety - Sprinkler System	-					-	
Lewisville HS - Weight Room 2003 - Flooring - Rubber	20	2021	90	90		90	
Lewisville HS - Weight Room 2003 - Paint	15	2021	87	87		87	
BOYS TRACK 2003							
Lewisville HS - Boys Track - HVAC	20	2003	0	5		3	
Lewisville HS - Boys Track - Roof - Flat	20	2003	0	5		3	
Lewisville HS - Boys Track - Electrical Panels	30	2003	33	33		33	
Lewisville HS - Boys Track - Fire Safety - Alarm System	-					-	
Lewisville HS - Boys Track - Fire Safety - Sprinkler System	-					-	
Lewisville HS - Boys Track - Flooring - Epoxy	20	2003	0	10		5	
Lewisville HS - Boys Track - Restroom	20	2003	0	10		5	Solid plastic, ceramic tile floor/walls
Lewisville HS - Boys Track - Lockers	40	2003	50	40		45	
Lewisville HS - Boys Track - Benches	20	2009	30	0		15	Epoxy
Lewisville HS - Boys Track - Paint	15	2021	87	87		87	
Lewisville HS - Boys Track - Paint - Exterior	20	2021	90	90		90	
CC, GOLF, G SOCCER & BASEBALL 2021							
Lewisville HS - CC, Golf, G Soccer & Baseball - HVAC	20	2021	90	90		90	
Lewisville HS - CC, Golf, G Soccer & Baseball - Roof - Metal	30	2021	93	93		93	
Lewisville HS - CC, Golf, G Soccer & Baseball - Electrical Panels	30	2021	93	93		93	
Lewisville HS - CC, Golf, G Soccer & Baseball- Fire Safety - Alarm System	20	2021	90	90		90	Tied into Main Bldg, Warning detection devices only
Lewisville HS - CC, Golf, G Soccer & Baseball- Fire Safety - Sprinkler System	50	2021	96	96		96	
Lewisville HS - Girls Soccer - Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Girls Soccer - Restroom	20	2021	90	90		90	
Lewisville HS - Girls Soccer - Lockers	40	2021	95	95		95	
Lewisville HS - Girls Soccer - Benches	50	2021	96	96		96	
Lewisville HS - Girls CC - Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Girls CC - Restroom	20	2021	90	90		90	
Lewisville HS - Girls CC - Lockers	40	2021	95	95		95	
Lewisville HS - Girls CC - Benches	50	2021	96	96		96	concrete
Lewisville HS - Boys CC - Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Boys CC - Restroom	20	2021	90	90		90	
Lewisville HS - Boys CC - Lockers	40	2021	95	95		95	
Lewisville HS - Boys CC - Benches	50	2021	96	96		96	concrete
Lewisville HS - Baseball - Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Baseball - Restroom	20	2021	90	90		90	
Lewisville HS - Baseball - Lockers	40	2021	95	95		95	
Lewisville HS - Baseball - Benches	50	2021	96	96		96	concrete
Lewisville HS - Offices - Flooring - Carpet	15	2021	87	87		87	
Lewisville HS - CC, Golf, G Soccer & Baseball - Paint	20	2021	90	90		90	
BASEBALL FIELD 1978							
Lewisville HS - Baseball Field Bleachers	40	2003	50	50		50	
Lewisville HS - Baseball Field Restrooms	20	2008	25	20		23	
Lewisville HS - Baseball Field Backstop Netting	15	2010	13	5		9	Major wear along top & bottom; needs replacement

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Lewisville HS - Baseball Field Scoreboard	20	2005	10	10		10	Daktronics
Lewisville HS - Baseball Field Pressbox	20	2021	90	90		90	
Lewisville HS - Baseball Field Dugout Paint	15	2017	60	60		60	
Lewisville HS - Baseball Field Lightpoles	30	1991	-7	10		2	
Lewisville HS - Baseball Field Leveling	4	2022	75	75		75	
Lewisville HS - Baseball Field Batting Cages	20	2012	45	45		45	Athletics is replacing turf 2023
Lewisville HS - Baseball Field Concession	20	2003	0	0		0	

Marcus HS

Year Built / Age 1981 / 42

Campus Square Footage 624,467

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1981**	**16**				
MAIN CAMPUS							
Marcus HS - HVAC - Original	**20**	**2005**	10	10	-2%	**10**	**MIX**
Marcus HS - HVAC - 1988 Addition	**20**	**2005**	10	10	-2%	**10**	
Marcus HS - HVAC - 1989 Addition	**20**	**2005**	10	10	-2%	**10**	**SWING**
Marcus HS - HVAC - 1997 Addition	**20**	**1997**	-30	0	-2%	**-15**	**RTU**
Marcus HS - HVAC - 2000 Addition	**20**	**2000**	-15	0	-2%	**-8**	**W-wing; RTU**
Marcus HS - HVAC - 2008 Addition	**20**	**2008**	25	20	-2%	**22**	**Gym; RTU**
Marcus HS - HVAC - 2014 Addition	**20**	**2014**	55	55	-2%	**54**	**M.A.C.; RTU**
Marcus HS - HVAC - Controls	**20**	**2005**	10	10		**10**	**Controls = Alerton**
Marcus HS - Ceiling and Lights - Original	**20**	**2005**	10	10		**10**	**MIX**
Marcus HS - Ceiling and Lights - 2000 Addition	**20**	**2000**	-15	10		**-3**	**W-wing**
Marcus HS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**Gym**
Marcus HS - Ceiling and Lights - 2014 Addition	**20**	**2014**	55	55		**55**	**M.A.C.**
Marcus HS - Roof - Flat - Original	**20**	**2020**	85	85	-9%	**78**	**2017 Storm damage**
Marcus HS - Roof - Flat - 1988 Addition	**20**	**2020**	85	85	-9%	**78**	S-Wing; 2017 Storm damage
Marcus HS - Roof - Flat - 1989 Addition	**20**	**2020**	85	85	-9%	**78**	Auditorium; 2017 Storm damage -**IN PROGRESS**
Marcus HS - Roof - Flat - 1993 Replacement	**20**	**2020**	85	85	-9%	**78**	Original Cafeteria, small gym, band hall; **2017 Storm damage**
Marcus HS - Roof - Flat - 1997 Addition	**20**	**2020**	85	85	-9%	**78**	Middle gym; **2017 Storm damage**
Marcus HS - Roof - Flat - 2000 Addition	**20**	**2020**	85	85	-9%	**78**	Cafeteria expansion, W-wing; 2017 Storm damage
Marcus HS - Roof - Flat - 2008 Addition	**20**	**2020**	85	85	-9%	**78**	Fine Arts; **2017 Storm damage**
Marcus HS - Roof - Flat - 2008 Replacement	**20**	**2020**	85	85	-9%	**78**	Library, Front porch, new gym; 2017 Storm damage
Marcus HS - Roof - Flat - 2010 Replacement	**20**	**2020**	85	85	-9%	**78**	Athletic Area; 2017 Storm damage
Marcus HS - Roof - Flat - 2012 Replacements	**20**	**2020**	85	85	-9%	**78**	Original building areas; 2017 Storm damage
Marcus HS - Roof - Flat - 2014 Addition	**20**	**2020**	85	85	-9%	**78**	M.A.C., Black box; **2017 Storm damage**
Marcus HS - Electrical Switchgear - Original	**30**	**2020**	90	90		**90**	
Marcus HS - Electrical Panels - 1983 Addition	**30**	**2020**	90	90		**90**	
Marcus HS - Electrical Panels - 1988 Addition	**30**	**2020**	90	90		**90**	
Marcus HS - Electrical Panels - 1989 Addition	**30**	**2020**	90	90		**90**	
Marcus HS - Electrical Panels - 2000 Addition	**30**	**2000**	23	23	-4%	**22**	**W-wing**
Marcus HS - Electrical Panels - 2008 Addition	**30**	**2008**	50	50	-4%	**48**	**Fine Arts**
Marcus HS - Electrical Panels - 2014 Addition	**30**	**2014**	70	70	-4%	**70**	**Black box, M.A.C.**
Marcus HS - Elevator #1 (D Hall/Main Office)	**25**	**2010**	48	48	16%	**56**	**Elevator Controls (installed 1970 - Altered in 2010)**
Marcus HS - Elevator #2 (West Wing)	**25**	**1999**	4	10	11%	**8**	**Montgomery**
Marcus HS - Elevator #3 (Arena)	**25**	**2014**	64	64	-6%	**60**	**TKE**
Marcus HS - Elevator #4 (Stadium)	**25**	**2010**	48	40	7%	**47**	**Schindler**
Marcus HS - Lift (Baseball Press Box)	**-**					**-**	**Removed 7/2019**
Marcus HS - Fire Safety - Fire Alarm	**20**	**2014**	55	50	-2%	**51**	**NFS2-3030E**
Marcus HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Marcus HS - Fire Safety - Sprinkler System - Original	**50**	**1989**	32	32	0%	**32**	**Auditorium**
Marcus HS - Fire Safety - Sprinkler Sys - 2000 Addition	**50**	**2000**	54	54	0%	**54**	**W-wing**
Marcus HS - Fire Safety - Sprinkler Sys - 2005 Addition	**50**	**2005**	64	64	0%	**64**	**All other areas**
Marcus HS - Fire Safety - Sprinkler Sys - 2008 Addition	**50**	**2008**	70	70	0%	**70**	**Fine Arts**
Marcus HS - Fire Safety - Sprinkler Sys - 2014 Addition	**50**	**2014**	82	82	0%	**82**	**Black box, M.A.C.**
Marcus HS - Food Service Boilers	**20**	**2014**	55	55		**55**	**Tank 2014**
Marcus HS - Food Service Freezers	**20**	**2008**	25	25		**25**	
Marcus HS - Generator	**-**					**-**	
Marcus HS - Flooring - Classrooms - Carpet	**15**	**2019**	73	73		**73**	Carpet
Marcus HS - Flooring - Classrooms - VCT	**20**	**2019**	80	80		**80**	VCT
Marcus HS - Flooring - Classrooms - VCT	**20**	**2009**	30	30		**30**	**VCT**
Marcus HS - Flooring - Corridors	**20**	**2009**	30	30		**30**	**VCT**
Marcus HS - Flooring - Library	**15**	**2012**	27	20		**23**	**Carpet Squares**
Marcus HS - Flooring - Principal Offices	**15**	**2018**	67	67		**67**	**Carpet**
Marcus HS - Flooring - Office	**20**	**2012**	45	45		**45**	**VCT**
Marcus HS - Flooring - Counselor Office	**15**	**2019**	73	73		**73**	**Carpet**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Marcus HS - Flooring - Cafeteria	50	1984	22	22		22	Terrazzo
Marcus HS - Flooring - Kitchen	50	1984	22	22		22	Terrazzo
Marcus HS - Flooring - Band	20	2012	45	45		45	VCT
Marcus HS - Flooring - Choir	20	2019	80	80		80	VCT
Marcus HS - Flooring - Orchestra	20	2012	45	45		45	VCT
Marcus HS - Plastic Laminate	40	2013	75	75		75	
Marcus HS - Doors	20	2019	80	80		80	
Marcus HS - Door Hardware	20	2019	80	80		80	
Marcus HS - Casework (Built-Ins)	20	1981	-110	0		-55	
Marcus HS - Restrooms - Faculty	20	2020	85	85		85	
Marcus HS - Restrooms - Student	20	2012	45	45		45	
Marcus HS - Restrooms - 1989 Addition	20	2019	80	80		80	Auditorium
Marcus HS - Restrooms - 2000 Addition	20	2000	-15	5		-5	
Marcus HS - Restrooms - 2008 Addition	20	2008	25	25		25	
Marcus HS - Restrooms - 2014 Addition	20	2014	55	55		55	
Marcus HS - Marquee	30	2019	87	80		83	Monument sign only w/lighting
Marcus HS - Paving - Parking Lots	50	2010	74	74		74	
Marcus HS - Paving - Parking Lots	50	2013	80	80		80	
Marcus HS - Paving - Parking Lots	50	2014	82	82		82	Concrete, NE corner lot and front lot. Area includes 2010 lots.
Marcus HS - Paving - Parking Lots	50	2018	90	90		90	
Marcus HS - Paving - Parking Lots	50	2019	92	92		92	
Marcus HS - Paving - Sidewalks	40	1989	15	15		15	
Marcus HS - Paving - Sidewalks	40	2013	75	75		75	
Marcus HS - Exterior Lighting	20	2017	70	70		70	LED
Marcus HS - Exterior Windows - 1981 Original	40	1981	-5	5		0	Vinyl Windows
Marcus HS - Paint - Commons	15	2019	73	73		73	
Marcus HS - Paint - Cafeteria	15	2019	73	73		73	
Marcus HS - Paint - Auditorium	20	2018	75	73		74	
Marcus HS - Paint - M.A.C.	15	2014	40	40		40	
Marcus HS - Paint - Gyms	20	2002	-5	10		3	
Marcus HS - Paint - Exterior	20	2015	60	50		55	Washed and Sealed 2018; Exterior window trim & atrium windows painted 2021
Marcus HS - Paint - Hallways	20	2012	45	45		45	Upper wall only touch ups
Marcus HS - Auditorium Curtains	20	2018	75	75		75	All soft curtains replaced 2018
Marcus HS - Auditorium Stage Lighting	25	2018	80	80		80	
Marcus HS - Auditorium Sound		2014				-	Tracking Replacement Yr only - In Technology Dept. Plans
Marcus HS - Auditorium Seating	20	2018	75	75		75	
Marcus HS - Auditorium Flooring	15	2018	67	67		67	
Marcus HS - M.A.C. - Flooring	40	2014	78	78		78	Wood; Sanding & Refinishing 2022
Marcus HS - M.A.C. - Bleachers	30	2014	70	70		70	Retractable (only 10%)
Marcus HS - M.A.C. - Restrooms	20	2014	55	55		55	
Marcus HS - M.A.C. - Scoreboard	20	2014	55	55		55	Spectrum Wireless - LED
Marcus HS - M.A.C. - Locker Room Flooring	20	2014	55	55		55	Epoxy
Marcus HS - M.A.C. - Locker Room Benches	50	2014	82	82		82	Concrete
Marcus HS - M.A.C. - Locker Room Lockers	40	2014	78	78		78	
Marcus HS - 1981 Gym - Flooring	40	1981	-5	10		3	Small (Silver) gym; needs sanding
Marcus HS - 1981 Gym - Bleachers	30	1981	-40	5		-18	Retractable, small gym
Marcus HS - 1981 Gym - Scoreboard	-					-	
Marcus HS - 1997 Middle Gym - Flooring	40	1997	35	35		35	Red gym; needs sanding
Marcus HS - 1997 Middle Gym - Bleachers	30	1997	13	13		13	
Marcus HS - 1997 Middle Gym - Scoreboard	20	2016	65	65		65	Wired LED
Marcus HS - 2008 Large Gym - Flooring	40	2008	63	63		63	Maurader gym; needs sanding
Marcus HS - 2008 Large Gym - Bleachers	30	2009	53	53		53	
Marcus HS - 2008 Large Gym - Scoreboard	20	2008	25	25		25	Wireless - LED
Marcus HS - Locker Rooms - Flooring	20	2008	25	25		25	Epoxy
Marcus HS - Locker Rooms - Benches	50	2008	70	70		70	Concrete
Marcus HS - Locker Rooms - Partitions	20	2008	25	25		25	Solid plastic
STADIUM 2010							
Marcus HS - Stadium Bleachers	40	2010	68	68		68	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Marcus HS - Stadium Artificial Turf	8	2018	38	38		38	
Marcus HS - Stadium Synthetic Track	10	2018	50	50		50	
Marcus HS - Stadium PA System		2012				-	Tracking Replacement Yr only - In Technology Dept. Plans
Marcus HS - Stadium Light poles	30	2010	57	57		57	
Marcus HS - Stadium Scoreboard	18	2010	28	28		28	Wired LED; Fairplay; wireless play clocks
Marcus HS - Stadium Pressbox HVAC	20	2010	35	35		35	
Marcus HS - Stadium Pressbox Roof	20	2010	35	35		35	Mod Bit
Marcus HS - Stadium Pressbox Flooring	15	2010	13	13		13	Carpet; interior painted 2018
Marcus HS - Stadium Ticket Booth(s)	20	2010	35	35		35	
Marcus HS - Stadium Concession - Home - HVAC	-					-	
Marcus HS - Stadium Concession - Home - Roof	20	2010	35	45		40	Under Bleachers
Marcus HS - Stadium Concession - Home - Flooring	20	2010	35	35		35	VCT
Marcus HS - Stadium Concession - Visitor - HVAC	-					-	
Marcus HS - Stadium Concession - Visitor - Roof	20	2010	35	45		40	Under Bleachers
Marcus HS - Stadium Concession - Home - Flooring	20	2010	35	35		35	VCT
Marcus HS - Stadium Restrooms - Home	20	2010	35	35		35	Concrete
Marcus HS - Stadium Restrooms - Visitor	20	2010	35	35		35	Concrete
Marcus HS - Stadium Band Tower	50	2023	100	100		100	
Marcus HS - Lightning Detection		2023					Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
Marcus HS - Field House HVAC	20	2010	35	35		35	
Marcus HS - Field House Roof - Metal	30	2010	57	57		57	
Marcus HS - Field House Electrical Panels	30	2010	57	57		57	
Marcus HS - Field House Fire Safety - Alarm System	20	2010	35	35		35	Edwards IQ - has own account; tied to stadium
Marcus HS - Field House Fire Safety - Sprinkler System	50	2010	74	74		74	
Marcus HS - Field House Flooring - Carpet	15	2010	13	13		13	Office
Marcus HS - Field House Flooring - Epoxy	20	2010	35	35		35	
Marcus HS - Field House Flooring - Concrete/Terrazzo	50	2010	74	74		74	
Marcus HS - Field House Restrooms	20	2010	35	30		33	Concrete
Marcus HS - Field House Restrooms - Coaches	20	2010	35	35		35	
Marcus HS - Field House Lockers	40	2010	68	60		64	
Marcus HS - Field House Benches	50	2010	74	74		74	Concrete
Marcus HS - Field House Paint	20	2017	70	70		70	
Marcus HS - Field House Exterior Lighting	20	2010	35	35		35	
INDOOR ATHLETIC CENTER 2013							
Marcus HS - IAC HVAC	20	2013	50	40		45	
Marcus HS - IAC Roof - Metal	30	2013	67	67		67	
Marcus HS - IAC Electrical Panels	30	2013	67	67		67	
Marcus HS - IAC Fire Safety - Alarm System	20	2013	50	50		50	Edwards IQ - has own account; stand alone
Marcus HS - IAC Fire Safety - Sprinkler System	50	2013	80	80		80	
Marcus HS - IAC Turf	15	2013	33	25		29	Showing some wear
Marcus HS - IAC Paint	20	2019	80	80		80	
Marcus HS - IAC Paint - Exterior	20	2013	50	50		50	
Marcus HS - IAC Weight room flooring	20	2023	100	100		100	Athletics replaced flooring Summer 2023
ROBOTICS 1982							
Marcus HS - Robotics HVAC	20	2007	20	20		20	
Marcus HS - Robotics HVAC - Shop	20	2022	95	95		95	30 ton AAON RTU
Marcus HS - Robotics Roof	20	2020	85	85		85	4 PLY; Original building areas;
Marcus HS - Robotics Flooring - Classrooms	20	2015	60	60		60	VCT; interior painted 2017
Marcus HS - Robotics Flooring - Shop	20	2022	95	95		95	Rubber
SPORTS COMPLEX 2009							**DIXON ROAD**
Marcus HS - Sports Complex Parking Lots	50	2012	78	78		78	
Marcus HS - Sports Complex Exterior Lights	20	2012	45	40		43	Needs LED upgrade
BASEBALL FIELD 2009							
Marcus HS - Baseball Field Bleachers	40	2009	65	65		65	
Marcus HS - Baseball Field Backstop Netting	15	2009	7	10		8	Minor repairs in 2019, 2021 & 2022; showing major wear on top & bottom of net.
Marcus HS - Baseball Field Scoreboard	20	2009	30	30		30	Wireless - LED; Spectrum

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Marcus HS - Baseball Field Pressbox	20	2007	20	20		20	Brought from main campus
Marcus HS - Baseball Field Dugout Paint	15	2009	7	7		7	
Marcus HS - Baseball Field Light poles	30	2009	53	53		53	needs relamped
Marcus HS - Baseball Field Field Leveling	4	2021	50	50		50	Field gets a lot of use out of season.
Marcus HS - Baseball Field Batting Cage	20	2009	30	30		30	New nets covered cage; Athletics is replacing turf 2023
Locker Rooms / Restrooms / Concession							
Marcus HS - Baseball Field Locker/Restroom/Concession HVAC	20	2009	30	30		30	Controls = Alerton
Marcus HS - Baseball Field Locker/Restroom/Concession Roof - Metal	30	2009	53	53		53	
Marcus HS - Baseball Field Locker/Restroom/Concession Flooring	20	2009	30	5		18	Epoxy & Concrete
Marcus HS - Baseball Field Locker Rm & Lockers	20	2009	30	30		30	Needs Expansion
SOFTBALL FIELD 2012							
Marcus HS - Softball Field Bleachers	40	2012	73	73		73	
Marcus HS - Softball Field Backstop Netting	15	2012	27	27		27	Minor repairs in 2020
Marcus HS - Softball Field Scoreboard	20	2012	45	45		45	LED wireless; Spectrum
Marcus HS - Softball Field Pressbox	20	2012	45	45		45	
Marcus HS - Softball Field Dugout Paint	15	2012	27	20		23	Boosters have maintained
Marcus HS - Softball Field Light poles	30	2012	63	63		63	
Marcus HS - Softball Field Leveling	4	2021	50	50		50	
Marcus HS - Softball Field Batting Cage	20	2012	45	45		45	Replaced nets 2021
Marcus HS - Softball Field Concession	20	2012	45	45		45	
Locker Rooms / Restrooms / Concession							
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession HVAC	20	2012	45	45		45	
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession Roof - Metal	30	2012	63	63		63	
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession Flooring	20	2012	45	45		45	Epoxy
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession Flooring	20	2012	45	45		45	VCT
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession Lockers	20	2012	45	45		45	
TENNIS COURTS 2014							
Marcus HS - Tennis Courts	50	2012	78	78		78	12 courts; some concrete cracking and chipping on side walls
Marcus HS - Tennis Courts Resurfaced	10	2012	-10	0		-5	Showing wear
Marcus HS - Tennis Courts Light Poles	30	2012	63	63		63	12 Light poles - Musco
Marcus HS - Tennis Courts Shade Structure	20	2012	45	45		45	

The Colony HS

Year Built / Age 1986 / 37

Campus Square Footage 482,651

Current Year 2023

Assessment Scale:
100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1986**	**26**				
MAIN CAMPUS							
The Colony HS - HVAC - Original	**20**	**2005**	10	10	-8%	**9**	**MIX; 2019 2 New Boilers installed**
The Colony HS - HVAC - 1987 Addition	**20**	**2005**	10	10	-8%	**9**	**H Hall; Big Gym; Ag; Old Football Locker Rm**
The Colony HS - HVAC - 1989 Addition	**20**	**2005**	10	10	-8%	**9**	**J Hall; Auditorium**
The Colony HS - HVAC - 2002 Addition	**20**	**2002**	-5	10	-8%	**3**	**K-wing, 2002 Percussion**
The Colony HS - HVAC - 2003 Addition	**20**	**2003**	0	10	-8%	**5**	**Varsity Gym and locker rooms**
The Colony HS - HVAC - 2008 Addition	**20**	**2009**	30	20	-8%	**23**	**2009 Band partial**
The Colony HS - HVAC - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box Addition**
The Colony HS - HVAC - 2024 Addition							**Activities Center - In Progress**
The Colony HS - HVAC - Controls	**20**	**2005**	10	10		**10**	**Controls = Alerton**
The Colony HS - Ceiling and Lights - Original	**20**	**2005**	10	10		**10**	**MIX**
The Colony HS - Ceiling and Lights - 1987 Addition	**20**	**2005**	10	10		**10**	
The Colony HS - Ceiling and Lights - 1989 Addition	**20**	**2005**	10	10		**10**	
The Colony HS - Ceiling and Lights - 2002 Addition	**20**	**2002**	-5	5		**0**	**K-wing, 2002 Band**
The Colony HS - Ceiling and Lights - 2003 Addition	**20**	**2003**	0	5		**3**	**Varsity Gym and locker rooms**
The Colony HS - Ceiling and Lights - 2008 Addition	**20**	**2009**	30	30		**30**	**2009 Band**
The Colony HS - Ceiling and Lights - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box Addition**
The Colony HS - Ceiling and Lights - 2024 Addition							**Activities Center - In Progress**
The Colony HS - Roof - Flat - Original	**20**	**2010**	35	35	-50%	**18**	**Small Gym replaced 2015**
The Colony HS - Roof - Flat - 1987 Addition	**20**	**2001**	-10	0	-50%	**-8**	**Big Gym replaced 2015**
The Colony HS - Roof - Flat - 1989 Addition	**20**	**2001**	-10	0	-50%	**-8**	**Auditorium replaced 2015**
The Colony HS - Roof - Flat - 2002 Addition	**20**	**2002**	-5	0	-50%	**-4**	**K Wing & Percussion**
The Colony HS - Roof - Flat - 2003 Addition	**20**	**2003**	0	0	-50%	**0**	**Competition Gym**
The Colony HS - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	-50%	**13**	**Band**
The Colony HS - Roof - Flat - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box Addition**
The Colony HS - Roof - Flat - 2024 Addition							**Activities Center - In Progress**
The Colony HS - Electrical Switchgear - Original	**30**	**2009**	53	53	8%	**57**	**Main Switch Gear 2009; Original Panels**
The Colony HS - Electrical Panels - 1987 Addition	**30**	**2009**	53	53	8%	**57**	**Main Switch Gear 2009; Original Panels**
The Colony HS - Electrical Panels - 1989 Addition	**30**	**2009**	53	53	8%	**57**	**Main Switch Gear 2009; Original Panels**
The Colony HS - Electrical Panels - 2002 Addition	**30**	**2002**	30	30	8%	**32**	
The Colony HS - Electrical Panels - 2003 Addition	**30**	**2003**	33	33	8%	**36**	
The Colony HS - Electrical Panels - 2008 Addition	**30**	**2008**	50	50	8%	**54**	
The Colony HS - Electrical Panels - 2022 Addition	**30**	**2022**	97	97		**97**	**Black Box Addition**
The Colony HS - Electrical Panels - 2024 Addition							**Activities Center - In Progress**
The Colony HS - Elevator #1 (Main)	**25**	**2020**	88	88	18%	**100**	**Refurbished; Elevator Controls**
The Colony HS - Elevator #2 (Stadium)	**25**	**1995**				**0**	**IN PROGRESS**
The Colony HS - Lift (Baseball Press Box)	**-**					**-**	**Removed 7/2019**
The Colony HS - Fire Safety - Fire Alarm	**20**	**2000**	-15	5	4%	**-5**	**Edwards EST 3**
The Colony HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
The Colony HS - Fire Safety - Sprinkler System	**50**	**2005**	64	64	10%	**71**	
The Colony HS - Fire Safety - Sprinkler System - 2022 Add	**50**	**2022**	98	98		**98**	
The Colony HS - Storm Shelter - 2022 Add	**50**	**2022**	98	98		**98**	**Black Box Addition**
The Colony HS - Food Service Boilers	**20**	**2018**	75	75		**75**	
The Colony HS - Food Service Freezers	**20**	**2008**	25	25		**25**	
The Colony HS - Food Service Freezers - Cougar Cafe	**20**	**2009**	30	30		**30**	
The Colony HS - Generator	**40**	**2007**	60	60		**60**	**Generac - Natural Gas; 100 KW**
The Colony HS - Lift Station							**Activities Center - In Progress**
The Colony HS - Flooring - Classrooms - VCT	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Classrooms - VCT	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Classrooms - VCT	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Classrooms - VCT	**20**	**2009**	30	30		**30**	**VCT**
The Colony HS - Flooring - Corridors	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet; Lees**
The Colony HS - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
The Colony HS - Flooring - Cafeteria / Commons	**20**	**2013**	50	50		**50**	**LVT**
The Colony HS - Flooring - Kitchen	**50**	**1986**	26	26		**26**	**CT**
The Colony HS - Flooring - Band	**20**	**2009**	30	30		**30**	**VCT**
The Colony HS - Flooring - Choir	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Orchestra	**20**	**2003**	0	0		**0**	**VCT**
The Colony HS - Flooring - 2022 Black Box Addition	**20**	**2022**	95	95		**95**	**VCT**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
The Colony HS - Plastic Laminate	40	2013	75	75		75	
The Colony HS - Doors	20	2021	90	90		90	
The Colony HS - Door Hardware	20	2021	90	90		90	
The Colony HS - Casework (Built-Ins)	20	2021	90	90		90	
The Colony HS - Restrooms - Faculty	20	2013	50	50		50	
The Colony HS - Restrooms - Student	20	2013	50	60		55	CMU partitions
The Colony HS - Restrooms - 1987 Addition	20	2013	50	50		50	Old Football Locker room
The Colony HS - Restrooms - 2002 Addition	20	2002	-5	5		0	K Wing
The Colony HS - Restrooms - 2003 Addition	20	2003	0	5		3	Varsity Gym Locker Rooms
The Colony HS - Restrooms - Auditorium	20	2018	75	75		75	
The Colony HS - Marquee	15	2016	53	53		53	2016 Replaced LED; Digital
The Colony HS - Paving - Parking Lots	50	1986	26	26		26	Concrete
The Colony HS - Paving - Parking Lots	20	2012	45	35		40	Asphalt
The Colony HS - Paving - Parking Lots	50	2013	80	80		80	Concrete
The Colony HS - Paving - Sidewalks	40	1986	8	20		14	Concrete
The Colony HS - Exterior Lighting	20	2019	80	80		80	LED
The Colony HS - Exterior Windows - 1986 Original	40	1986	8	8		8	Vinyl
The Colony HS - Paint - Commons	15	2013	33	33		33	PLAM to 7 ft; maintained paint 2019
The Colony HS - Paint - Cafeteria	15	2021	87	87		87	
The Colony HS - Paint - Auditorium	15	2018	67	67		67	
The Colony HS - Paint - Gyms	15	2005	-20	10		-5	Small and medium gym
The Colony HS - Paint - Gyms	20	2010	35	35		35	Varsity gym
The Colony HS - Paint - Exterior	20	2010	35	35		35	New doors & Rails 2017
The Colony HS - Paint - Hallways	20	2014	55	55		55	
The Colony HS - Auditorium Curtains	20	2018	75	75		75	2008 Bond
The Colony HS - Auditorium Stage Lighting	25	2018	80	80		80	2008 Bond
The Colony HS - Auditorium Sound		2015				-	Tracking Replacement Yr only - In Technology Dept. Plans
The Colony HS - Auditorium Seating	20	2018	75	75		75	2008 Bond
The Colony HS - Auditorium Flooring	15	2018	67	67		67	2008 Bond
The Colony HS - 1986 North Gym - Flooring	40	1986	8	8		8	Wood
The Colony HS - 1987 Middle Gym - Flooring	40	1987	10	10		10	Wood
The Colony HS - 1987 Middle Gym - Bleachers	30	1987	-20	0		-10	
The Colony HS - 2003 Varsity Gym - Flooring	40	2003	50	50		50	Varsity; Sanded and Painted 2016 (2nd sanding)
The Colony HS - 2003 Varsity Gym - Bleachers	30	2003	33	33		33	
The Colony HS - Locker Rooms - Flooring	20	2012	45	45		45	Epoxy
The Colony HS - Locker Rooms - Benches	20	2013	50	50		50	Linex
The Colony HS - Locker Rooms - Partitions	20	2012	45	45		45	Solid plastic
STADIUM 1986							
The Colony HS - Stadium Bleachers	40	1986	8	20		14	
The Colony HS - Stadium Artificial Turf	8	2021	75	75		75	
The Colony HS - Stadium Synthetic Track	10	2012	-10	15		3	Repainted 2018; fading coating but looks good overall
The Colony HS - Stadium PA System		2013				-	Tracking Replacement Yr only - In Technology Dept. Plans
The Colony HS - Stadium Light poles	30	2010	57	57		57	
The Colony HS - Stadium Scoreboard	18	2003	-11	5		-3	
The Colony HS - Stadium Pressbox HVAC	20	2023				0	IN PROGRESS
The Colony HS - Stadium Pressbox Roof	20	2023				0	IN PROGRESS
The Colony HS - Stadium Pressbox Flooring	15	2023				0	IN PROGRESS
The Colony HS - Stadium Ticket Booth(s)	20	2023				0	IN PROGRESS
The Colony HS - Stadium Concession - Home - HVAC	20	2024				0	IN PROGRESS
The Colony HS - Stadium Concession - Home - Roof	20	2024				0	IN PROGRESS
The Colony HS - Stadium Concession - Home - Flooring	20	2024				0	IN PROGRESS
The Colony HS - Stadium Concession / Locker Room - Visitor - HVAC	20	2019	80	80		80	
The Colony HS - Stadium Concession / Locker Room - Visitor - Roof	20	2019	80	80		80	
The Colony HS - Stadium Restrooms - Home	20	2004	5	5		5	Painted 2017
The Colony HS - Stadium Restrooms - Visitor	20	2004	5	5		5	Painted 2017
The Colony HS - Stadium Restrooms - North End	20	2018				0	IN PROGRESS
The Colony HS - Stadium Band Tower	50	2023	100	100		100	
The Colony HS - Lightning Detection		2023					Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
The Colony HS - Field House HVAC	20	2010	35	35		35	
The Colony HS - Field House Roof - Metal	30	2010	57	57		57	
The Colony HS - Field House Electrical Panels	30	2010	57	57		57	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
The Colony HS - Field House Fire Safety - Alarm System	20	2010	35	35		35	Tied into Main Bldg, Warning detection devices only
The Colony HS - Field House Fire Safety - Sprinkler System	50	2010	74	74		74	
The Colony HS - Field House Flooring - Carpet	15	2010	13	13		13	
The Colony HS - Field House Flooring - Epoxy	20	2010	35	35		35	
The Colony HS - Field House Flooring - Concrete/Terrazzo	50	2010	74	74		74	
The Colony HS - Field House Restrooms	20	2010	35	35		35	
The Colony HS - Field House Restrooms - Coaches	20	2010	35	35		35	
The Colony HS - Field House Lockers	40	2010	68	68		68	
The Colony HS - Field House Benches	50	2010	74	74		74	Concrete
The Colony HS - Field House Paint	15	2017	60	60		60	
The Colony HS - Field House Exterior Lighting	20	2010	35	35		35	
INDOOR ATHLETIC CENTER 1995							
The Colony HS - IAC HVAC	20	2018	75	75		75	Heat only
The Colony HS - IAC Roof - Metal	30	1995	7	10		8	
The Colony HS - IAC Electrical Panels	30	1995	7	7		7	
The Colony HS - IAC Fire Safety - Alarm System	-					-	
The Colony HS - IAC Fire Safety - Sprinkler System	-					-	
The Colony HS - IAC Artificial Turf	15	2010	13	13		13	
The Colony HS - IAC Flooring - Girls Soccer	20	2018	75	75		75	
The Colony HS - IAC Lockers - Girls Soccer	40	2018	88	88		88	
The Colony HS - IAC Paint	20	2017	70	70		70	
The Colony HS - IAC Paint - Exterior	20	1995	-40	10		-15	
WEIGHT ROOM 2003							
The Colony HS - Weight Room HVAC	20	2018	75	75		75	
The Colony HS - Weight Room Roof - Metal	30	2003	33	33		33	
The Colony HS - Weight Room Electrical Panels	30	2003	33	33		33	
The Colony HS - Weight Room Fire Safety - Alarm System	-					-	
The Colony HS - Weight Room Fire Safety - Sprinkler System	-					-	
The Colony HS - Weight Room Flooring - Rubber	20	2023	100	100		100	Athletics replaced flooring Summer 2023
The Colony HS - Weight Room Paint	20	2018	75	75		75	
TC.A.C. 2024							
Hebron HS - H.A.C. - Fire Safety - Alarm System	20						IN PROGRESS
Hebron HS - H.A.C. - HVAC	20						IN PROGRESS
Hebron HS - H.A.C. - Roof - Flat	20						IN PROGRESS
Hebron HS - H.A.C. - Electrical Panels	30						IN PROGRESS
Hebron HS - H.A.C. - Fire Safety - Sprinkler System	50						IN PROGRESS
Hebron HS - H.A.C. - Gym Flooring	40						IN PROGRESS
Hebron HS - H.A.C. - Bleachers	30						IN PROGRESS
Hebron HS - H.A.C. - Restrooms	20						IN PROGRESS
Hebron HS - H.A.C. - Scoreboard	20						IN PROGRESS
Hebron HS - H.A.C. - Locker Room Flooring	20						IN PROGRESS
Hebron HS - H.A.C. - Locker Room Benches	50						IN PROGRESS
Hebron HS - H.A.C. - Locker Room Lockers	40						IN PROGRESS
BASEBALL FIELD 1987							
The Colony HS - Baseball Field Bleachers	40	1991	20	20		20	
The Colony HS - Baseball Field Restrooms	-					-	See Stadium Concession/Locker Room Visitor 1988
The Colony HS - Baseball Field Backstop Netting	15	2010	13	13		13	Considerable repairs in 2017; Minor repairs in 2019 & 2022
The Colony HS - Baseball Field Scoreboard	20	2015	60	60		60	Spectrum
The Colony HS - Baseball Field Pressbox	20	1997	-30	5		-13	IN PROGRESS
The Colony HS - Baseball Field Dugout Paint	20	2015	60	60		60	
The Colony HS - Baseball Field Light poles	30	1991	-7	5		-1	
The Colony HS - Baseball Field Field Leveling	4	2022	75	75		75	
The Colony HS - Baseball Field Batting Cages	20	2012	45	45		45	Athletics is replacing turf 2023
The Colony HS - Baseball Field Locker Room	-					-	See Stadium Concession/Locker Room Visitor 1988
The Colony HS - Baseball Concession Stand	20	1997	-30	10		-10	
SOFTBALL FIELD 2019							
The Colony HS - Softball Field Bleachers	40	2019	90	90		90	
The Colony HS - Softball Field Restrooms	20	2019	80	80		80	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
The Colony HS - Softball Field Backstop Netting	15	2019	73	73		73	Repairs made in 2021 & 2022
The Colony HS - Softball Field Scoreboard	20	2015	60	60		60	
The Colony HS - Softball Field Pressbox	20	2019	80	80		80	
The Colony HS - Softball Field Dugout Paint	20	2019	80	80		80	
The Colony HS - Softball Field Light poles	30	2019	87	87		87	
The Colony HS - Softball Artificial Turf	8	2019	50	50		50	Good Shape
The Colony HS - Softball Field Batting Cages	20	2019	80	80		80	
The Colony HS - Softball Field Locker Room	20	2019	80	80		80	
TENNIS COURTS 1986							
The Colony HS - Tennis Courts - West	50	1986	26	26		26	4 Courts
The Colony HS - Tennis Courts - West Resurfaced	10	2013	0	0		0	Showing some wear; fencing in bad shape
The Colony HS - Tennis Courts - West Light Poles	30	2010	57	50		53	9 poles for 4 courts; some dark spots
The Colony HS - Tennis Courts - East	50	1994	42	42		42	4 Courts - minor repairs to courts 2022
The Colony HS - Tennis Courts - East Resurfaced	10	2013	0	0		0	Showing wear.
The Colony HS - Tennis Courts - Shade Structure	20	2013	50	50		50	

ASSESSMENT SUMMARY
EXTRA-CURRICULAR

Current Year 2023

	AG BARN	AQUATIC CENTER EAST	AQUATIC CENTER WEST	LEWISVILLE LEARNING CENTER	LISDOLA	Student Success Center @ College St.	TECC - EAST	TECC - WEST
Year Built	2010	2006	2014	2001	2021	1960	2010	2020
Age	13	17	9	22	2	63	13	3
Foundation	-	-	-	-	-	0	-	-
HVAC - Original	41	8	26	-2	86	93	38	100
HVAC - Addition	55	-	-	34		93	-	-
HVAC - Controls	-	15	55	-3	90	90	35	85
Roof - Flat	-	15	-	-4	100	24	-	-
Roof - Flat Addition	-	-	-	17	-	-	-	-
Roof - Shingled	-	-	-	-	-	-	-	-
Roof - Metal	68	-	64	-	-	-	-	-
Roof - Standing Seam	-	-	-	-	-	93	67	100
Electrical Panels - Original	43	43	65	22	100	93	58	100
Electrical Panels - Addition	70	-	-	43	-	-	-	-
Elevator #1	-	-	26	27	-	-	56	100
Elevator #2	-	-	-	20	-	-	-	-
Fire Safety - Fire Alarm	28	17	25	-2	90	90	36	100
Fire Safety - Sprinkler System	-	33	41	61	96	96	83	100
Food Service Boilers	-	-	-	-	-	90	-	-
Food Service Freezers	-	-	-	-	-	90	-	-
Generator	-	-	78	-	-	-	68	93
Flooring - Classrooms	-	15	82	-3	-	90	74	94
Flooring - Classrooms - Additions	-	-	-	30	-	-	-	94
Flooring - Corridors	-	66	82	-3	-	90	74	80
Flooring - Library	-	-	-	-	-	-	-	-
Flooring - Office	-	15	55	-21	-	87	13	-
Flooring - Cafeteria	-	-	-	-3	-	90	-	-
Flooring - Kitchen	-	-	-	56	-	90	-	-
Flooring - Gym	-	-	-	-	-	68	-	-
Flooring - Band	-	-	-	-	-	-	-	-
Flooring - Choir	-	-	-	-	-	-	-	-
Flooring - Weight Room	-	15	-	-	-	-	-	-
Flooring - Concrete	72	-	-	-	96	-	-	-
Plastic Laminate	-	-	-	45	95	95	68	93
Doors	35	15	55	-3	90	90	35	85
Door Hardware	35	13	100	-3	90	90	35	85
Casework (Built Ins)	-	15	55	-3	90	90	35	85
Restrooms - Faculty	-	-	-	-	-	90	-	85
Restrooms - Student	-	-	-	-	-	90	-	85
Restrooms - Men's	35	13	55	-3	90	-	35	-
Restrooms - Women's	35	13	55	-3	90	-	35	-
Marquee	-	-	-	60	-	-	93	80
Paving - Parking Lots	74	66	82	56	96	90	74	94
Paving - Sidewalks	68	58	78	45	95	95	68	93
Exterior Lighting	35	15	55	90	90	90	90	85
Paint - Commons	13	47	67	73	87	87	33	80
Paint - Gym	-	-	-	65	-	90	-	-
Paint - Exterior	35	15	55	65	90	90	35	85

	AG BARN	AQUATIC CENTER EAST	AQUATIC CENTER WEST	LEWISVILLE LEARNING CENTER	LISDOLA	Student Success Center @ College St.	TECC - EAST	TECC - WEST
Paint - Hallways	-	-	-	65	-	90	35	85
Dust Collector	-	-	-	-	-	-	-	85
Sports and Fine Arts	-	-	-	-	-	-	-	-
Perf Arts - Curtains	-	-	-	-	-	-	-	-
Perf Arts - PA System	-	-	-	-	-	-	-	-
Perf Arts - Cafetorium Lighting	-	-	-	-	-	-	-	-
Track	-	-	-	-	-	-	-	-
Field Lights	-	-	-	-	-	-	-	-
Bleachers - Exterior	-	-	-	-	-	-	-	-
Bleachers - Interior	-	66	82	-	-	-	-	-
Gym Main - Flooring	-	-	-	-	-	-	-	-
Gym Auxiliary - Flooring	-	-	-	-	-	-	-	-
Boys Locker Rooms - Flooring	-	15	55	-	-	-	-	-
Girls Locker Rooms - Flooring	-	15	55	-	-	-	-	-
Boys Locker Rooms - Lockers	-	15	55	-	-	-	-	-
Girls Locker Rooms - Lockers	-	15	55	-	-	-	-	-
Boys Locker Rooms - Benches	-	66	82	-	-	-	-	-
Girls Locker Rooms - Benches	-	66	82	-	-	-	-	-
Gym - Partitions	-	-	-	-	-	-	-	-
Pool Plaster	-	23	40	-	-	-	-	-
Scoreboard	-	-7	38	-	-	-	-	-

Agriculture Barn

Year Built / Age 2010 / 13

Campus Square Footage 19,081

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes
FACILITY AGE RATING	**50**	**2010**	**74**				
Agriculture Barn - HVAC - Original	**20**	**2010**	35	35	18%	**41**	**split system; Contols = n/a**
Agriculture Barn - HVAC - 2014 Addition	**20**	**2014**	55	55		**55**	**Pig Barn: heaters and 1 split system**
Agriculture Barn - Ceiling and Lights - Original	**20**	**2021**	90	90		**90**	**Pig barn LED lights 2022; Cattle Barn LED lights 2021**
Agriculture Barn - Roof - Metal	**30**	**2010**	57	57	20%	**68**	
Agriculture Barn - Roof - Metal - 2020 Addition	**30**	**2020**	90	90	20%	**90**	
Agriculture Barn - Electrical Switchgear - Original	**30**	**2010**	57	57	-24%	**43**	
Agriculture Barn - Electrical Panels - 2014 Addition	**30**	**2014**	70	70		**70**	**Pig Barn**
Agriculture Barn - Electrical Panels - 2020 Addition	**30**	**2020**	90	90		**90**	
Agriculture Barn - Fire Safety - Fire Alarm	**20**	**2010**	35	35	-20%	**28**	**Edwards EST IO64**
Agriculture Barn - Fire Safety - ERRS	**-**					**-**	
Agriculture Barn - Fire Safety - Sprinkler System	**-**					**-**	**N/A**
Agriculture Barn - Generator	**-**					**-**	
Agriculture Barn - Flooring - Concrete	**50**	**2010**	74	70		**72**	**Concrete**
Agriculture Barn - Doors	**20**	**2010**	35	35		**35**	
Agriculture Barn - Door Hardware	**20**	**2010**	35	35		**35**	
Agriculture Barn - Restrooms - Men	**20**	**2010**	35	35		**35**	**Concrete**
Agriculture Barn - Restrooms - Women	**20**	**2010**	35	35		**35**	**Concrete**
Agriculture Barn - Marquee	**-**					**-**	
Agriculture Barn - Paving - Parking Lots	**50**	**2010**	74	74		**74**	**Concrete**
Agriculture Barn - Paving - Sidewalks	**40**	**2010**	68	68		**68**	
Agriculture Barn - Exterior Lighting	**20**	**2010**	35	35		**35**	
Agriculture Barn - Paint - Commons areas	**15**	**2010**	13	13		**13**	
Agriculture Barn - Paint - Exterior	**20**	**2010**	35	35		**35**	

Aquatic Center East

Year Built / Age 2006 / 17

Campus Square Footage 38,871

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2006**	**66**				
Aquatic Cntr East - HVAC	**20**	**2006**	15	15	-50%	**8**	**DECTRON UNITS; boiler replaced 2021**
Aquatic Cntr East - HVAC - Controls	**20**	**2006**	15	15		**15**	**Controls = Alerton**
Aquatic Cntr East - Ceiling and Lights	**20**	**2006**	15	15		**15**	
Aquatic Cntr East -LED Lights over Pool	**20**	**2019**	80	70		**75**	
Aquatic Cntr East - Roof - Flat	**20**	**2006**	15	15	-2%	**15**	**Modified Bitumen**
Aquatic Cntr East - Electrical Switchgear	**30**	**2006**	43	43	0%	**43**	
Aquatic Cntr East - Fire Safety - Fire Alarm	**20**	**2006**	15	15	16%	**17**	**Edwards EST 3**
Aquatic Cntr East - Fire Safety - ERRS	**-**					**-**	
Aquatic Cntr East - Fire Safety - Sprinkler System	**50**	**2006**	66	66	-50%	**33**	
Aquatic Cntr East - Generator	**-**					**-**	
Aquatic Cntr East - Flooring - Classrooms	**20**	**2006**	15	15		**15**	**VCT**
Aquatic Cntr East - Flooring - Corridors	**50**	**2006**	66	66		**66**	**Concrete**
Aquatic Cntr East - Flooring - Office	**20**	**2006**	15	15		**15**	**VCT**
Aquatic Cntr East - Flooring - Weight Room	**20**	**2006**	15	15		**15**	**Rubber**
Aquatic Cntr East - Doors	**20**	**2006**	15	15		**15**	
Aquatic Cntr East - Door Hardware	**20**	**2006**	15	10		**13**	
Aquatic Cntr East - Casework (Built-Ins)	**20**	**2006**	15	15		**15**	
Aquatic Cntr East - Restrooms - Men's	**20**	**2006**	15	10		**13**	**CT**
Aquatic Cntr East - Restrooms - Women's	**20**	**2006**	15	10		**13**	**CT**
Aquatic Cntr East - Marquee	**-**					**-**	
Aquatic Cntr East - Paving - Parking Lots	**50**	**2006**	66	66		**66**	
Aquatic Cntr East - Paving - 2022 Parking Lot	**50**	**2022**	98	98		**98**	**105 spaces**
Aquatic Cntr East - Paving - Sidewalks	**40**	**2006**	58	58		**58**	
Aquatic Cntr East - Exterior Lighting	**20**	**2006**	15	15		**15**	**46 light poles LED; wall packs LED 2021**
Aquatic Cntr East - Exterior Lighting - 2022 Parking Lot	**20**	**2022**	95	95		**95**	**7 LED**
Aquatic Cntr East - Paint - Commons	**15**	**2015**	47	47		**47**	**Lower areas painted in 2019**
Aquatic Cntr East - Paint - Exterior	**20**	**2006**	15	15		**15**	**Maintaining**
Aquatic Cntr East - Bleachers - Interior	**50**	**2006**	66	66		**66**	**Concrete / Aluminum**
Aquatic Cntr East - Boys Locker Rooms - Flooring	**20**	**2006**	15	15		**15**	**Ceramic tile 12x12**
Aquatic Cntr East - Girls Locker Rooms - Flooring	**20**	**2006**	15	15		**15**	**Ceramic tile 12x12**
Aquatic Cntr East - Boys Locker Rooms - Lockers	**20**	**2006**	15	15		**15**	**Phenolic**
Aquatic Cntr East - Girls Locker Rooms - Lockers	**20**	**2006**	15	15		**15**	**Phenolic**
Aquatic Cntr East - Boys Locker Rooms - Benches	**50**	**2006**	66	66		**66**	**Concrete**
Aquatic Cntr East - Girls Locker Rooms - Benches	**50**	**2006**	66	66		**66**	**Concrete**
Aquatic Cntr East - Pool Plaster	**10**	**2016**	30	15		**23**	**Replaced 2016; Rust**
Aquatic Cntr East - Scoreboard	**15**	**2006**	-13	0		**-7**	

Aquatic Center West

Year Built / Age 2014 / 9

Campus Square Footage 59,000

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2014**	**82**				
Aquatic Cntr West - HVAC	**20**	**2014**	55	50	-50%	**26**	**DECTRON UNITS; CO2 tank replaced 2022**
Aquatic Cntr West - HVAC	**20**	**2023**	100	100		**100**	**MAU for Events**
Aquatic Cntr West - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Aquatic Cntr West - Ceiling and Lights	**20**	**2014**	55	55		**55**	
Aquatic Cntr West -LED Lights over Pool	**20**	**2016**	65	55		**60**	
Aquatic Cntr West - Roof - Metal	**30**	**2014**	70	70	-9%	**64**	
Aquatic Cntr West - Electrical Switchgear	**30**	**2014**	70	60	0%	**65**	
Aquatic Cntr West - Elevator	**25**	**2014**	64	40	-50%	**26**	**Thyssen Krupp- Cab Reno 2023**
Aquatic Cntr West - Fire Safety - Fire Alarm	**10**	**2019**	60	40	-50%	**25**	**Honeywell Farenhyt IFP-300**
Aquatic Cntr West - Fire Safety - ERRS	**-**					**-**	
Aquatic Cntr West - Fire Safety - Sprinkler System	**50**	**2014**	82	82	-50%	**41**	
Aquatic Cntr West - Evacuator	**20**	**2023**	100	100		**100**	
Aquatic Cntr West - Generator	**40**	**2014**	78	78		**78**	**Cummins - Diesel; 100 KW**
Aquatic Cntr West - Flooring - Corridors	**50**	**2014**	82	82		**82**	**Concrete**
Aquatic Cntr West - Flooring - Offices	**50**	**2014**	82	82		**82**	**Concrete**
Aquatic Cntr West - Flooring - Weight Room	**20**	**2014**	55	55		**55**	**Rubber**
Aquatic Cntr West - Doors	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Door Hardware	**20**	**2023**	100	100		**100**	
Aquatic Cntr West - Casework (Built-Ins)	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Restrooms - Men's	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Restrooms - Women's	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Marquee	**-**					**-**	**shared with TECC W**
Aquatic Cntr West - Paving - Parking Lots	**50**	**2014**	82	82		**82**	
Aquatic Cntr West - Paving - Sidewalks	**40**	**2014**	78	78		**78**	
Aquatic Cntr West - Exterior Lighting	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Paint - Commons	**15**	**2018**	67	67		**67**	**Lower areas in 2019 & 2023**
Aquatic Cntr West - Paint - Exterior	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Bleachers - Interior	**50**	**2014**	82	82		**82**	**Concrete / Aluminum**
Aquatic Cntr West - Boys Locker Rooms - Flooring	**20**	**2014**	55	55		**55**	**Epoxy**
Aquatic Cntr West - Girls Locker Rooms - Flooring	**20**	**2014**	55	55		**55**	**Epoxy; walls painted 2018**
Aquatic Cntr West - Boys Locker Rooms - Lockers	**20**	**2014**	55	55		**55**	**walls painted 2018; New Locker Hardware 2022**
Aquatic Cntr West - Girls Locker Rooms - Lockers	**20**	**2014**	55	55		**55**	**New Locker Hardware 2022**
Aquatic Cntr West - Boys Locker Rooms - Benches	**50**	**2014**	82	82		**82**	**concrete**
Aquatic Cntr West - Girls Locker Rooms - Benches	**50**	**2014**	82	82		**82**	**concrete**
Aquatic Cntr West - Large Pool Liners	**15**	**2014**	40	40		**40**	
Aquatic Cntr West - Small Pool Liners	**15**	**2014**	40	15		**28**	**Faded**
Aquatic Cntr West - Bulkheads Surfacing	**15**	**2014**	40	15		**28**	
Aquatic Cntr West - Scoreboard	**15**	**2014**	40	35		**38**	

Arbor Creek MS

Year Built / Age 1994 / 29

Campus Square Footage 125,358

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1994**	**42**				
Arbor Creek MS - HVAC - Original	**20**	**2013**	50	50	-17%	**42**	**RTU**
Arbor Creek MS - HVAC - 2008 Addition	**20**	**2008**	25	25	-17%	**21**	**RTU (Weight Rm)**
Arbor Creek MS - HVAC - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	
Arbor Creek MS - HVAC - Controls	**20**	**2013**	50	50		**50**	**Controls = Alerton**
Arbor Creek MS - Ceiling and Lights - Original	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**Weight Rm**
Arbor Creek MS - Ceiling and Lights - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	
Arbor Creek MS - Roof - Flat	**20**	**2013**	50	50	-50%	**25**	
Arbor Creek MS - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	-50%	**13**	
Arbor Creek MS - Roof - Flat - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	
Arbor Creek MS - Electrical Switchgear	**30**	**1994**	3	3	3%	**3**	
Arbor Creek MS - Elevator	**25**	**1994**	-16	5	3%	**-5**	**Dover**
Arbor Creek MS - Fire Safety - Fire Alarm	**20**	**2013**	50	40	-12%	**40**	**Edwards EST 2 - Limited Parts**
Arbor Creek MS - Fire Safety - ERRS	**-**					**-**	
Arbor Creek MS - Fire Safety - Sprinkler System	**50**	**1994**	42	42	14%	**48**	
Arbor Creek MS - Food Service Boilers	**20**	**2017**	70	70		**70**	
Arbor Creek MS - Food Service Freezers	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Generator	**40**	**2013**	75	75		**75**	**Generac - Diesel; 150 KW**
Arbor Creek MS - Flooring - Classroom	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Corridors	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Library	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Offices	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Cafeteria	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Kitchen	**50**	**1994**	42	35		**39**	**Terrazzo - small cracks**
Arbor Creek MS - Flooring - Band	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Choir	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - Orchestra	**20**	**2013**	50	50		**50**	**LVT**
Arbor Creek MS - Flooring - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**LVT**
Arbor Creek MS - Plastic Laminate	**40**	**2008**	63	63		**63**	
Arbor Creek MS - Doors	**20**	**2013**	50	50		**50**	**Dark Mahongany**
Arbor Creek MS - Door Hardware	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Casework (Built-Ins)	**20**	**1994**	-45	0		**-23**	**Art, Science & Office 2013**
Arbor Creek MS - Restrooms - Faculty	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Restrooms - Student	**20**	**2013**	50	50		**50**	**Solid plastic partitions**
Arbor Creek MS - Marquee	**15**	**2017**	60	60		**60**	**LED; Digital**
Arbor Creek MS - Paving - Parking Lots	**50**	**1994**	42	42		**42**	
Arbor Creek MS - Paving - Sidewalks	**40**	**1994**	28	28		**28**	
Arbor Creek MS - Exterior Lighting	**20**	**2013**	50	50		**50**	**Pole lights LED bulbs 2021**
Arbor Creek MS - Paint - Commons	**15**	**2013**	33	33		**33**	**Maintained paint - touched up 2018**
Arbor Creek MS - Paint - Cafeteria	**15**	**2013**	33	33		**33**	**Lower walls painted 2018**
Arbor Creek MS - Paint - Gyms	**20**	**2013**	50	50		**50**	**Lower walls painted 2018**
Arbor Creek MS - Paint - Exterior	**20**	**2013**	50	50		**50**	
Arbor Creek MS - Paint - Hallways	**20**	**2013**	50	50		**50**	**Painted as needed 2018**
Sports and Fine Arts							
Arbor Creek MS - Perf Arts - Curtains	**-**					**-**	
Arbor Creek MS - Perf Arts - Cafetorium Lighting	**25**	**2013**	60	60		**60**	
Arbor Creek MS - Asphalt Track	**20**	**2014**	55	45		**50**	**partial replacement on far side of track - some minor cracking due to soil & heat. Repainted track lines 2022**
Arbor Creek MS - Field Lights	**-**					**-**	
Arbor Creek MS - Bleachers - Exterior	**-**					**-**	
Arbor Creek MS - Bleachers - Interior	**30**	**1994**	3	3		**3**	**Added aisles and railings 2019**
Arbor Creek MS - Gym Main - Flooring	**40**	**1994**	28	28		**28**	**Sanded and Refinished 2021**
Arbor Creek MS - Gym Aux - Flooring	**40**	**2018**	88	88		**88**	
Arbor Creek MS - Athletic Lockers	**40**	**1994**	28	28		**28**	
Arbor Creek MS - Athletic Benches	**50**	**2013**	80	80		**80**	**Concrete**
Arbor Creek MS - Athletic Partitions	**20**	**2013**	50	50		**50**	**Solid Plastic**
Arbor Creek MS - Weight Room Floor	**20**	**2008**	25	25		**25**	**Rubber**

Briarhill MS

Year Built / Age 1995 / 28

Campus Square Footage 125,600

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1995**	**44**				
Briarhill MS - HVAC- Original	**20**	**2014**	55	55	-5%	**52**	**RTU & VRF**
Briarhill MS - HVAC - 2008 Addition	**20**	**2008**	25	25	-5%	**24**	**Weight Room**
Briarhill MS - HVAC - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	
Briarhill MS - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Briarhill MS - Ceiling and Lights - Original	**20**	**2014**	55	55		**55**	**LED**
Briarhill MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**LED**
Briarhill MS - Ceiling and Lights - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	**LED**
Briarhill MS - Roof - Flat	**20**	**2018**	75	75	-5%	**71**	**2017 hail damage insurance replacement**
Briarhill MS - Roof - Standing Seam	**30**	**2018**	83	83	-5%	**79**	**2017 hail damage insurance replacement**
Briarhill MS - Roof - 2008 Addition	**20**	**2018**	75	75	-5%	**71**	**Weight Room; 2017 hail damage insurance replacement**
Briarhill MS - Roof - 2020 Fine Arts Addition	**20**	**2020**	85	85		**85**	
Briarhill MS - Electrical Switchgear	**30**	**1995**	7	7	-6%	**6**	**Square D**
Briarhill MS - Elevator	**25**	**1995**	-12	5	10%	**-3**	**Dover**
Briarhill MS - Fire Safety - Fire Alarm	**20**	**2004**	5	5	0%	**5**	**Edwards EST 2 - Limited Parts; New smoke detectors 2014**
Briarhill MS - Fire Safety - ERRS	**-**					**-**	
Briarhill MS - Fire Safety - Sprinkler System	**50**	**1995**	44	44	-15%	**37**	
Briarhill MS - Food Service Boilers	**20**	**2004**	5	5		**5**	**Tank and Heater 2004**
Briarhill MS - Food Service Freezers	**20**	**2014**	55	55		**55**	
Briarhill MS - Generator	**40**	**2015**	80	80		**80**	**Cummins - Diesel; 200 KW**
Briarhill MS - Flooring - Classrooms	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Corridors	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Library	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Cafeteria	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Kitchen	**50**	**1995**	44	40		**42**	**Terrazzo**
Briarhill MS - Flooring - Band	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Choir	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - Orchestra	**20**	**2015**	60	60		**60**	**VCT**
Briarhill MS - Flooring - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**VCT**
Briarhill MS - Plastic Laminate	**40**	**1995**	30	30		**30**	**Tack wall in classrooms failing**
Briarhill MS - Doors	**20**	**2015**	60	60		**60**	
Briarhill MS - Door Hardware	**20**	**2015**	60	60		**60**	**Need to look at replacing exterior**
Briarhill MS - Casework (Built-Ins)	**20**	**2015**	60	60		**60**	
Briarhill MS - Restrooms - Faculty	**20**	**2015**	60	60		**60**	
Briarhill MS - Restrooms - Student	**20**	**2015**	60	60		**60**	
Briarhill MS - Marquee	**30**	**1995**	7	7		**7**	**Not lit**
Briarhill MS - Paving - Parking Lots	**50**	**1995**	44	40		**42**	**Some breakups and cracking.**
Briarhill MS - Paving - Sidewalks	**40**	**1995**	30	25		**28**	**Front entry walkway cracking**
Briarhill MS - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
Briarhill MS - Paint - Commons	**15**	**2015**	47	47		**47**	**Admin offices painted Summer 2017 - 2018**
Briarhill MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	**Lower walls painted 2018**
Briarhill MS - Paint - Gyms	**20**	**2015**	60	60		**60**	**Lower walls painted 2019**
Briarhill MS - Paint - Exterior	**20**	**2015**	60	65		**63**	**Light poles, metal doors & posts painted 2018**
Briarhill MS - Paint - Hallways	**20**	**2015**	60	60		**60**	
Sports and Fine Arts							
Briarhill MS - Perf Arts - Curtains	**-**					**-**	
Briarhill MS - Perf Arts - Cafetorium Lighting	**25**	**2014**	64	64		**64**	**LED**
Briarhill MS - Asphalt Track	**20**	**2005**	10	10		**10**	**Cracked edge / underside / east drain:deep hole - sealed in 2019; heavy use**
Briarhill MS - Field Lights	**-**					**-**	
Briarhill MS - Bleachers - Exterior	**-**					**-**	
Briarhill MS - Bleachers - Interior	**30**	**1995**	7	7		**7**	**Castors Replaced 2019**
Briarhill MS - Gym Main - Flooring	**40**	**1995**	30	30		**30**	
Briarhill MS - Gym Aux - Flooring	**40**	**1995**	30	30		**30**	**2020 Sanded and Refinished**
Briarhill MS - Athletic Lockers	**40**	**1995**	30	30		**30**	**Hardware in bad shape**
Briarhill MS - Athletic Benches	**50**	**2015**	84	84		**84**	**concrete**
Briarhill MS - Athletic Partitions	**20**	**2015**	60	60		**60**	
Briarhill MS - Weight Room Floor	**20**	**2008**	25	25		**25**	**Rubber**

Creek Valley MS

Year Built / Age 2001 / 22

Campus Square Footage 129,724

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2001**	**56**				
Creek Valley MS - HVAC	**20**	**2001**	-10	5	3%	**-2**	**RTU**
Creek Valley MS - HVAC - 2008 Addition	**20**	**2008**	25	25	3%	**26**	**Weight Rm**
Creek Valley MS - HVAC - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Creek Valley MS - HVAC - Controls	**20**	**2001**	-10	5		**-3**	**Controls = I/net**
Creek Valley MS - Ceiling and Lights	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	15		**20**	**Weight Rm**
Creek Valley MS - Ceiling and Lights - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Creek Valley MS - Roof - Flat	**20**	**2020**	85	85	10%	**94**	**4-Ply Built-up, standing seam; 6/2018 Storm Damage**
Creek Valley MS - Roof - 2008 Addition	**20**	**2020**	85	85	10%	**94**	**6/2018 Storm Damage**
Creek Valley MS - Roof - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Creek Valley MS - Roof - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Creek Valley MS - Electrical Switchgear	**30**	**2001**	27	27	12%	**30**	
Creek Valley MS - Elevator	**25**	**2001**	12	12	-5%	**11**	**Dover**
Creek Valley MS - Fire Safety - Fire Alarm	**20**	**2001**	-10	5	16%	**-2**	**Edwards EST 2 - Limited Parts**
Creek Valley MS - Fire Safety - ERRS	**-**					**-**	
Creek Valley MS - Fire Safety - Sprinkler System	**50**	**2001**	56	56	5%	**59**	
Creek Valley MS - Food Service Boilers	**20**	**2017**	70	70		**70**	
Creek Valley MS - Food Service Freezers	**20**	**2001**	-10	5		**-3**	**Walk in cooler coil replaced 2023**
Creek Valley MS - Generator	**-**					**-**	
Creek Valley MS - Flooring - Classroom VCT	**20**	**2017**	70	70		**70**	**VCT**
Creek Valley MS - Flooring - Classroom VCT	**20**	**2001**	-10	5		**-3**	**VCT**
Creek Valley MS - Flooring - Corridors	**20**	**2001**	-10	5		**-3**	**VCT**
Creek Valley MS - Flooring - Library	**20**	**2017**	70	70		**70**	**LVT**
Creek Valley MS - Flooring - Offices	**20**	**2017**	70	70		**70**	**LVT**
Creek Valley MS - Flooring - Cafeteria	**20**	**2001**	-10	5		**-3**	**VCT - joints showing**
Creek Valley MS - Flooring - Kitchen	**50**	**2001**	56	40		**48**	**Terrazzo**
Creek Valley MS - Flooring - Band	**20**	**2017**	70	70		**70**	**VCT**
Creek Valley MS - Flooring - Choir	**20**	**2017**	70	70		**70**	**VCT**
Creek Valley MS - Flooring - Orchestra	**20**	**2017**	70	70		**70**	**VCT**
Creek Valley MS - Flooring - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	**VCT**
Creek Valley MS - Plastic Laminate	**40**	**2001**	45	45		**45**	
Creek Valley MS - Doors	**20**	**2001**	-10	5		**-3**	**Golden Oak**
Creek Valley MS - Door Hardware	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Casework (Built-Ins)	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Casework (Built-Ins)	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Restrooms - Faculty	**20**	**2001**	-10	5		**-3**	
Creek Valley MS - Restrooms - Student	**20**	**2001**	-10	5		**-3**	**Ceramic Tile floor, cmu painted walls, P-Lam partitions**
Creek Valley MS - Marquee	**30**	**2001**	27	10		**18**	**Brick**
Creek Valley MS - Paving - Parking Lots	**50**	**2001**	56	50		**53**	**Concrete, some cracking @ control joints**
Creek Valley MS - Paving - Sidewalks	**40**	**2001**	45	30		**38**	**Sinkage of 3-4" at door 5.**
Creek Valley MS - Exterior Lighting	**20**	**2001**	-10	10		**0**	**Pole lights LED bulbs 2021**
Creek Valley MS - Paint - Commons	**15**	**2015**	47	47		**47**	**2017 All areas & office complex**
Creek Valley MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	**Lower walls 2017**
Creek Valley MS - Paint - Gyms	**20**	**2013**	50	50		**50**	**Did not paint ceiling / stripe in 2013; Upper Gym painted Summer 2017**
Creek Valley MS - Paint - Exterior	**20**	**2016**	65	65		**65**	
Creek Valley MS - Paint - Hallways	**20**	**2016**	65	65		**65**	**Athletic Area: 2015**
Sports and Fine Arts							
Creek Valley MS - Perf Arts - Curtains	**-**					**-**	
Creek Valley MS - Perf Arts - Cafetorium Lighting	**25**	**2001**	12	10		**11**	
Creek Valley MS - Asphalt Track	**20**	**2021**	90	90		**90**	
Creek Valley MS - Field Lights	**-**					**-**	
Creek Valley MS - Bleachers - Exterior	**-**					**-**	
Creek Valley MS - Bleachers - Interior	**30**	**2001**	27	27		**27**	
Creek Valley MS - Gym Main - Flooring	**40**	**2001**	45	45		**45**	**2020 Sanded and refinished (mascot added)**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Creek Valley MS - Gym Aux - Flooring	**40**	**2001**	45	45		**45**	**2020 Sanded and refinished (mascot added)**
Creek Valley MS - Athletic Lockers	**40**	**2001**	45	45		**45**	
Creek Valley MS - Athletic Benches	**20**	**2001**	-10	5		**-3**	**Varsity:epoxy over wood; Need to plan soon**
Creek Valley MS - Athletic Partitions	**20**	**2001**	-10	5		**-3**	**P-Lam; Water Damage**
Creek Valley MS - Weight Room Floor	**20**	**2008**	25	20		**23**	**Rubber**

DeLay MS

Year Built / Age 1977 / 46

Campus Square Footage 182,385

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1977**	**8**				
DeLay MS - HVAC	**20**	**2010**	35	35	10%	**38**	**RTU**
Delay MS - HVAC - 2021 Fine Arts Addition	**20**	**2021**	90	90		**90**	
DeLay MS - HVAC - Control	**20**	**2010**	35	30		**33**	**Controls = Alerton (control)/Automated Logic (hardware)**
DeLay MS - Ceiling and Lights	**20**	**2010**	35	35		**35**	**T5**
DeLay MS - Ceiling and Lights - 2021 Addition	**20**	**2021**	90	90		**90**	**LED**
DeLay MS - Roof - Flat	**20**	**2018**	75	75	15%	**86**	**2017 hail damage insurance replacement; issues with skylights**
DeLay MS - Roof - Flat - 2021 Fine Art Addition	**20**	**2021**	90	90		**90**	
DeLay MS - Electrical Switchgear	**30**	**2010**	57	57	9%	**62**	
DeLay MS - Elevator #1 (Front)	**25**	**2010**	48	48	10%	**53**	**Schindler**
DeLay MS - Elevator #2 (Back)	**25**	**2010**	48	48	20%	**57**	**Schindler**
DeLay MS - Fire Safety - Fire Alarm	**20**	**2010**	35	35	-28%	**25**	**Harrington**
DeLay MS - Fire Safety - ERRS	**-**					**-**	
DeLay MS - Fire Safety - Sprinkler System	**50**	**2010**	74	74	11%	**82**	
DeLay MS - Food Service Boilers	**20**	**2009**	30	25		**28**	**2 tanks - 1 scheduled for replacement 2023**
DeLay MS - Food Service Freezers	**20**	**2010**	35	35		**35**	
DeLay MS - Generator	**-**					**-**	
DeLay MS - Lift Station	**20**	**2010**	35	35		**35**	
DeLay MS - Flooring - Classroom VCT	**20**	**2010**	35	35		**35**	**VCT**
DeLay MS - Flooring - Corridors	**20**	**2010**	35	35		**35**	**VCT - Hallway lockers are showing wear.**
DeLay MS - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet**
DeLay MS - Flooring - Offices	**15**	**2010**	13	13		**13**	**Carpet**
DeLay MS - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	**VCT; Campus reports Café is too small, review size in future Bond**
DeLay MS - Flooring - Kitchen	**50**	**2010**	74	74		**74**	**Terrazzo**
DeLay MS - Flooring - Band	**15**	**2010**	13	13		**13**	**Carpet**
DeLay MS - Flooring - Choir	**20**	**2010**	35	35		**35**	**VCT**
DeLay MS - Flooring - Orchestra	**15**	**2010**	13	13		**13**	**Carpet**
Delay MS - Flooring - 2020 Fine Art Addition	**20**	**2021**	90	90		**90**	
DeLay MS - Plastic Laminate	**40**	**2010**	68	68		**68**	
DeLay MS - Doors	**20**	**2010**	35	35		**35**	**Mahogany**
DeLay MS - Door Hardware	**20**	**2010**	35	35		**35**	
DeLay MS - Casework (Built-Ins)	**20**	**2010**	35	35		**35**	
DeLay MS - Restrooms - Faculty	**20**	**2010**	35	35		**35**	
DeLay MS - Restrooms - Student	**20**	**2010**	35	35		**35**	**CMU partitions, ceramic tile floor**
DeLay MS - Marquee	**30**	**2023**	100	100		**100**	**Digital**
DeLay MS - Paving - Parking Lots	**50**	**2010**	74	74		**74**	
DeLay MS - Paving - Asphalt Parking Lots	**20**	**1995**	-40	0		**-20**	**Partial asphalt - Repairs needed**
DeLay MS - Paving - Sidewalks	**40**	**1977**	-15	5		**-5**	**Repairs needed**
DeLay MS - Exterior Lighting	**20**	**2010**	35	35		**35**	
DeLay MS - Paint - Commons	**15**	**2019**	73	73		**73**	
DeLay MS - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
DeLay MS - Paint - Gyms	**20**	**2022**	95	95		**95**	
DeLay MS - Paint - Exterior	**20**	**2010**	35	35		**35**	
DeLay MS - Paint - Hallways	**20**	**2021**	90	90		**90**	
Sports and Fine Arts							
DeLay MS - Perf Arts - Curtains	**20**	**2010**	35	35		**35**	
DeLay MS - Perf Arts - Cafetorium Lighting	**25**	**2010**	48	48		**48**	
DeLay MS - Asphalt Track	**20**	**2010**	35	30		**33**	**A few cracks concrete curb both sides.**
DeLay MS - Field Lights	**-**					**-**	
DeLay MS - Bleachers - Exterior	**-**					**-**	
DeLay MS - Bleachers - Interior	**30**	**2010**	57	57		**57**	
DeLay MS - Gym Main - Flooring	**40**	**2000**	43	43		**43**	**2020 Sanded and refinished**
DeLay MS - Gym Aux - Flooring	**40**	**2000**	43	43		**43**	**2020 Sanded and refinished**
DeLay MS - Athletic Lockers	**40**	**2010**	68	68		**68**	
DeLay MS - Athletic Benches	**50**	**2010**	74	74		**74**	**Concrete**
DeLay MS - Athletic Partitions	**20**	**2010**	35	35		**35**	**CMU**
WEIGHT ROOM 2010							
DeLay MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
DeLay MS - Weight Room Roof - Metal	**30**	**2018**	83	83		**83**	**2017 hail damage insurance replacement**
DeLay MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber; interior painted 2019**

Downing MS

Year Built / Age 2002 / 21

Campus Square Footage 128,660

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2002**	**58**				
Downing MS - HVAC	**20**	**2002**	-5	5	-4%	**0**	**RTU**
Downing MS - HVAC - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**RTU**
Downing MS - HVAC - Controls	**20**	**2002**	-5	5		**0**	**Controls = I/net**
Downing MS - Ceiling and Lights	**20**	**2002**	-5	5		**0**	**T-8**
Downing MS - Ceiling and Lights - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**LED**
Downing MS - Roof - Flat	**20**	**2002**	-5	5	-9%	**0**	
Downing MS - Roof - Flat - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	
Downing MS - Roof - Standing Seam	**30**	**2002**	30	30	-9%	**27**	
Downing MS - Electrical Switchgear	**30**	**2002**	30	30	10%	**33**	**Siemens**
Downing MS - Elevator	**25**	**2002**	16	16	13%	**18**	**Thyssen Krupp**
Downing MS - Fire Safety - Fire Alarm	**20**	**2002**	-5	5	8%	**0**	**Edwards EST 2 - Limited Parts**
Downing MS - Fire Safety - ERRS	**-**					**-**	
Downing MS - Fire Safety - Sprinkler System	**50**	**2002**	58	58	-18%	**48**	
Downing MS - Food Service Boilers	**20**	**1999**	-20	0		**-10**	**Tank 2005**
Downing MS - Food Service Freezers	**20**	**2002**	-5	5		**0**	
Downing MS - Generator	**-**					**-**	
Downing MS - Flooring - Classrooms Carpet	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - Classrooms VCT	**20**	**2003**	0	5		**3**	**VCT**
Downing MS - Flooring - Corridors	**20**	**2002**	-5	5		**0**	**VCT**
Downing MS - Flooring - Library	**20**	**2013**	50	50		**50**	**LVT**
Downing MS - Flooring - Offices	**15**	**2017**	60	60		**60**	**Carpet/VCT front**
Downing MS - Flooring - Cafeteria	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - Kitchen	**50**	**2002**	58	58		**58**	**Terrazzo - Good Shape**
Downing MS - Flooring - Band	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - Choir	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - Orchestra	**20**	**2017**	70	70		**70**	**VCT**
Downing MS - Flooring - 2020 Fine Art Addition	**20**	**2020**	85	85		**85**	**VCT**
Downing MS - Plastic Laminate	**40**	**2002**	48	48		**48**	
Downing MS - Doors	**20**	**2002**	-5	5		**0**	**Medium Brown**
Downing MS - Door Hardware	**20**	**2002**	-5	5		**0**	
Downing MS - Casework (Built-Ins)	**20**	**2002**	-5	5		**0**	**Maroon Base/Tan Counter**
Downing MS - Restrooms - Faculty	**20**	**2002**	-5	5		**0**	
Downing MS - Restrooms - Student	**20**	**2002**	-5	5		**0**	**P-Lam partitions**
Downing MS - Marquee	**30**	**2002**	30	30		**30**	**not lit**
Downing MS - Paving - Parking Lots	**50**	**2002**	58	58		**58**	**Good - Minimal Heaving**
Downing MS - Paving - Sidewalks	**40**	**2002**	48	48		**48**	
Downing MS - Exterior Lighting	**20**	**2002**	-5	5		**0**	**Orig lights/white**
Downing MS - Paint - Commons	**15**	**2019**	73	73		**73**	
Downing MS - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
Downing MS - Paint - Gyms	**20**	**2013**	50	50		**50**	
Downing MS - Paint - Exterior	**20**	**2018**	75	75		**75**	**Summer 2018 Paint exterior plaster walls**
Downing MS - Paint - Hallways	**20**	**2020**	85	85		**85**	
Sports and Fine Arts							
Downing MS - Perf Arts - Curtains	**-**					**-**	
Downing MS - Perf Arts - Cafetorium Lighting	**25**	**2002**	16	16		**16**	**6 Fixtures**
Downing MS - Asphalt Track	**20**	**2002**	-5	0		**-3**	**Few cracks; need to fill in cracks or re-seal**
Downing MS - Field Lights	**-**					**-**	
Downing MS - Bleachers - Exterior	**40**	**2002**	48	40		**44**	**1 set, portable, 3-tier; fair condition**
Downing MS - Bleachers - Interior	**30**	**2002**	30	30		**30**	**Plastic original**
Downing MS - Gym Main - Flooring	**40**	**2002**	48	48		**48**	**Sanding & Refinishing scheduled Summer 2022**
Downing MS - Gym Aux - Flooring	**40**	**2002**	48	48		**48**	**needs sanding**
Downing MS - Athletic Lockers	**40**	**2002**	48	35		**41**	**Need Paint**
Downing MS - Athletic Benches	**20**	**2002**	-5	5		**0**	**Epoxy tops**
Downing MS - Athletic Partitions	**20**	**2002**	-5	0		**-3**	**P-Lam**
WEIGHT ROOM 2008							
Downing MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Downing MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Downing MS - Weight Room Flooring	**20**	**2008**	25	15		**20**	**Rubber**

Durham MS

Year Built / Age 2002 / 21

Campus Square Footage 129,757

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2002**	**58**				
Durham MS - HVAC - Original	**20**	**2002**	-5	5	-5%	**0**	**RTU**
Durham MS - HVAC - 2008 Addition	**20**	**2008**	25	25	-5%	**24**	
Durham MS - HVAC - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Durham MS - HVAC - Controls	**20**	**2002**	-5	5		**0**	**Controls = I/net**
Durham MS - Ceiling and Lights - Original	**20**	**2002**	-5	5		**0**	
Durham MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	
Durham MS - Ceiling and Lights - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Durham MS - Roof - Flat	**20**	**2002**	-5	5	-3%	**0**	**4-Ply Built-up**
Durham MS - Roof - Standing Seam	**30**	**2002**	30	25	-3%	**27**	
Durham MS - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	-3%	**24**	
Durham MS - Roof - Flat - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	
Durham MS - Electrical Switchgear	**30**	**2002**	30	30	-5%	**28**	
Durham MS - Elevator	**25**	**2002**	16	15	-4%	**15**	**Thyssen Krupp; wall to elevator needs to be removed**
Durham MS - Fire Safety - Fire Alarm	**20**	**2002**	-5	5	8%	**0**	**Edwards EST 2 - Limited Parts**
Durham MS - Fire Safety - ERRS	**-**					**-**	
Durham MS - Fire Safety - Sprinkler System	**50**	**2002**	58	58	10%	**64**	
Durham MS - Food Service Boilers	**20**	**2008**	25	25		**25**	
Durham MS - Food Service Freezers	**20**	**2002**	-5	5		**0**	
Durham MS - Generator	**-**					**-**	
Durham MS - Flooring - Classrooms-VCT	**20**	**2017**	70	70		**70**	**VCT**
Durham MS - Flooring - Classrooms-VCT	**20**	**2002**	-5	5		**0**	**VCT - C-Tile**
Durham MS - Flooring - Corridors	**20**	**2002**	-5	5		**0**	**VCT; wood base**
Durham MS - Flooring - Library	**20**	**2017**	70	70		**70**	**LVT**
Durham MS - Flooring - Offices	**15**	**2014**	40	40		**40**	**Carpet - half VCT**
Durham MS - Flooring - Cafeteria	**20**	**2002**	-5	5		**0**	**VCT**
Durham MS - Flooring - Kitchen	**50**	**2002**	58	58		**58**	**Terrazzo**
Durham MS - Flooring - Band	**20**	**2017**	70	70		**70**	**VCT**
Durham MS - Flooring - Choir	**20**	**2017**	70	70		**70**	**VCT**
Durham MS - Flooring - Orchestra	**20**	**2017**	70	70		**70**	**VCT**
Durham MS - Flooring - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	**VCT**
Durham MS - Plastic Laminate	**40**	**2008**	63	63		**63**	
Durham MS - Doors	**20**	**2002**	-5	5		**0**	**Medium Dark**
Durham MS - Door Hardware	**20**	**2002**	-5	5		**0**	
Durham MS - Casework (Built-Ins)	**20**	**2002**	-5	5		**0**	**Grey tops**
Durham MS - Restrooms - Faculty	**20**	**2002**	-5	5		**0**	
Durham MS - Restrooms - Student	**20**	**2002**	-5	5		**0**	**Ceramic Tile floors/walls, P-Lam partitions**
Durham MS - Restrooms - 2008 Addition	**20**	**2008**	25	25		**25**	
Durham MS - Marquee	**30**	**2002**	30	20		**25**	**Brick**
Durham MS - Paving - Parking Lots	**50**	**2002**	58	58		**58**	**Concrete**
Durham MS - Paving - Sidewalks	**40**	**2002**	48	48		**48**	**Concrete, no heaving**
Durham MS - Exterior Lighting	**20**	**2002**	-5	5		**0**	
Durham MS - Paint - Commons	**15**	**2018**	67	67		**67**	**2018 - 2019**
Durham MS - Paint - Cafeteria	**15**	**2019**	73	73		**73**	**2019**
Durham MS - Paint - Gyms	**20**	**2019**	80	80		**80**	**2019**
Durham MS - Paint - Exterior	**20**	**2018**	75	75		**75**	**Summer 2018**
Durham MS - Paint - Hallways	**20**	**2019**	80	80		**80**	**2019**
Sports and Fine Arts							
Durham MS - Perf Arts - Curtains	**-**					**-**	
Durham MS - Perf Arts - Cafetorium Lighting	**25**	**2002**	16	16		**16**	
Durham MS - Asphalt Track	**20**	**2021**	90	90		**90**	
Durham MS - Field Lights	**-**					**-**	
Durham MS - Bleachers - Exterior	**-**					**-**	
Durham MS - Bleachers - Interior	**30**	**2002**	30	30		**30**	
Durham MS - Gym Main - Flooring	**40**	**2002**	48	48		**48**	**Sanding & Refinishing scheduled Summer 2022**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Durham MS - Gym Aux - Flooring	40	2002	48	48		48	Sanding & Refinishing scheduled Summer 2022
Durham MS - Athletic Lockers	40	2002	48	48		48	
Durham MS - Athletic Benches	20	2002	-5	5		0	Epoxy is bad
Durham MS - Athletic Partitions	20	2002	-5	0		-3	P-Lam
Durham MS - Weight Room Floor	20	2008	25	20		23	Rubber

Forestwood MS

Year Built / Age 1994 / 29

Campus Square Footage 143,865

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1994**	**42**				
Forestwood MS - HVAC	**20**	**2011**	40	40	7%	**43**	**RTU**
Forestwood MS - HVAC - 2001 Addition	**20**	**2011**	40	40	7%	**43**	**RTU**
Forestwood MS - HVAC - 2008 Addition	**20**	**2008**	25	25	7%	**27**	**Weight Room addition; RTU**
Forestwood MS - HVAC - Contols	**20**	**2011**	40	40		**40**	**Controls = Alerton**
Forestwood MS - Ceiling and Lights	**20**	**2011**	40	40		**40**	**T5**
Forestwood MS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**T5**
Forestwood MS - Roof - Flat	**20**	**2011**	40	40	12%	**45**	**4 ply built up**
Forestwood MS - Roof - Standing Seam	**30**	**2011**	60	60	12%	**67**	
Forestwood MS - Roof - 2001 Addition	**20**	**2011**	40	40	12%	**45**	**4 ply built up**
Forestwood MS - Roof - 2008 Addition	**20**	**2008**	25	25	12%	**28**	**4 ply built up**
Forestwood MS - Electrical Switchgear	**30**	**2011**	60	60	0%	**60**	**Square D**
Forestwood MS - Elevator	**25**	**1994**	-16	5	14%	**-5**	**Dover; needs fire hat service**
Forestwood MS - Fire Safety - Fire Alarm	**20**	**2004**	5	5	-8%	**5**	**Edwards EST 2 - Limited Parts**
Forestwood MS - Fire Safety - ERRS	**-**					**-**	
Forestwood MS - Fire Safety - Sprinkler System	**50**	**1994**	42	42	-50%	**21**	
Forestwood MS - Food Service Boilers	**20**	**2022**	95	95		**95**	
Forestwood MS - Food Service Freezers	**20**	**2006**	15	15		**15**	
Forestwood MS - Generator	**40**	**2011**	70	70		**70**	**Cummins - Natural Gas; 140 KW**
Forestwood MS - Flooring - Classrooms	**20**	**2011**	40	40		**40**	**VCT**
Forestwood MS - Flooring - Corridors	**20**	**2011**	40	40		**40**	**VCT**
Forestwood MS - Flooring - Library	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Flooring - Offices	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Flooring - Cafeteria	**20**	**2011**	40	40		**40**	**VCT**
Forestwood MS - Flooring - Kitchen	**50**	**1994**	42	35		**39**	**Terrazzo, some cracking**
Forestwood MS - Flooring - Band - Original	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Flooring - Band - 2008	**15**	**2008**	0	5		**3**	**Carpet**
Forestwood MS - Flooring - Choir	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Flooring - Orchestra	**15**	**2011**	20	20		**20**	**Carpet**
Forestwood MS - Plastic Laminate	**40**	**2008**	63	63		**63**	
Forestwood MS - Doors	**20**	**1994**	-45	0		**-23**	**Gym Doors replaced 2011; Light color**
Forestwood MS - Door Hardware	**20**	**1994**	-45	0		**-23**	
Forestwood MS - Casework (Built-Ins)	**20**	**2011**	40	40		**40**	
Forestwood MS - Restrooms - Faculty	**20**	**2011**	40	40		**40**	
Forestwood MS - Restrooms - Student	**20**	**2011**	40	40		**40**	**Floor urinals**
Forestwood MS - Restrooms - 2001 Addition	**20**	**2011**	40	40		**40**	
Forestwood MS - Marquee	**30**	**1993**	0	5		**3**	**Capstone replaced & Direct Wired LED 2019**
Forestwood MS - Paving - Parking Lots	**50**	**1994**	42	42		**42**	**Concrete**
Forestwood MS - Paving - Sidewalks	**40**	**1994**	28	20		**24**	**Back area movement**
Forestwood MS - Exterior Lighting	**20**	**2018**	75	75		**75**	**Wall packs: 2011; Poles LED 2018-2019**
Forestwood MS - Paint - Commons	**15**	**2007**	-7	5		**-1**	
Forestwood MS - Paint - Cafeteria	**15**	**2021**	87	87		**87**	
Forestwood MS - Paint - Gyms	**20**	**2011**	40	40		**40**	
Forestwood MS - Paint - Exterior	**20**	**2018**	75	75		**75**	**New Rails 2015**
Forestwood MS - Paint - Hallways	**20**	**2011**	40	40		**40**	**2019 touch-ups**
Sports and Fine Arts							
Forestwood MS - Perf Arts - Curtains	**-**					**-**	
Forestwood MS - Perf Arts - Cafetorium Lighting	**25**	**2023**	100	100		**100**	
Forestwood MS - Asphalt Track	**20**	**2005**	10	10		**10**	**Some cracking; poor shape due trees; different than other MS Tracks**
Forestwood MS - Field Lights	**-**					**-**	
Forestwood MS - Bleachers - Exterior	**-**					**-**	
Forestwood MS - Bleachers - Interior	**30**	**1995**	7	7		**7**	
Forestwood MS - Gym Main - Flooring	**40**	**1994**	28	28		**28**	**Sanded & Refinished Oct. 2021**
Forestwood MS - Gym Aux - Flooring	**40**	**2022**	98	98		**98**	
Forestwood MS - Athletic Lockers	**40**	**2011**	70	70		**70**	
Forestwood MS - Athletic Benches	**50**	**2011**	76	76		**76**	**Concrete**
Forestwood MS - Athletic Partitions	**20**	**2011**	40	40		**40**	**Block and solid plastic**
Forestwood MS - Weight Room Floor	**20**	**2008**	25	25		**25**	**Rubber**

Griffin MS

Year Built / Age 2015 / 8

Campus Square Footage 182,266

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2015**	**84**				
Griffin MS - HVAC	**20**	**2015**	60	60	9%	**66**	**RTU**
Griffin MS - HVAC - Control	**20**	**2015**	60	60		**60**	**Controls = Alerton**
Griffin MS - Ceiling and Lights	**20**	**2015**	60	60		**60**	**Classrooms and partial hallway LED**
Griffin MS - Roof - Flat	**20**	**2015**	60	60	14%	**68**	
Griffin MS - Electrical Switchgear	**30**	**2015**	73	73	6%	**77**	
Griffin MS - Elevator	**25**	**2015**	68	68	16%	**79**	**Thyssen Krupp**
Griffin MS - Fire Safety - Fire Alarm	**20**	**2015**	60	25	4%	**44**	**Edwards EST 2 - Limited Parts/unsupported**
Griffin MS - Fire Safety - ERRS	**-**					**-**	
Griffin MS - Fire Safety - Sprinkler System	**50**	**2015**	84	84	18%	**99**	
Griffin MS - Food Service Boilers	**20**	**2015**	60	60		**60**	
Griffin MS - Food Service Freezers	**20**	**2015**	60	60		**60**	
Griffin MS - Generator	**40**	**2015**	80	80		**80**	**Kohler - Diesel; 350 KW**
Griffin MS - Flooring - Classrooms	**20**	**2015**	60	20		**40**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Corridors	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Library	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
Griffin MS - Flooring - Cafeteria	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Kitchen	**50**	**2015**	84	84		**84**	**Terrazzo**
Griffin MS - Flooring - Band	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Choir	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Flooring - Orchestra	**20**	**2015**	60	10		**35**	**VCT; 1st floor moisture in slab from original construction**
Griffin MS - Plastic Laminate	**40**	**2015**	80	80		**80**	
Griffin MS - Doors	**20**	**2015**	60	60		**60**	**Dark**
Griffin MS - Door Hardware	**20**	**2015**	60	60		**60**	
Griffin MS - Casework (Built-Ins)	**20**	**2015**	60	60		**60**	
Griffin MS - Restrooms - Faculty	**20**	**2015**	60	60		**60**	
Griffin MS - Restrooms - Student	**20**	**2015**	60	60		**60**	
Griffin MS - Marquee	**15**	**2015**	47	47		**47**	**LED; Digital**
Griffin MS - Paving - Parking Lots	**50**	**2015**	84	84		**84**	
Griffin MS - Paving - Sidewalks	**40**	**2015**	80	75		**78**	**some shifting**
Griffin MS - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
Griffin MS - Paint - Commons	**15**	**2015**	47	47		**47**	**Door Jams throughout the building painted in 2018**
Griffin MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	
Griffin MS - Paint - Gyms	**20**	**2015**	60	60		**60**	
Griffin MS - Paint - Exterior	**20**	**2015**	60	60		**60**	
Griffin MS - Paint - Hallways	**20**	**2015**	60	60		**60**	
Sports and Fine Arts							
Griffin MS - Perf Arts - Curtains	**20**	**2015**	60	60		**60**	
Griffin MS - Perf Arts - Cafetorium Lighting	**25**	**2015**	68	68		**68**	
Griffin MS - Asphalt Track	**20**	**2015**	60	60		**60**	**Lines repainted in 2020**
Griffin MS - Field Lights	**30**	**2015**	73	73		**73**	
Griffin - Stadium Scoreboard	**18**	**2015**	56	56		**56**	
Griffin - Lightning Detection		**2023**					**Tracking Only - Maintained by Athletics**
Griffin MS - Bleachers - Exterior	**40**	**2015**	80	80		**80**	
Griffin MS - Bleachers - Interior	**30**	**2015**	73	73		**73**	
Griffin MS - Gym Main - Flooring	**40**	**2015**	80	80		**80**	
Griffin MS - Gym Aux - Flooring	**40**	**2015**	80	80		**80**	
Griffin MS - Athletic Lockers	**40**	**2015**	80	80		**80**	
Griffin MS - Athletic Benches	**50**	**2015**	84	84		**84**	**Concrete**
Griffin MS - Athletic Partitions	**20**	**2015**	60	60		**60**	**Tile walls with FRP door**
Griffin MS - Weight Room Floor	**20**	**2015**	60	60		**60**	**Rubber**

Hedrick MS

Year Built / Age 2020 / 3

Campus Square Footage 176,047

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2020**	**94**				
Hedrick MS - Foundation	**50**	**2020**	94	94		**94**	
Hedrick MS - HVAC	**20**	**2020**	85	85	13%	**96**	**Aaon**
Hedrick MS - HVAC - Controls	**20**	**2020**	85	85		**85**	**Alerton**
Hedrick MS - Ceiling and Lights	**20**	**2020**	85	85		**85**	**LED**
Hedrick MS - Roof - Flat	**20**	**2020**	85	85	19%	**100**	**Mod bit**
Hedrick MS - Electrical Switchgear	**30**	**2020**	90	90	16%	**100**	**Square D**
Hedrick MS - Elevator	**25**	**2020**	88	88	20%	**100**	**Otis**
Hedrick MS - Fire Safety - Fire Alarm	**20**	**2020**	85	85	4%	**88**	**EST 3 Voice Evac**
Hedrick MS - Fire Safety - ERRS		**2020**				**-**	**Tracking only**
Hedrick MS - Fire Safety - Sprinkler System	**50**	**2020**	94	94	19%	**94**	
Hedrick MS - Storm Shelter	**50**	**2020**	94	94		**94**	
Hedrick MS - Food Service Boilers	**20**	**2020**	85	85		**85**	
Hedrick MS - Food Service Freezers	**20**	**2020**	85	85		**85**	
Hedrick MS - Generator	**40**	**2020**	93	60		**76**	**Cummins - Diesel; 200 kw; issues**
Hedrick MS - Flooring - Classrooms	**20**	**2020**	85	85		**85**	**LVT**
Hedrick MS - Flooring - Corridors	**30**	**2020**	90	90		**90**	**Concrete**
Hedrick MS - Flooring - Library	**15**	**2020**	80	80		**80**	**Carpet**
Hedrick MS - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
Hedrick MS - Flooring - Cafeteria	**30**	**2020**	90	90		**90**	**Concrete**
Hedrick MS - Flooring - Kitchen	**20**	**2020**	85	85		**85**	**Epoxy**
Hedrick MS - Flooring - Band	**20**	**2020**	85	85		**85**	**LVT**
Hedrick MS - Flooring - Choir	**20**	**2020**	85	85		**85**	**LVT**
Hedrick MS - Flooring - Orchestra	**20**	**2020**	85	85		**85**	**LVT**
Hedrick MS - Plastic Laminate	**40**	**2020**	93	93		**93**	
Hedrick MS - Doors	**20**	**2020**	85	85		**85**	**issues with storm doors**
Hedrick MS - Door Hardware	**20**	**2020**	85	85		**85**	
Hedrick MS - Casework (Built-Ins)	**20**	**2020**	85	85		**85**	**Laminate/Solid Surface Tops**
Hedrick MS - Restrooms - Faculty	**20**	**2020**	85	85		**85**	
Hedrick MS - Restrooms - Student	**20**	**2020**	85	85		**85**	
Hedrick MS - Marquee	**15**	**2020**	80	80		**80**	**Digital**
Hedrick MS - Paving - Parking Lots	**50**	**2020**	94	94		**94**	
Hedrick MS - Paving - Sidewalks	**40**	**2020**	93	93		**93**	
Hedrick MS - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
Hedrick MS - Paint - Commons	**15**	**2020**	80	80		**80**	
Hedrick MS - Paint - Cafeteria	**15**	**2020**	80	80		**80**	
Hedrick MS - Paint - Gyms	**20**	**2020**	85	85		**85**	
Hedrick MS - Paint - Exterior	**20**	**2020**	85	85		**85**	
Hedrick MS - Paint - Hallways	**20**	**2020**	85	85		**85**	
Sports and Fine Arts							
Hedrick MS - Perf Arts - Curtains	**20**	**2020**	85	85		**85**	
Hedrick MS - Perf Arts - Cafetorium Lighting	**25**	**2020**	88	88		**88**	**LED**
Hedrick MS - Asphalt Track	**20**	**2020**	85	85		**85**	
Hedrick MS - Bleachers - Interior	**30**	**2020**	90	90		**90**	
Hedrick MS - Gym Main - Flooring	**40**	**2020**	93	93		**93**	
Hedrick MS - Gym Aux - Flooring	**40**	**2020**	93	93		**93**	
Hedrick MS - Athletic Lockers	**40**	**2020**	93	93		**93**	
Hedrick MS - Athletic Benches	**50**	**2020**	94	94		**94**	**concrete**
Hedrick MS - Athletic Partitions	**20**	**2020**	85	85		**85**	
WEIGHT ROOM							
Hedrick MS - Weight Room Flooring	**20**	**2020**	85	85		**85**	**Rubber**

Huffines MS

Year Built / Age 1997 / 26

Campus Square Footage 125,186

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1997**	**48**				
Huffines MS - HVAC	**20**	**2015**	60	60	9%	**66**	**RTU & VRF**
Huffines MS - HVAC - 2022 Fine Art Addition	**20**	**2021**	90	90		**90**	
Huffines MS - HVAC - Controls	**20**	**2015**	60	60		**60**	**Controls = Alerton**
Huffines MS - Ceiling and Lights	**20**	**2015**	60	60		**60**	
Huffines MS - Ceiling and Lights - 2022 Fine Art Addition	**20**	**2021**	90	90		**90**	**LED**
Huffines MS - Roof - Flat	**20**	**2015**	60	60	1%	**61**	**Mod Bit**
Huffines MS - Roof - Standing Seam	**30**	**2015**	73	73	1%	**74**	
Huffines MS - Roof - Flat - 2022 Fine Art Addition	**20**	**2021**	90	90		**90**	
Huffines MS - Roof - Flat - 2022 Fine Art Addition	**20**	**2021**	90	90		**90**	
Huffines MS - Electrical Switchgear	**30**	**1997**	13	13	-3%	**13**	
Huffines MS - Elevator	**25**	**1997**	-4	5	-26%	**1**	**Schindler**
Huffines MS - Fire Safety - Fire Alarm	**20**	**2015**	60	60	-1%	**59**	**EST 3**
Huffines MS - Fire Safety - ERRS	**-**					**-**	
Huffines MS - Fire Safety - Sprinkler System	**50**	**1997**	48	45	-50%	**23**	
Huffines MS - Food Service Boilers	**20**	**2017**	70	70		**70**	
Huffines MS - Food Service Freezers	**20**	**2015**	60	60		**60**	
Huffines MS - Generator	**40**	**2015**	80	80		**80**	**Cummins - Diesel; 200 KW**
Huffines MS - Flooring - Classrooms	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Corridors	**20**	**2015**	60	20		**40**	**VCT; float loose**
Huffines MS - Flooring - Library	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Cafeteria	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Kitchen	**50**	**1997**	48	48		**48**	**Terrazzo**
Huffines MS - Flooring - Band	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Choir	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - Orchestra	**20**	**2015**	60	60		**60**	**VCT**
Huffines MS - Flooring - 2022 Fine Art Addition	**20**	**2022**	95	95		**95**	**VCT**
Huffines MS - Plastic Laminate	**40**	**2015**	80	80		**80**	
Huffines MS - Doors	**20**	**2015**	60	60		**60**	**Dark**
Huffines MS - Door Hardware	**20**	**2015**	60	60		**60**	
Huffines MS - Casework (Built-Ins)	**20**	**2015**	60	60		**60**	**Wet areas and countertops replaced 2015**
Huffines MS - Restrooms - Faculty	**20**	**2015**	60	60		**60**	
Huffines MS - Restrooms - Student	**20**	**2015**	60	60		**60**	
Huffines MS - Marquee	**15**	**2019**	73	73		**73**	**Digital**
Huffines MS - Paving - Parking Lots	**50**	**1997**	48	48		**48**	
Huffines MS - Paving - Sidewalks	**40**	**1997**	35	30		**33**	**Pavement drop at door #3**
Huffines MS - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
Huffines MS - Paint - Commons	**15**	**2015**	47	47		**47**	**Handrails throughout 2018**
Huffines MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	**2018 lower walls**
Huffines MS - Paint - Gyms	**20**	**2015**	60	60		**60**	**2018 maintain lower walls**
Huffines MS - Paint - Exterior	**20**	**2015**	60	60		**60**	
Huffines MS - Paint - Hallways	**20**	**2015**	60	60		**60**	
Sports and Fine Arts							
Huffines MS - Perf Arts - Curtains	**-**					**-**	
Huffines MS - Perf Arts - Cafetorium Lighting	**25**	**2015**	68	68		**68**	
Huffines MS - Asphalt Track	**20**	**2021**	90	90		**90**	
Huffines MS - Field Lights	**-**					**-**	
Huffines MS - Bleachers - Exterior	**-**					**-**	
Huffines MS - Bleachers - Interior	**30**	**1997**	13	13		**13**	**added aisles and railings 2022**
Huffines MS - Gym Main - Flooring	**40**	**2016**	83	83		**83**	**Replaced in 2016**
Huffines MS - Gym Aux - Flooring	**40**	**1997**	35	35		**35**	
Huffines MS - Athletic Lockers	**40**	**1997**	35	35		**35**	
Huffines MS - Athletic Benches	**50**	**2015**	84	84		**84**	**Concrete**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Huffines MS - Athletic Partitions	**20**	**2015**	60	60		**60**	**Solid Plastic**
WEIGHT ROOM 2008							
Huffines MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Huffines MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Huffines MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber**

Killian MS

Year Built / Age 2007 / 16

Campus Square Footage 180,481

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2007**	**68**				
Killian MS - HVAC	**20**	**2007**	20	25	-8%	**21**	**CHILLER**
Killian MS - HVAC - Controls	**20**	**2007**	20	20		**20**	**Controls = Alerton**
Killian MS - Ceiling and Lights	**20**	**2007**	20	20		**20**	
Killian MS - Roof - Flat	**20**	**2007**	20	20	-2%	**20**	**Kitchen**
Killian MS - Roof - Standing Seam	**30**	**2007**	47	47	-2%	**46**	
Killian MS - Electrical Switchgear	**30**	**2007**	47	47	3%	**48**	
Killian MS - Elevator	**25**	**2007**	36	30	-19%	**27**	**Thyssen Krupp**
Killian MS - Fire Safety - Fire Alarm	**20**	**2007**	20	20	10%	**22**	**Edwards EST 3**
Killian MS - Fire Safety - ERRS	-					-	
Killian MS - Fire Safety - Sprinkler System	**50**	**2007**	68	68	17%	**80**	
Killian MS - Food Service Boilers	**20**	**2007**	20	20		**20**	
Killian MS - Food Service Freezers	**20**	**2007**	20	25		**23**	**walk in cooler coil 2022**
Killian MS - Generator	**40**	**2007**	60	60		**60**	**Olympian - Diesel; 150 KW**
Killian MS - Flooring - Classrooms	**20**	**2007**	20	20		**20**	**VCT**
Killian MS - Flooring - Corridors	**20**	**2007**	20	20		**20**	**VCT**
Killian MS - Flooring - Library	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Flooring - Offices	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Flooring - Cafeteria	**20**	**2007**	20	20		**20**	**VCT**
Killian MS - Flooring - Kitchen	**50**	**2007**	68	68		**68**	**Terrazzo**
Killian MS - Flooring - Band	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Flooring - Choir	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Flooring - Orchestra	**15**	**2007**	-7	5		**-1**	**Carpet**
Killian MS - Plastic Laminate	**40**	**2007**	60	60		**60**	
Killian MS - Doors	**20**	**2007**	20	20		**20**	
Killian MS - Door Hardware	**20**	**2007**	20	20		**20**	
Killian MS - Casework (Built-Ins)	**20**	**2007**	20	20		**20**	
Killian MS - Restrooms - Faculty	**20**	**2007**	20	20		**20**	
Killian MS - Restrooms - Student	**20**	**2007**	20	20		**20**	**Block walls**
Killian MS - Marquee	**30**	**2007**	47	47		**47**	**Brick**
Killian MS - Marquee	**15**	**2010**	13	13		**13**	**LED Digital**
Killian MS - Paving - Parking Lots	**50**	**2007**	68	60		**64**	**Showing signs of some movement**
Killian MS - Paving - Sidewalks	**40**	**2007**	60	60		**60**	**Showing signs of movement; some pavers**
Killian MS - Exterior Lighting	**20**	**2007**	20	20		**20**	**Pole lights LED 2021 bulbs**
Killian MS - Paint - Commons	**15**	**2007**	-7	5		**-1**	**Boys/Girls athletics all - 2018**
Killian MS - Paint - Cafeteria	**15**	**2007**	-7	5		**-1**	
Killian MS - Paint - Gyms	**20**	**2021**	90	90		**90**	
Killian MS - Paint - Exterior	**20**	**2007**	20	20		**20**	
Killian MS - Paint - Hallways	**20**	**2007**	20	20		**20**	
Sports and Fine Arts							
Killian MS - Perf Arts - Curtains	**20**	**2007**	20	20		**20**	
Killian MS - Perf Arts - Stage Lighting	**25**	**2007**	36	36		**36**	
Killian MS - Asphalt Track	**20**	**2007**	20	20		**20**	**Concrete curbing, some cracking however in good shape given age. 2 shade structures added next to track 2019.**
Killian MS - Field Lights	-					-	
Killian MS - Bleachers - Exterior	-					-	
Killian MS - Bleachers - Interior	**30**	**2007**	47	47		**47**	
Killian MS - Gym Main - Flooring	**40**	**2007**	60	60		**60**	**Sanded and Refinished 2021**
Killian MS - Gym Aux - Flooring	**40**	**2007**	60	60		**60**	**Sanded and Refinished 2021**
Killian MS - Athletic Lockers	**40**	**2007**	60	60		**60**	
Killian MS - Athletic Benches	**20**	**2007**	20	25		**23**	**Plastic Wood Lumber**
Killian MS - Athletic Partitions	**20**	**2007**	20	20		**20**	**CMU**
WEIGHT ROOM 2008							
Killian MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Killian MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Killian MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber**

Lakeview MS

Year Built / Age 1989 / 34

Campus Square Footage 131,470

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1989**	**32**				
Lakeview MS - HVAC	**20**	**2007**	20	20	-13%	**17**	**RTU**
Lakeview MS - HVAC - 2008 Fine Art Addition	**20**	**2008**	25	25	-13%	**22**	**RTU**
Lakeview MS - HVAC - Controls	**20**	**2007**	20	20		**20**	**Controls = Alerton**
Lakeview MS - Ceiling and Lights	**20**	**2007**	20	15		**18**	
Lakeview MS - Roof - Flat	**20**	**2007**	20	20	-13%	**17**	**Mod Bit**
Lakeview MS - Roof Skylights	**25**	**2015**	68	68		**68**	
Lakeview MS - 2008 Fine Art Addition	**20**	**2007**	20	20	0%	**20**	**4 ply built up**
Lakeview MS - Electrical Switchgear	**30**	**2022**	97	97		**97**	
Lakeview MS - Elevator	**25**	**1998**	0	10	11%	**6**	**MCE - Installed 1989 & altered in 1998**
Lakeview MS - Fire Safety - Fire Alarm	**20**	**1999**	-20	0	-5%	**-10**	**New panel 2016 / original devices; Napco MS-52**
Lakeview MS - Fire Safety - ERRS	**-**					**-**	
Lakeview MS - Fire Safety - Sprinkler System	**50**	**1989**	32	32	7%	**34**	
Lakeview MS - Food Service Boilers	**20**	**2011**	40	40		**40**	
Lakeview MS - Food Service Freezers	**20**	**2007**	20	20		**20**	
Lakeview MS - Generator	**-**					**-**	
Lakeview MS - Flooring - Classrooms	**20**	**2019**	80	80		**80**	**VCT**
Lakeview MS - Flooring - Corridors	**20**	**2004**	5	5		**5**	**VCT**
Lakeview MS - Flooring - Library	**20**	**2019**	80	80		**80**	**LVT**
Lakeview MS - Flooring - Offices	**20**	**2020**	85	85		**85**	**LVT and carpet**
Lakeview MS - Flooring - Cafeteria	**20**	**2013**	50	50		**50**	**LVT**
Lakeview MS - Flooring - Kitchen	**50**	**1989**	32	32		**32**	**Terrazzo**
Lakeview MS - Flooring - Band	**20**	**2019**	80	80		**80**	**VCT**
Lakeview MS - Flooring - Choir	**20**	**2019**	80	80		**80**	**VCT**
Lakeview MS - Flooring - Orchestra	**15**	**2004**	-27	0		**-13**	**Carpet**
Lakeview MS - Plastic Laminate	**40**	**2007**	60	60		**60**	
Lakeview MS - Doors	**20**	**1989**	-70	0		**-35**	**Laminated white oak**
Lakeview MS - Door Hardware	**20**	**1989**	-70	0		**-35**	
Lakeview MS - Casework (Built-Ins)	**20**	**1989**	-70	0		**-35**	
Lakeview MS - Restrooms - Faculty	**20**	**2018**	75	75		**75**	
Lakeview MS - Restrooms - Student	**20**	**2018**	75	75		**75**	
Lakeview MS - Marquee	**15**	**2018**	67	67		**67**	**LED; Digital**
Lakeview MS - Paving - Parking - Concrete	**50**	**1989**	32	32		**32**	
Lakeview MS - Paving - Parking - Asphalt overlay	**20**	**2004**	5	5		**5**	
Lakeview MS - Paving - Sidewalks	**40**	**1989**	15	15		**15**	
Lakeview MS - Exterior Lighting	**20**	**2007**	20	20		**20**	**Parking LED bulbs only 2021**
Lakeview MS - Paint - Commons	**15**	**2016**	53	53		**53**	
Lakeview MS - Paint - Cafeteria	**15**	**2016**	53	53		**53**	
Lakeview MS - Paint - Gyms	**20**	**2016**	65	65		**65**	
Lakeview MS - Paint - Exterior	**20**	**2007**	20	20		**20**	**2017 All doors and rails new; exterior painted 2021; Front Entrance cleaned & painted 2022**
Lakeview MS - Paint - Hallways	**20**	**2018**	75	75		**75**	**2017 Bond**
Sports and Fine Arts							
Lakeview MS - Perf Arts - Curtains	**-**					**-**	
Lakeview MS - Perf Arts - Cafetorium Lighting	**25**	**1989**	-36	0		**-18**	
Lakeview MS - Asphalt Track	**20**	**2021**	90	80		**85**	**Needs repairs to one end due to soil**
Lakeview MS - Field Lights	**-**					**-**	
Lakeview MS - Bleachers - Exterior	**-**					**-**	
Lakeview MS - Bleachers - Interior	**30**	**1989**	-13	0		**-7**	**Wooden**
Lakeview MS - Gym Main - Flooring	**40**	**1989**	15	15		**15**	**2018 resurfaced and painted (2nd sanding)**
Lakeview MS - Gym Aux - Flooring	**40**	**1989**	15	15		**15**	**2019 resurfaced and painted (2nd sanding)**
Lakeview MS - Athletic Lockers	**40**	**1989**	15	15		**15**	**Painted 3-5 years ago**
Lakeview MS - Athletic Benches	**20**	**1989**	-70	0		**-35**	**Wood Bench**
Lakeview MS - Athletic Partitions	**20**	**2013**	50	50		**50**	**Tile walls and FRP doors**
WEIGHT ROOM 2008							
Lakeview MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Lakeview MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Lakeview MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber**

Lamar MS

Year Built / Age 1987 / 36

Campus Square Footage 139,927

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1987**	**28**				
Lamar MS - HVAC	**20**	**2009**	30	30	4%	**31**	**RTU**
Lamar MS - HVAC - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	
Lamar MS - HVAC - Controls	**20**	**2009**	30	30		**30**	**Controls = Alerton**
Lamar MS - Ceiling and Lights	**20**	**2009**	30	25		**28**	**T-5**
Lamar MS - Ceiling and Lights - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	
Lamar MS - Roof - Flat	**20**	**2001**	-10	5	-2%	**-3**	
Lamar MS - Roof - Flat - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	
Lamar MS - Electrical Switchgear	**30**	**2021**	93	93		**93**	
Lamar MS - Fire Safety - Fire Alarm	**20**	**2003**	0	5	10%	**3**	**Edwards EST 2 - Limited Parts**
Lamar MS - Fire Safety - ERRS	**-**					**-**	
Lamar MS - Fire Safety - Sprinkler System	**50**	**2009**	72	72	15%	**83**	
Lamar MS - Storm Shelter - 2022 Fine Arts Addition	**50**	**2022**					
Lamar MS - Food Service Boilers	**20**	**2018**	75	75		**75**	
Lamar MS - Food Service Freezers	**20**	**2009**	30	30		**30**	
Lamar MS - Generator	**40**	**2023**	100	100		**100**	**Generac - Diesel; 100 KW**
Lamar MS - Flooring - Classrooms	**15**	**2021**	87	87		**87**	
Lamar MS - Flooring - Corridors	**20**	**2011**	40	40		**40**	**VCT**
Lamar MS - Flooring - Library	**20**	**2014**	55	55		**55**	**VCT**
Lamar MS - Flooring - Offices	**15**	**2021**	87	87		**87**	**VCT and carpet**
Lamar MS - Flooring - Cafeteria	**20**	**2011**	40	40		**40**	**VCT**
Lamar MS - Flooring - Kitchen	**30**	**1987**	-20	0		**-10**	**Ceramic tile: 8x8, cmu painted walls**
Lamar MS - Flooring - Band	**20**	**2012**	45	45		**45**	**VCT**
Lamar MS - Flooring - Choir	**20**	**2012**	45	45		**45**	**VCT**
Lamar MS - Flooring - Orchestra	**20**	**2012**	45	45		**45**	**VCT**
Lamar MS - Flooring - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	**VCT**
Lamar MS - Plastic Laminate	**40**	**2009**	65	65		**65**	
Lamar MS - Doors	**20**	**1987**	-80	0		**-40**	**Medium**
Lamar MS - Door Hardware	**20**	**1987**	-80	0		**-40**	
Lamar MS - Casework (Built-Ins)	**20**	**1987**	-80	0		**-40**	
Lamar MS - Restrooms - Faculty	**20**	**2009**	30	30		**30**	
Lamar MS - Restrooms - Student	**20**	**2009**	30	30		**30**	**Floor tile: 2x2, cmu painted walls, solid plastic partitions, wall mounted urinals.**
Lamar MS - Marquee	**30**	**1987**	-20	0		**-10**	**Original on post**
Lamar MS - Paving - Parking - Concrete	**50**	**1987**	28	28		**28**	**Repairs have been made; front parking lot repairs 8/2021**
Lamar MS - Paving - Sidewalks	**40**	**1987**	10	15		**13**	**Spider cracking in front, right.**
Lamar MS - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
Lamar MS - Paint - Commons	**15**	**2021**	87	87		**87**	
Lamar MS - Paint - Cafeteria	**15**	**2020**	80	80		**80**	
Lamar MS - Paint - Gyms	**20**	**2020**	85	85		**85**	
Lamar MS - Paint - Exterior	**20**	**2001**	-10	5		**-3**	**Lower Walls; New exterior doors and rails 2016**
Lamar MS - Paint - Hallways	**20**	**2020**	85	85		**85**	**P-Lam 7'**
Sports and Fine Arts							
Lamar MS - Perf Arts - Curtains	**20**	**2016**	65	65		**65**	
Lamar MS - Perf Arts - Cafetorium Lighting	**25**	**2018**	80	80		**80**	
Lamar MS - Asphalt Track	**20**	**2007**	20	15		**18**	**Falling on sides; large cracks; 2019 major repairs to cracks & sealed the track & painted new lanes; needs some work**
Lamar MS - Field Lights	**-**					**-**	
Lamar MS - Bleachers - Exterior	**-**					**-**	
Lamar MS - Bleachers - Interior	**30**	**2008**	50	50		**50**	**Reverse Fold**
Lamar MS - Gym Main - Flooring	**40**	**1987**	10	10		**10**	**Refinish 2023**
Lamar MS - Gym Aux - Flooring	**40**	**1987**	10	10		**10**	**Refinish 2023**
Lamar MS - Athletic Lockers	**40**	**1987**	10	15		**13**	
Lamar MS - Athletic Benches	**20**	**1987**	-80	0		**-40**	**Painted wood**
Lamar MS - Athletic Partitions	**20**	**2009**	30	30		**30**	**Solid plastic**
WEIGHT ROOM 2008							
Lamar MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	**1 unit replaced Spring 2020**
Lamar MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Lamar MS - Weight Room Flooring	**20**	**2008**	25	25		**25**	**Rubber**

McKamy MS

Year Built / Age 1997 / 26

Campus Square Footage 128,675

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1997**	**48**				
McKamy MS - HVAC - Original	**20**	**2015**	60	55	5%	**60**	**RTU & VRF**
McKamy MS - HVAC - 2008 - Addition	**20**	**2008**	25	25	5%	**26**	**Weight Room; RTU**
McKamy MS - HVAC - Controls	**20**	**2015**	60	60		**60**	**Controls = Alerton**
McKamy MS - Ceiling and Lights - Original	**20**	**2015**	60	60		**60**	**LED**
McKamy MS - Ceiling and Lights - 2008 - Addition	**20**	**2008**	25	25		**25**	**T-5**
McKamy MS - Roof - Flat	**20**	**2015**	60	55	-8%	**53**	**Leak Warranty Repair**
McKamy MS - Roof - Standing Seam	**20**	**2015**	60	60	-8%	**55**	
McKamy MS - Roof - 2008 Addition	**20**	**2008**	25	25	-8%	**23**	
McKamy MS - Electrical Switchgear	**30**	**1997**	13	13	-29%	**9**	**Siemens**
McKamy MS - Elevator	**25**	**1997**	-4	5	-12%	**1**	**Schindler**
McKamy MS - Fire Safety - Fire Alarm	**20**	**2015**	60	60	-50%	**30**	**Edwards EST 3 - Voice activated**
McKamy MS - Fire Safety - ERRS	-					-	
McKamy MS - Fire Safety - Sprinkler System	**50**	**1997**	48	48	5%	**50**	
McKamy MS - Food Service Boilers	**20**	**2020**	85	85		**85**	**Tankless 2020**
McKamy MS - Food Service Freezers	**20**	**2015**	60	60		**60**	
McKamy MS - Generator	**40**	**2015**	80	80		**80**	**Cummins - Diesel; 200 KW**
McKamy MS - Lift Station	**20**	**2015**	60	60		**60**	**2,000 Gallon on Generator**
McKamy MS - Flooring - Classrooms	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Corridors	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Library	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Offices	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Cafeteria	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Kitchen	**50**	**1997**	48	35		**42**	**Terrazzo - cracked**
McKamy MS - Flooring - Band - Original	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Band - 2008	**15**	**2008**	0	5		**3**	**Carpet**
McKamy MS - Flooring - Choir	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Flooring - Orchestra	**20**	**2015**	60	60		**60**	**VCT**
McKamy MS - Plastic Laminate	**40**	**1997**	35	35		**35**	
McKamy MS - Doors	**20**	**2015**	60	60		**60**	**Dark**
McKamy MS - Door Hardware	**20**	**2015**	60	60		**60**	
McKamy MS - Casework (Built-Ins)	**20**	**2015**	60	60		**60**	**2015 Refresh replaced areas needing repair**
McKamy MS - Restrooms - Faculty	**20**	**2015**	60	60		**60**	
McKamy MS - Restrooms - Student	**20**	**2015**	60	60		**60**	
McKamy MS - Marquee	**30**	**1997**	13	20		**17**	**LED conversion 2021; new brick 2022**
McKamy MS - Paving - Parking Lots	**50**	**1997**	48	48		**48**	
McKamy MS - Paving - Sidewalks	**40**	**1997**	35	35		**35**	
McKamy MS - Exterior Lighting	**20**	**2015**	60	60		**60**	**LED**
McKamy MS - Paint - Commons	**15**	**2015**	47	47		**47**	**good/clean**
McKamy MS - Paint - Cafeteria	**15**	**2015**	47	47		**47**	**good/clean - maintaing lower walls**
McKamy MS - Paint - Gyms	**20**	**2015**	60	60		**60**	
McKamy MS - Paint - Exterior	**20**	**2015**	60	60		**60**	
McKamy MS - Paint - Hallways	**20**	**2015**	60	60		**60**	**good shape - continue to paint as needed.**
Sports and Fine Arts							
McKamy MS - Perf Arts - Curtains	-					-	
McKamy MS - Perf Arts - Cafetorium Lighting	**25**	**2017**	76	65		**71**	**No support; LED**
McKamy MS - Asphalt Track	**20**	**2021**	90	90		**90**	
McKamy MS - Field Lights	**30**	**2003**	33	33		**33**	**not used**
McKamy MS - Bleachers - Exterior	-					-	
McKamy MS - Bleachers - Interior	**30**	**1997**	13	13		**13**	**showing age; added aisles and railings 2019**
McKamy MS - Gym Main - Flooring	**40**	**1997**	35	35		**35**	**2nd sanding 2015**
McKamy MS - Gym Aux - Flooring	**40**	**1997**	35	35		**35**	**2nd sanding 2015**
McKamy MS - Athletic Lockers	**40**	**1997**	35	35		**35**	**2015 outside painted**
McKamy MS - Athletic Benches	**50**	**2015**	84	84		**84**	**Concrete**
McKamy MS - Athletic Partitions	**20**	**2015**	60	60		**60**	**CMU**
McKamy MS - Weight Room Floor	**20**	**2008**	25	25		**25**	**Rubber**

Shadow Ridge MS

Year Built / Age 2005 / 18

Campus Square Footage 153,664

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2005**	**64**				
Shadow Ridge MS - HVAC	**20**	**2005**	10	10	-26%	**7**	**CHILLER**
Shadow Ridge MS - HVAC - Controls	**20**	**2018**	75	75		**75**	**2008 Bond - Enviromatic**
Shadow Ridge MS - Ceiling and Lights	**20**	**2005**	10	10		**10**	**Main Hall LED 2017-18**
Shadow Ridge MS - Roof - Flat	**20**	**2005**	10	5	-10%	**7**	**Over kitchen**
Shadow Ridge MS - Roof - Metal	**30**	**2005**	40	5	-10%	**20**	**Leaks in gym**
Shadow Ridge MS - Electrical Switchgear	**30**	**2005**	40	40	-2%	**39**	**Cuttler Hammer**
Shadow Ridge MS - Elevator A (Main)	**25**	**2005**	28	28	3%	**29**	**Schindler**
Shadow Ridge MS - Lift (Press Box)	**-**					**-**	**Removed 7/2019**
Shadow Ridge MS - Fire Safety - Fire Alarm	**20**	**2005**	10	10	11%	**11**	**Edwards EST 2 - Limited Parts**
Shadow Ridge MS - Fire Safety - ERRS	**-**					**-**	
Shadow Ridge MS - Fire Safety - Sprinkler System	**50**	**2005**	64	64	14%	**73**	
Shadow Ridge MS - Food Service Boilers	**20**	**2005**	10	10		**10**	**Tank 2005; Anode Rod 2017**
Shadow Ridge MS - Food Service Freezers	**20**	**2005**	10	10		**10**	**Replaced floor 2018**
Shadow Ridge MS - Generator	**40**	**2005**	55	55		**55**	**Generac - Diesel; 80 KW**
Shadow Ridge MS - Flooring - Classrooms	**20**	**2005**	10	10		**10**	**VCT**
Shadow Ridge MS - Flooring - Corridors	**20**	**2005**	10	10		**10**	**VCT - floor cracking between Library & Gym**
Shadow Ridge MS - Flooring - Library	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Shadow Ridge MS - Flooring - Kitchen	**50**	**2005**	64	64		**64**	**Terrazzo - repaired 2017**
Shadow Ridge MS - Flooring - Band	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Flooring - Choir	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Flooring - Orchestra	**15**	**2021**	87	87		**87**	**Carpet**
Shadow Ridge MS - Plastic Laminate	**30**	**2005**	40	40		**40**	
Shadow Ridge MS - Doors	**20**	**2005**	10	10		**10**	**Light White Oak**
Shadow Ridge MS - Door Hardware	**20**	**2005**	10	10		**10**	
Shadow Ridge MS - Casework (Built-Ins)	**20**	**2005**	10	10		**10**	
Shadow Ridge MS - Restrooms - Faculty	**20**	**2005**	10	10		**10**	
Shadow Ridge MS - Restrooms - Student	**20**	**2005**	10	15		**13**	**CMU glazed solid doors**
Shadow Ridge MS - Marquee	**30**	**2005**	40	40		**40**	**LED conversion Summer 2021**
Shadow Ridge MS - Paving - Parking Lots	**50**	**2005**	64	45		**55**	**Spider cracks,**
Shadow Ridge MS - Paving - Sidewalks	**40**	**2005**	55	40		**48**	**Front & Back Brick pavers heaved; some repaired 2021 & 2022**
Shadow Ridge MS - Exterior Lighting	**20**	**2005**	10	10		**10**	**Front is LED (2015/16).**
Shadow Ridge MS - Paint - Commons	**15**	**2005**	-20	10		**-5**	**good/clean - maintaining as needed**
Shadow Ridge MS - Paint - Cafeteria	**15**	**2005**	-20	10		**-5**	**good/clean - maintaining as needed**
Shadow Ridge MS - Paint - Gyms	**20**	**2005**	10	10		**10**	**Door Frames need painting; back gym halls painted 2017; Gym lower walls painted 2018**
Shadow Ridge MS - Paint - Exterior	**20**	**2005**	10	10		**10**	**Lower walls 2014**
Shadow Ridge MS - Paint - Hallways	**20**	**2005**	10	10		**10**	**Back stairwells painted May 2017; Lower walls 2014**
Sports and Fine Arts							
Shadow Ridge MS - Perf Arts - Curtains	**20**	**2005**	10	10		**10**	
Shadow Ridge MS - Perf Arts - Cafetorium Lighting	**25**	**2005**	28	20		**24**	
Shadow Ridge MS - Asphalt Track	**20**	**2005**	10	10		**10**	**South end repaired w/concrete support, repaved and repainted 2021; bad soil causing movement**
Shadow Ridge MS - Field Lights	**30**	**2005**	40	40		**40**	
Shadow Ridge - Stadium Scoreboard	**18**	**2020**	83	83		**83**	**Replaced due to past storm damage**
Shadow Ridge - Lightning Detection		**2023**					**Tracking Only - Maintained by Athletics**
Shadow Ridge MS - Bleachers - Exterior	**40**	**2005**	55	55		**55**	
Shadow Ridge MS - Bleachers - Interior	**30**	**2005**	40	40		**40**	**Replaced some seats; castors replaced 2019**
Shadow Ridge MS - Gym Main - Flooring	**40**	**2005**	55	55		**55**	**2020 Sanded and refinished**
Shadow Ridge MS - Gym Aux - Flooring	**40**	**2005**	55	55		**55**	**2020 Sanded and refinished**
Shadow Ridge MS - Athletic Lockers	**40**	**2005**	55	55		**55**	
Shadow Ridge MS - Athletic Benches	**20**	**2005**	10	10		**10**	**Plastic/Wood Composite**
Shadow Ridge MS - Athletic Partitions	**20**	**2005**	10	10		**10**	**Ceramic Tile**
WEIGHT ROOM 2008							
Shadow Ridge MS - Weight Room HVAC	**20**	**2008**	25	25		**25**	
Shadow Ridge MS - Weight Room Roof - Metal	**30**	**2008**	50	50		**50**	
Shadow Ridge MS - Weight Room Flooring	**20**	**2008**	25	20		**23**	**Rubber**

ASSESSMENT SUMMARY

HIGH SCHOOLS

Current Year 2023

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
YEAR BUILT	2014	2010	2011	2005	2014	1999	1999	2012	1981	1986
Age	9	13	12	18	9	24	24	11	42	37
HVAC - Original	62	34	40	8	54	90	88	24	10	9
HVAC - Addition	-	-	-	-	-	2	2	24	-8	9
HVAC - Addition	-	-	-	-	-	27	26	43	22	9
HVAC - Addition	-	-	-	-	-	60	-	53	54	3
HVAC - Addition	-	-	-	-	-	-	-	-	-	5
HVAC - Fine Art Addition	-	-	-	-	-	100	95	95	-	95
HVAC - Controls	55	30	40	10	55	55	90	45	10	23
Roof - Flat - Original	41	39	46	5	100	90	90	-8	78	18
Roof - Shingled or Standing Seam	-	63	68	4	-	-	-	-	-	-
Roof - Addition	-	-	-	-	-	0	0	24	78	-8
Roof - Addition	-	-	-	-	-	28	30	43	78	-8
Roof - Addition	-	-	-	-	-	63	-	52	78	-4
Roof - Addition	-	-	-	-	-	-	-	-	78	0
Roof - Addition	-	-	-	-	-	-	-	-	78	13
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Addition	-	-	-	-	-	-	-	-	78	-
Roof - Fine Art Addition	-	-	-	-	-	100	95	95	-	95
Electrical Panels - Original	63	61	60	38	73	20	21	57	90	57
Electrical Panels - Additions	-	-	-	-	-	30	31	45	90	57
Electrical Panels - Additions	-	-	-	-	-	50	52	57	90	57
Electrical Panels - Additions	-	-	-	-	-	70	-	63	90	32
Electrical Panels - Additions	-	-	-	-	-	-	-	-	22	36
Electrical Panels - Additions	-	-	-	-	-	-	-	-	48	54
Electrical Panels - Additions	-	-	-	-	-	-	-	-	70	-
Electrical Panels - Fine Art Additions	-	-	-	-	-	100	97	97	-	95
Electrical Panels - Fine Art Additions	-	-	-	-	-	100	97	97	-	95
Elevator #1	31	49	62	26	31	100	100	59	56	100
Elevator #2	-	-	-	-	-	15	18	48	8	0
Elevator #3	-	-	-	-	-	71	-	8	60	-
Elevator #4	-	-	-	-	-	-	-	100	47	-
Elevator #5	-	-	-	-	-	-	-	57	-	-
Fire Safety - Fire Alarm	45	41	90	80	59	55	90	19	51	-5
Fire Safety - Sprinkler System	94	64	65	67	89	48	50	55	32	71
Fire Safety - Sprinkler System	-	-	-	-	-	54	55	73	54	-
Fire Safety - Sprinkler System	-	-	-	-	-	65	67	82	64	-
Fire Safety - Sprinkler System	-	-	-	-	-	82	-	86	70	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	82	-
Fire Safety - Sprinkler System - Fine Art Addition	-	-	-	-	-	100	98	98	-	98
Food Service Boilers	55	35	40	10	55	95	40	40	55	75
Food Service Freezers	55	35	40	10	55	90	90	45	25	25
Food Service Freezer - TCHS Cougar Cafe	-	-	-	-	-	-	-	-	-	30
Generator	78	78	70	55	78	98	95	73	-	60
Lift Station										
Flooring - Classrooms - Carpet	-	-	-	-	-	-	-	-	73	-
Flooring - Classrooms - LVT/VCT	55	35	40	10	55	90	90	45	80	85

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
Flooring - Classrooms - LVT/VCT	-	-	-	-	-	-	-	25	30	85
Flooring - Classrooms - LVT/VCT	-	-	-	-	-	-	-	-	-	85
Flooring - Classrooms - LVT/VCT	-	-	-	-	-	-	-	-	-	30
Flooring - Classrooms - LVT/VCT	-	-	-	-	-	-	-	-	-	-
Flooring - Corridors - Carpet	-	-	-	-	-	-	-	-	-	-
Flooring - Corridors - VCT	55	35	40	10	55	90	90	45	30	85
Flooring - Corridors - Stained Concrete	83	-	-	-	70	-	-	-	-	-
Flooring - Corridors - Terrazzo	82	-	-	-	-	-	-	-	-	-
Flooring - Library	83	13	20	87	70	90	85	45	23	13
Flooring - Offices	55	13	20	87	55	93	85	45	67	80
Flooring - Cafeteria	83	35	40	10	70	90	90	45	22	50
Flooring - Kitchen	82	74	76	64	82	52	52	78	22	26
Flooring - Band	-	13	20	87	-	75	25	45	45	30
Flooring - Choir	-	13	20	-	-	75	90	27	80	85
Flooring - Orchestra	-	13	20	-	-	75	90	45	45	0
Flooring - Fine Art Addition	-	-	-	-	-	100	95	95	-	95
Flooring - Fine Art Addition	-	-	-	-	-	100	95	95	-	95
Plastic Laminate	78	68	70	55	78	48	48	63	75	75
Doors	55	35	38	10	55	90	90	45	80	90
Door Hardware	55	35	40	10	55	90	90	45	80	90
Casework (Built Ins)	55	35	40	10	55	90	90	45	-55	90
Restrooms - Faculty	55	35	43	10	55	90	90	45	85	50
Restrooms - Student	55	38	43	10	55	90	90	48	45	55
Restrooms - Addition	-	-	-	-	-	90	90	3	80	50
Restrooms - Addition	-	-	-	-	-	23	25	25	-5	0
Restrooms - Addition	-	-	-	-	-	55	-	45	25	3
Restrooms - Addition	-	-	-	-	-	-	-	55	55	75
Marquee	40	60	60	93	40	70	80	40	83	53
Paving - Parking Lots	82	74	76	64	82	52	52	13	74	26
Paving - Parking Lots	-	-	-	-	-	80	72	42	80	40
Paving - Parking Lots	-	-	-	-	-	-	-	78	82	80
Paving - Sidewalks	-	-	-	-	-	-	-	-	15	-
Paving - Sidewalks	78	68	70	55	78	38	40	73	75	14
Exterior Lighting	55	90	40	10	55	50	85	45	70	80
Paint - Commons	43	13	20	73	67	87	87	28	73	33
Paint - Cafeteria	40	13	67	73	67	93	87	45	73	87
Paint - Auditorium	-	-	-	-	-	73	47	27	74	67
Paint - Activity Centers	-	-	-	-	-	43	-	27	40	-
Paint - Gyms	-	35	40	10	-	90	95	45	3	-5
Paint - Exterior	55	35	40	10	55	95	95	45	55	35
Paint - Hallways	55	35	40	10	55	95	95	43	45	55
9th /10th SPORTS & FINE ARTS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Cafetorium - Curtains	55	35	40	10	55	85	90	45	-	-
Cafetorium - Lighting	55	35	40	10	55	92	92	56	-	-
Track	-	-	-10	10	-	-	-	-	-	-
Field Lights	-	-	60	-	-	-	-	-	-	-
Bleachers - Exterior	-	-	90	-	-	-	-	-	-	-
Bleachers - Interior	-	57	60	40	-	-	-	-	-	-
HS SPORTS & FINE ARTS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Auditorium Curtains	-	-	-	-	-	95	70	55	75	75
Auditorium Stage Lighting	-	-	-	-	-	13	3	60	80	80
Auditorium Sound	-	-	-	-	-	-	-	-	-	-
Auditorium Seating	-	-	-	-	-	0	3	55	75	75
Auditorium Flooring	-	-	-	-	-	73	40	25	67	67

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
Large Gym - Flooring	-	68	70	55	-	93	40	73	63	50
Large Gym - Bleachers	-	57	60	40	-	20	20	63	53	33
Large Gym - Scoreboard	-	-	-	-	-	50	-8	45	25	-
Middle/Aux Gym - Flooring	-	68	70	55	-	73	40	73	35	10
Middle/Aux Gym - Bleachers	-	-	-	-	-	20	20	-	13	-10
Middle/Aux Gym - Scoreboard	-	-	-	-	-	-10	-8	-	65	-
Other Gym - Flooring	-	-	-	-	-	25	20	-	3	8
Other Gym - Bleachers	-	-	-	-	-	50	50	-	-18	-
Girls Locker Rooms - Flooring	-	35	40	13	-	45	25	45	25	45
Girls Locker Rooms - Benches	-	74	76	13	-	45	60	78	70	50
Girls Locker Rooms - Partitions	-	35	40	10	-	40	25	45	25	45
Boys Locker Rooms - Flooring	-	35	40	13	-	75	90	45	25	45
Boys Locker Rooms - Benches	-	74	76	13	-	90	60	78	70	50
Boys Locker Rooms - Partitions	-	35	40	10	-	90	90	45	25	45
STADIUMS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Bleachers	-	-	-	-	-	50	48	16	68	14
Artificial Turf	-	-	-	-	-	75	75	63	38	75
Synthetic Track	-	-	-	-	-	-5	5	3	50	3
PA System	-	-	-	-	-	-	-	-	-	-
Light poles	-	-	-	-	-	33	70	53	57	57
Scoreboard	-	-	-	-	-	-6	-3	-3	28	-3
Pressbox HVAC	-	-	-	-	-	3	3	90	35	0
Pressbox Roof	-	-	-	-	-	5	3	93	35	0
Pressbox Flooring	-	-	-	-	-	5	80	87	13	0
Ticket Booths	-	-	-	-	-	-	3	90	35	0
Ticket or Restroom / Concession - Home - HVAC	-	-	-	-	-	5	30	90	-	0
Ticket or Restroom / Concession - Home - Roof	-	-	-	-	-	33	3	90	40	0
Ticket or Restroom / Concession - Visitor - HVAC	-	-	-	-	-	-	-	-	-	80
Ticket or Restroom / Concession - Visitor - Roof	-	-	-	-	-	33	3	90	40	80
Restrooms - Home	-	-	-	-	-	5	-	90	35	5
Restrooms - Visitor	-	-	-	-	-	5	3	90	35	5
Restrooms - North End	-	-	-	-	-	-	-	-	-	0
Athletic Warehouse	-	-	-	-	-	-	-	-	-	-
Band Tower	-	-	-	-	-	100		100	100	100
FIELD HOUSES	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	35	35	35	35	35
Roof - Metal	-	-	-	-	-	57	57	57	57	57
Electrical Panels	-	-	-	-	-	57	57	57	57	57
Fire Safety - Alarm System	-	-	-	-	-	38	35	35	35	35
Fire Safety - Sprinkler System	-	-	-	-	-	74	74	74	74	74
Flooring - Carpet	-	-	-	-	-	12	13	13	13	13
Flooring - Epoxy	-	-	-	-	-	35	35	35	35	35
Flooring - Concrete/Terrazzo	-	-	-	-	-	74	74	74	74	74
Restrooms - Locker room	-	-	-	-	-	35	33	38	33	35
Restrooms - Coaches	-	-	-	-	-	35	35	35	35	35
Lockers	-	-	-	-	-	68	64	68	64	68
Benches	-	-	-	-	-	74	74	74	74	74
Paint	-	-	-	-	-	73	14	60	70	60
Exterior Lighting	-	-	-	-	-	35	35	35	35	35
Activity Centers / OLD FIELD HOUSES	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Fire Safety - Alarm System	-	-	-	-	-	55	90	19	51	-
Activity Centers - HVAC	-	-	-	-	-	55	90	43	54	-
Activity Centers - Roof - Flat	-	-	-	-	-	55	90	43	78	-

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
Activity Centers - Electrical Panels	-	-	-	-	-	70	93	57	70	-
Activity Centers - Fire Safety - Sprinkler System	-	-	-	-	-	82	96	82	82	-
Activity Centers - Flooring	-	-	-	-	-	78	95	73	78	-
Activity Centers - Bleachers	-	-	-	-	-	70	93	63	70	-
Activity Centers - Restrooms	-	-	-	-	-	55	90	45	55	-
Activity Centers - Scoreboard	-	-	-	-	-	55	90	45	55	-
Activity Centers - Locker Room Flooring	-	-	-	-	-	55	90	45	55	-
Activity Centers - Locker Room Benches	-	-	-	-	-	82	96	78	82	-
Activity Centers - Locker Room Lockers	-	-	-	-	-	78	95	73	78	-
Field House -HVAC	-	-	-	-	-	90	5	90	-	-
Field House - Roof - Flat	-	-	-	-	-	90	5	90	-	-
Field House - Roof - Flat	-	-	-	-	-	-	-	93	-	-
Field House - Roof - Metal	-	-	-	-	-	-	-	-	-	-
Field House - Electrical Panels	-	-	-	-	-	20	33	93	-	-
Field House - Alarm System	-	-	-	-	-		5	90	-	-
Field House - Fire Safety - Sprinkler System	-	-	-	-	-	52	60	96	-	-
Field House - Flooring - Carpet	-	-	-	-	-	-	-12	87	-	-
Field House - Flooring - Concrete/Terrazzo	-	-	-	-	-	75	5	-	-	-
Field House - Flooring - Epoxy	-	-	-	-	-	-	-	90	-	-
Field House - Flooring - Epoxy	-	-	-	-	-	-	-	90	-	-
Field House - Locker Room Flooring	-	-	-	-	-	75	3	-	-	-
Field House - Locker Room Benches	-	-	-	-	-	75	48	96	-	-
Field House - Locker Room Lockers	-	-	-	-	-	38	93	90	-	-
Paint	-	-	-	-	-	-	53	90	-	-
Paint - Exterior	-	-	-	-	-	90	5	90	-	-
INDOOR ATHLETIC CENTERS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	45	5	-13	45	75
Roof - Metal	-	-	-	-	-	67	5	10	67	8
Electrical Panels	-	-	-	-	-	67	33	10	67	7
Fire Safety - Alarm System	-	-	-	-	-	50	5	-	50	-
Fire Safety - Sprinkler System	-	-	-	-	-	80	60	-	80	-
Artificial Turf	-	-	-	-	-	27	-12	5	29	13
Flooring - Carpet	-	-	-	-	-	-	5	-	-	-
Flooring - Concrete/Terrazzo	-	-	-	-	-	-	-	-	-	-
Locker Room Flooring	-	-	-	-	-	-	3	-	-	75
Locker Room Benches	-	-	-	-	-	-	48	-	-	-
Locker Room Lockers	-	-	-	-	-	-	93	-	-	88
Weight room flooring	-	-	-	-	-	100	100	50	100	-
Paint	-	-	-	-	-	50	53	60	80	70
Paint - Exterior	-	-	-	-	-	50	5	90	50	-15
SPORTS COMPLEXES	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Parking Lots	-	-	-	-	-	82	-	-	78	-
BASEBALL FIELDS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Bleachers	-	-	-	-	-	78	40	50	65	20
Backstop Netting	-	-	-	-	-	40	73	9	8	13
Scoreboard	-	-	-	-	-	55	65	10	30	60
Pressbox	-	-	-	-	-	55	5	90	20	-13
Paint - Dugout	-	-	-	-	-	40	100	60	7	60
Light poles	-	-	-	-	-	70	18	2	53	-1
Field Leveling	-	-	-	-	-	50	75	75	50	75
Batting Cage	-	-	-	-	-	55	45	45	30	45
Concession	-	-	-	-	-	-	15	0	-	-10

	FLOWER MOUND 9TH	HEBRON 9TH	LHS HARMON 9/10	LHS KILLOUGH 9/10	MARCUS 9TH	FLOWER MOUND HS	HEBRON HS	LEWISVILLE HS	MARCUS HS	THE COLONY HS
Restrooms / Concession	-	-	-	-	-	-	-	-	-	-
HVAC	-	-	-	-	-	55	-	-	30	-
Roof - Metal	-	-	-	-	-	70	-	-	53	-
Flooring	-	-	-	-	-	55	-	-	18	-
Lockers	-	-	-	-	-	-	-	-	30	-
SOFTBALL FIELDS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Bleachers	-	-	-	55	-	78	30	-	73	90
Restrooms	-	-	-	10	-	-	-	-	-	80
Backstop Netting	-	-	-	13	-	40	13	-	27	73
Scoreboard	-	-	-	75	-	55	65	-	45	60
Pressbox	-	-	-	10	-	55	3	-	45	80
Paint - Dugout	-	-	-	80	-	40	100	-	23	80
Light poles	-	-	-	40	-	70	20	-	63	87
Turf	-	-	-	-	-	-	-	-	-	50
Field Leveling	-	-	-	0	-	25	25	-	50	-
Batting Cage	-	-	-	45	-	55	45	-	45	80
Concession	-	-	-	10	-	-	-	-	45	80
TENNIS COURTS	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
Courts	-	-	76	-		82	90		78	
Resurfaced	-	-	60	-		10	90		-5	
Light Poles	-	-	60	-	-	70	87	-	63	-
Shade Structure	-	-	50	-	-	55	80	-	45	50
Northwest Courts	-	-	-	-	-	-	-	-	-	26
Northwest Courts Resurfaced	-	-	-	-	-	-	-	-	-	0
Northwest Courts Light Poles	-	-	-	-	-	-	-	-	-	53
Southwest Courts	-	-	-	-	-	-	-	-	-	42
Southwest Courts Resurfaced	-	-	-	-	-	-	-	-	-	0
WEIGHT ROOM	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	-	-	0	-	75
Roof - Metal	-	-	-	-	-	-	-	33	-	33
Electrical Panels	-	-	-	-	-	-	-	33	-	33
Fire Safety - Alarm System	-	-	-	-	-	-	-	-	-	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	-	-	-
Flooring	-	-	-	-	-	-	-	90	-	100
Paint	-	-	-	-	-	-	-	87	-	75
GIRLS WRESTLING LOCKER/WEIGHT ROOM	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	-	-	90	-	-
Roof - Metal	-	-	-	-	-	-	-	93	-	-
Electrical Panels	-	-	-	-	-	-	-	93	-	-
Fire Safety - Alarm System	-	-	-	-	-	-	-	90	-	-
Fire Safety - Sprinkler System	-	-	-	-	-	-	-	96	-	-
Flooring - Epoxy	-	-	-	-	-	-	-	90	-	-
Restroom	-	-	-	-	-	-	-	90	-	-
Lockers	-	-	-	-	-	-	-	95	-	-
Benches	-	-	-	-	-	-	-	96	-	-
Paint	-	-	-	-	-	-	-	90	-	-
AGRICULTURE SHOP	FMHS-9	HHS-9	LHS-H	LHS-K	MHS-9	FMHS	HHS	LHS	MHS	TCHS
HVAC	-	-	-	-	-	-	-	-	20	-
Roof - Metal	-	-	-	-	-	-	-	-	85	-
Flooring - VCT	-	-	-	-	-	-	-	-	60	-

Flower Mound 9th

Year Built / Age 2014 / 9

Campus Square Footage 115,261

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2014**	**82**				
Flower Mound 9th - HVAC	**20**	**2014**	55	55	13%	**62**	**RTU**
Flower Mound 9th - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Flower Mound 9th - Ceiling and Lights	**20**	**2014**	55	55		**55**	**LED & T8**
Flower Mound 9th - Roof - Flat	**20**	**2014**	55	50	-22%	**41**	**Mod Bit**
Flower Mound 9th - Electrical Switchgear	**30**	**2014**	70	70	-10%	**63**	
Flower Mound 9th - Elevator	**25**	**2014**	64	60	-50%	**31**	**Thyssen Krupp**
Flower Mound 9th - Fire Safety - Fire Alarm	**20**	**2014**	55	55	-18%	**45**	**Edwards EST 3**
Flower Mound 9th - Fire Safety - ERRS		**2021**				**-**	**Tracking only**
Flower Mound 9th - Fire Safety - Sprinkler System	**50**	**2014**	82	82	14%	**94**	
Flower Mound 9th - Food Service Boilers	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Food Service Freezers	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Generator	**40**	**2014**	78	78		**78**	**Cummins - Diesel; 200 KW**
Flower Mound 9th - Flooring - Classrooms - VCT	**20**	**2014**	55	55		**55**	**VCT**
Flower Mound 9th - Flooring - Corridors - VCT	**20**	**2014**	55	55		**55**	**VCT**
Flower Mound 9th - Flooring - Corridors - Stained Concrete	**30**	**2018**	83	83		**83**	**Stained concrete**
Flower Mound 9th - Flooring - Library	**30**	**2018**	83	83		**83**	**Stained concrete**
Flower Mound 9th - Flooring - Offices	**20**	**2014**	55	55		**55**	**VCT**
Flower Mound 9th - Flooring - Cafeteria	**30**	**2018**	83	83		**83**	**Stained concrete**
Flower Mound 9th - Flooring - Connection Corridor	**50**	**2014**	82	82		**82**	**Terrazzo some cracking**
Flower Mound 9th - Flooring - Kitchen	**50**	**2014**	82	82		**82**	**Terrazzo**
Flower Mound 9th - Plastic Laminate	**40**	**2014**	78	78		**78**	
Flower Mound 9th - Doors	**20**	**2014**	55	55		**55**	**Dark**
Flower Mound 9th - Door Hardware	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Casework (Built-Ins)	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Restrooms - Faculty	**20**	**2014**	55	55		**55**	**Ceramic tile**
Flower Mound 9th - Restrooms - Student	**20**	**2014**	55	55		**55**	**Ceramic tile**
Flower Mound 9th - Marquee	**15**	**2014**	40	40		**40**	**LED; Digital**
Flower Mound 9th - Paving - Parking Lots	**50**	**2014**	82	82		**82**	
Flower Mound 9th - Paving - Sidewalks	**40**	**2014**	78	78		**78**	**Shotblast Front porch 2018**
Flower Mound 9th - Exterior Lighting	**20**	**2014**	55	55		**55**	**LED**
Flower Mound 9th - Paint - Commons	**15**	**2014**	40	45		**43**	**Office areas repainted 2018 - color changes**
Flower Mound 9th - Paint - Cafeteria	**15**	**2014**	40	40		**40**	
Flower Mound 9th - Paint - Exterior	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Paint - Hallways	**20**	**2014**	55	55		**55**	
Sports and Fine Arts							
Flower Mound 9th - Cafetorium - Curtains	**20**	**2014**	55	55		**55**	
Flower Mound 9th - Cafetorium - Lighting	**20**	**2014**	55	55		**55**	**LED**

Hebron 9th

Year Built / Age 2010 / 13

Campus Square Footage 179,248

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2010**	**74**				
Hebron 9th - HVAC	**20**	**2010**	35	30	3%	**34**	**CHILLER**
Hebron 9th - HVAC - Controls	**20**	**2010**	35	25		**30**	**Controls = Alerton (control)/Automated Logic (hardware)**
Hebron 9th - Ceiling and Lights	**20**	**2010**	35	35		**35**	**T5**
Hebron 9th - Roof - Flat	**20**	**2010**	35	35	11%	**39**	**4 Ply Built Up**
Hebron 9th - Roof - Standing Seam	**30**	**2010**	57	57	11%	**63**	
Hebron 9th - Electrical Switchgear	**30**	**2010**	57	57	7%	**61**	
Hebron 9th - Elevator	**25**	**2010**	48	40	12%	**49**	**Thyssen Krupp**
Hebron 9th - Fire Safety - Fire Alarm	**20**	**2010**	35	35	16%	**41**	**FCI Gamewell E3 Series**
Hebron 9th - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Hebron 9th - Fire Safety - Sprinkler System	**50**	**2010**	74	74	-13%	**64**	
Hebron 9th - Food Service Boilers	**20**	**2010**	35	35		**35**	
Hebron 9th - Food Service Freezers	**20**	**2010**	35	35		**35**	
Hebron 9th - Generator	**40**	**2014**	78	78		**78**	**Kohler - Diesel; 275 KW**
Hebron 9th - Flooring - Classrooms	**20**	**2010**	35	35		**35**	**VCT**
Hebron 9th - Flooring - Corridors	**20**	**2010**	35	35		**35**	**VCT**
Hebron 9th - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet & LVT**
Hebron 9th - Flooring - Offices	**15**	**2010**	13	13		**13**	**Carpet**
Hebron 9th - Flooring - Cafeteria	**20**	**2010**	35	35		**35**	**VCT**
Hebron 9th - Flooring - Kitchen	**50**	**2010**	74	74		**74**	**Terrazzo**
Hebron 9th - Flooring - Band	**15**	**2010**	13	13		**13**	**Carpet**
Hebron 9th - Flooring - Choir	**15**	**2010**	13	13		**13**	**Carpet**
Hebron 9th - Flooring - Orchestra	**15**	**2010**	13	13		**13**	**Carpet**
Hebron 9th - Plastic Laminate	**40**	**2010**	68	68		**68**	
Hebron 9th - Doors	**20**	**2010**	35	35		**35**	**Medium Dark**
Hebron 9th - Door Hardware	**20**	**2010**	35	35		**35**	
Hebron 9th - Casework (Built-Ins)	**20**	**2010**	35	35		**35**	
Hebron 9th - Restrooms - Faculty	**20**	**2010**	35	35		**35**	
Hebron 9th - Restrooms - Student	**20**	**2010**	35	40		**38**	**CT to ceiling. Block Part. w/solid wood doors**
Hebron 9th - Marquee	**15**	**2017**	60	60		**60**	**2017 Change to LED; Digital**
Hebron 9th - Paving - Parking Lots	**50**	**2010**	74	74		**74**	
Hebron 9th - Paving - Sidewalks	**40**	**2010**	68	68		**68**	
Hebron 9th - Exterior Lighting	**20**	**2021**	90	90		**90**	**Pole Lights LED 2021**
Hebron 9th - Paint - Commons	**15**	**2010**	13	13		**13**	
Hebron 9th - Paint - Cafeteria	**15**	**2010**	13	13		**13**	
Hebron 9th - Paint - Gyms	**20**	**2010**	35	35		**35**	
Hebron 9th - Paint - Exterior	**20**	**2010**	35	35		**35**	
Hebron 9th - Paint - Hallways	**20**	**2010**	35	35		**35**	**Maintain Traffic Areas**
Sports and Fine Arts							
Hebron 9th - Perf Arts - Curtains	**20**	**2010**	35	35		**35**	
Hebron 9th - Perf Arts - Cafetorium Lighting	**20**	**2010**	35	35		**35**	
Hebron 9th - Track	**-**					**-**	
Hebron 9th - Field Lights	**-**					**-**	
Hebron 9th - Bleachers - Exterior	**-**					**-**	
Hebron 9th - Bleachers - Interior	**30**	**2010**	57	57		**57**	
Hebron 9th - Gym Main - Flooring	**40**	**2010**	68	68		**68**	**Sanded & Refinished 2021**
Hebron 9th - Gym Auxiliary - Flooring	**40**	**2010**	68	68		**68**	**Sanded & Refinished 2022**
Hebron 9th - Gym -Locker Room - Flooring	**20**	**2010**	35	35		**35**	**Epoxy**
Hebron 9th - Gym - Lockers	**40**	**2010**	68	68		**68**	
Hebron 9th - Gym - Benches	**50**	**2010**	74	74		**74**	**Concrete**
Hebron 9th - Gym - Partitions	**20**	**2010**	35	35		**35**	**Block**

LHS Harmon

Year Built / Age 2011 / 12

Campus Square Footage 212,748

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2011**	**76**				
LHS Harmon - HVAC	**20**	**2011**	40	40	-1%	**40**	**CHILLER; hot water coil in cafeteria unit replaced 2021**
LHS Harmon - HVAC - Controls	**20**	**2011**	40	40		**40**	**Controls = Alerton**
LHS Harmon - Ceiling and Lights	**20**	**2011**	40	40		**40**	
LHS Harmon - Roof - Flat	**20**	**2011**	40	40	14%	**46**	**4 Ply Built up**
LHS Harmon - Roof - Standing Seam	**30**	**2011**	60	60	14%	**68**	
LHS Harmon - Electrical Switchgear	**30**	**2011**	60	60	0%	**60**	
LHS Harmon - Elevator	**25**	**2011**	52	52	20%	**62**	**Otis**
LHS Harmon - Fire Safety - Fire Alarm	**20**	**2021**	90	90		**90**	**Edwards EST 3; some older components need replacement**
LHS Harmon - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
LHS Harmon - Fire Safety - Sprinkler System	**50**	**2011**	76	76	-15%	**65**	
LHS Harmon - Food Service Boilers	**20**	**2011**	40	40		**40**	
LHS Harmon - Food Service Freezers	**20**	**2011**	40	40		**40**	
LHS Harmon - Generator	**40**	**2011**	70	70		**70**	**Generac - Diesel; 600 KW; new water pump 2021**
LHS Harmon - Flooring - Classrooms	**20**	**2011**	40	40		**40**	**VCT**
LHS Harmon - Flooring - Corridors	**20**	**2011**	40	40		**40**	**VCT**
LHS Harmon - Flooring - Library	**15**	**2011**	20	20		**20**	**Carpet**
LHS Harmon - Flooring - Offices	**15**	**2011**	20	20		**20**	**Carpet; Principal & Secretary areas replaced 2023**
LHS Harmon - Flooring - Cafeteria	**20**	**2011**	40	40		**40**	**VCT**
LHS Harmon - Flooring - Kitchen	**50**	**2011**	76	76		**76**	**Terrazzo**
LHS Harmon - Flooring - Band	**15**	**2011**	20	20		**20**	**Carpet**
LHS Harmon - Flooring - Choir	**15**	**2011**	20	20		**20**	**Carpet**
LHS Harmon - Flooring - Orchestra	**15**	**2011**	20	20		**20**	**Carpet**
LHS Harmon - Plastic Laminate	**40**	**2011**	70	70		**70**	
LHS Harmon - Doors	**20**	**2011**	40	35		**38**	**White Oak**
LHS Harmon - Door Hardware	**20**	**2011**	40	40		**40**	**Medeco**
LHS Harmon - Casework (Built-Ins)	**20**	**2011**	40	40		**40**	
LHS Harmon - Restrooms - Faculty	**20**	**2011**	40	45		**43**	**CMU Walls**
LHS Harmon - Restrooms - Student	**20**	**2011**	40	45		**43**	**CMU Walls**
LHS Harmon - Marquee	**30**	**2011**	60	60		**60**	
LHS Harmon - Paving - Parking Lots	**50**	**2011**	76	76		**76**	**Concrete**
LHS Harmon - Paving - Sidewalks	**40**	**2011**	70	70		**70**	
LHS Harmon - Exterior Lighting	**20**	**2011**	40	40		**40**	
LHS Harmon - Paint - Commons	**15**	**2011**	20	20		**20**	
LHS Harmon - Paint - Cafeteria	**15**	**2018**	67	67		**67**	
LHS Harmon - Paint - Gyms	**20**	**2011**	40	40		**40**	**Lower Walls**
LHS Harmon - Paint - Exterior	**20**	**2011**	40	40		**40**	**Metal Doors**
LHS Harmon - Paint - Hallways	**20**	**2011**	40	40		**40**	**Athletic areas painted 2015**
Sports and Fine Arts							
LHS Harmon - Perf Arts - Curtains	**20**	**2011**	40	40		**40**	
LHS Harmon - Perf Arts - Cafetorium Lighting	**20**	**2011**	40	40		**40**	
LHS Harmon - Synthetic Track	**10**	**2011**	-20	0		**-10**	**Fair; some damage; long jump run in very poor condition; repaired a few places when bleachers were added; repairs to surface**
LHS Harmon - Field Lights	**30**	**2011**	60	60		**60**	
LHS Harmon - Stadium Scoreboard	**18**	**2015**	56	56		**56**	**Moved from Purnell**
LHS Harmon - Lightning Detection		**2023**					**Tracking Only - Maintained by Athletics**
LHS Harmon - Bleachers - Exterior	**40**	**2019**	90	90		**90**	
LHS Harmon - Bleachers - Interior	**30**	**2011**	60	60		**60**	
LHS Harmon - Gym Main - Flooring	**40**	**2011**	70	70		**70**	
LHS Harmon - Gym Auxiliary - Flooring	**40**	**2011**	70	70		**70**	
LHS Harmon - Gym - Locker Room - Flooring	**20**	**2011**	40	40		**40**	**Epoxy**
LHS Harmon - Gym - Lockers	**40**	**2011**	70	70		**70**	
LHS Harmon - Gym - Benches	**50**	**2011**	76	76		**76**	**Concrete**
LHS Harmon - Gym - Partitions	**20**	**2011**	40	40		**40**	**CMU**
TENNIS COURTS 2011							
LHS Harmon - Tennis Courts	**50**	**2011**	76	76		**76**	**12 Courts; replaced gate & most latches; slats added 2020**
LHS Harmon - Tennis Courts Resurfaced	**10**	**2019**	60	60		**60**	**Adding additional slats to interior fencing 2022**
LHS Harmon - Tennis Courts Light Poles	**30**	**2011**	60	60		**60**	
LHS Harmon - Tennis Courts Shade Structure	**20**	**2013**	50	50		**50**	

LHS Killough

Year Built / Age 2005 / 18

Campus Square Footage 175,658

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2005**	**64**				
LHS Killough - HVAC	**20**	**2005**	10	10	-19%	**8**	**CHILLER - Boilers replaced 2021; 3 heaters in boiler rm on Generator 2021**
LHS Killough - HVAC - Control	**20**	**2005**	10	10		**10**	**Controls = Alerton**
LHS Killough - Ceiling and Lights	**20**	**2005**	10	10		**10**	**T-8**
LHS Killough - Roof - Flat	**20**	**2005**	10	10	-48%	**5**	**4 Ply Built up**
LHS Killough - Roof - Shingled	**20**	**2005**	10	5	-48%	**4**	
LHS Killough - Electrical Switchgear	**30**	**2005**	40	40	-4%	**38**	
LHS Killough - Elevator (Main Campus)	**25**	**2005**	28	20	9%	**26**	**Thyssen Krupp**
LHS Killough - Lift (Softball Press Box)	**-**					**-**	**Removed 7/2019**
LHS Killough - Fire Safety - Fire Alarm	**20**	**2019**	80	80		**80**	**Edwards IO**
LHS Killough - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
LHS Killough - Fire Safety - Sprinkler System	**50**	**2005**	64	64	4%	**67**	
LHS Killough - Food Service Boilers	**20**	**2005**	10	10		**10**	
LHS Killough - Food Service Freezers	**20**	**2005**	10	10		**10**	
LHS Killough - Generator	**40**	**2005**	55	55		**55**	**Olympian - Diesel; 150 KW**
LHS Killough - Flooring - Classrooms	**20**	**2005**	10	10		**10**	**VCT**
LHS Killough - Flooring - Corridors	**20**	**2005**	10	10		**10**	**VCT**
LHS Killough - Flooring - Library	**15**	**2021**	87	87		**87**	**Carpet**
LHS Killough - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet**
LHS Killough - Flooring - Cafeteria	**20**	**2005**	10	10		**10**	**VCT**
LHS Killough - Flooring - Kitchen	**50**	**2005**	64	64		**64**	**Terrazzo**
LHS Killough - Flooring - Band	**15**	**2021**	87	87		**87**	**Carpet**
LHS Killough - Plastic Laminate	**40**	**2005**	55	55		**55**	
LHS Killough - Doors	**20**	**2005**	10	10		**10**	**Golden Oak**
LHS Killough - Door Hardware	**20**	**2005**	10	10		**10**	**Best**
LHS Killough - Casework (Built-Ins)	**20**	**2005**	10	10		**10**	
LHS Killough - Restrooms - Faculty	**20**	**2005**	10	10		**10**	
LHS Killough - Restrooms - Student	**20**	**2005**	10	10		**10**	**Solid Plastic**
LHS Killough - Marquee	**15**	**2022**	93	93		**93**	**Digital**
LHS Killough - Paving - Parking Lots	**50**	**2005**	64	64		**64**	**Concrete**
LHS Killough - Paving - Sidewalks	**40**	**2005**	55	55		**55**	
LHS Killough - Exterior Lighting	**20**	**2005**	10	10		**10**	**Partial LED (3 Poles)**
LHS Killough - Paint - Commons	**15**	**2019**	73	73		**73**	
LHS Killough - Paint - Cafeteria	**15**	**2019**	73	73		**73**	
LHS Killough - Paint - Gyms	**20**	**2005**	10	10		**10**	**Lower walls painted 2018**
LHS Killough - Paint - Exterior	**20**	**2005**	10	10		**10**	
LHS Killough - Paint - Hallways	**20**	**2005**	10	10		**10**	**Frames/Base painted 2018; walls maintained 2021**
Sports and Fine Arts							
LHS Killough - Perf Arts - Curtains	**20**	**2005**	10	10		**10**	
LHS Killough - Perf Arts - Cafetorium Lighting	**20**	**2005**	10	10		**10**	
LHS Killough - Asphalt Track	**20**	**2005**	10	10		**10**	**2020 removed rubberized surface, sealed & repainted lines**
LHS Killough - Bleachers - Interior	**30**	**2005**	40	40		**40**	
LHS Killough - Gym Main - Flooring	**40**	**2005**	55	55		**55**	**Sanded and Refinished 2021**
LHS Killough - Gym Auxiliary - Flooring	**40**	**2005**	55	55		**55**	**Sanded and Refinished 2021**
LHS Killough - Gym - Locker Room - Flooring	**20**	**2005**	10	15		**13**	**Epoxy; refinished 2021**
LHS Killough - Gym - Lockers	**40**	**2005**	55	55		**55**	
LHS Killough - Gym - Benches	**20**	**2005**	10	15		**13**	**Plastic, wood**
LHS Killough - Gym - Partitions	**20**	**2005**	10	10		**10**	**Solid Plastic**
SOFTBALL FIELD 2005							

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
LHS Killough - Softball Field Bleachers	40	2005	55	55		55	
LHS Killough - Softball Field Restrooms	20	2005	10	10		10	2x2 flt CT; 4x4 wall tile to ceiling; solid plastic partitions
LHS Killough - Softball Field Backstop Netting	15	2010	13	13		13	Repaired netting in 2020, 2021 & 2022; starting to show wear at bottom
LHS Killough - Softball Field Scoreboard	20	2018	75	75		75	
LHS Killough - Softball Field Pressbox	20	2005	10	10		10	
LHS Killough - Softball Field Paint - Dugout	15	2020	80	80		80	
LHS Killough - Softball Field Light poles	30	2005	40	40		40	
LHS Killough - Softball Field Leveling	4	2019	0	0		0	2023/24 renovation scheduled; edges need to be removed and resodded
LHS Killough - Softball Field Bullpens	20	2016	65	65		65	1st and 3rd added 2016
LHS Killough - Softball Field Batting Cage	20	2012	45	45		45	will need new netting in covered cages
LHS Killough - Softball Field Concession	20	2005	10	10		10	
LHS Killough - Lightning Detection		2023					Tracking Only - Maintained by Athletics

Marcus 9TH

Year Built / Age 2014 / 9

Campus Square Footage 109,046

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2014**	**82**				
Marcus 9th - HVAC	**20**	**2014**	55	55	-2%	**54**	**RTU**
Marcus 9th - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Marcus 9th - Ceiling and Lights	**20**	**2014**	55	55		**55**	**Mixed**
Marcus 9th - Roof - Flat	**20**	**2021**	90	90	11%	**100**	**2017 hail damage insurance replacement**
Marcus 9th - Electrical Switchgear	**30**	**2014**	70	70	4%	**73**	**Square D**
Marcus 9th - Elevator	**25**	**2014**	64	60	-50%	**31**	**Thyssen Krupp**
Marcus 9th - Fire Safety - Fire Alarm	**20**	**2014**	55	55	8%	**59**	**Notifier NFS2-3030E**
Marcus 9th - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Marcus 9th - Fire Safety - Sprinkler System	**50**	**2014**	82	82	9%	**89**	
Marcus 9th - Food Service Boilers	**20**	**2014**	55	55		**55**	
Marcus 9th - Food Service Freezers	**20**	**2014**	55	55		**55**	
Marcus 9th - Generator	**40**	**2014**	78	78		**78**	**Cummins - Diesel; 200 KW; Supply 9th and MAC**
Marcus 9th - Flooring - Classrooms - VCT	**20**	**2014**	55	55		**55**	**VCT**
Marcus 9th - Flooring - Corridors - VCT	**20**	**2014**	55	55		**55**	**VCT**
Marcus 9th - Flooring - Corridors - Stained Concrete	**30**	**2014**	70	70		**70**	**Stained concrete**
Marcus 9th - Flooring - Library	**30**	**2014**	70	70		**70**	**Stained concrete**
Marcus 9th - Flooring - Offices	**20**	**2014**	55	55		**55**	**VCT**
Marcus 9th - Flooring - Cafeteria	**30**	**2014**	70	70		**70**	**Stained concrete**
Marcus 9th - Flooring - Kitchen	**50**	**2014**	82	82		**82**	**Terrazzo**
Marcus 9th - Plastic Laminate	**40**	**2014**	78	78		**78**	
Marcus 9th - Doors	**20**	**2014**	55	55		**55**	**Mahogany**
Marcus 9th - Door Hardware	**20**	**2014**	55	55		**55**	
Marcus 9th - Casework (Built-Ins)	**20**	**2014**	55	55		**55**	
Marcus 9th - Restrooms - Faculty	**20**	**2014**	55	55		**55**	**Ceramic tile**
Marcus 9th - Restrooms - Student	**20**	**2014**	55	55		**55**	**Ceramic tile; CMU**
Marcus 9th - Marquee	**15**	**2014**	40	40		**40**	**LED; Digital**
Marcus 9th - Paving - Parking Lots	**50**	**2014**	82	82		**82**	
Marcus 9th - Paving - Sidewalks	**40**	**2014**	78	78		**78**	
Marcus 9th - Exterior Lighting	**20**	**2014**	55	55		**55**	**LED**
Marcus 9th - Paint - Commons	**15**	**2018**	67	67		**67**	
Marcus 9th - Paint - Cafeteria	**15**	**2018**	67	67		**67**	
Marcus 9th - Paint - Exterior	**20**	**2014**	55	55		**55**	
Marcus 9th - Paint - Hallways	**20**	**2014**	55	55		**55**	**some areas painted in 2018 - as needed**
Sports and Fine Arts							
Marcus 9th - Cafetorium - Projector Lift	**2019**						**Technology Item - Tracking purposes only - replaced Summer of 2019**
Marcus 9th - Cafetorium - Curtains	**20**	**2014**	55	55		**55**	
Marcus 9th - Cafetorium - Lighting	**20**	**2014**	55	55		**55**	**LED**

Flower Mound HS

Year Built / Age 1999 / 24

Campus Square Footage 531,715

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1999**	**52**				
MAIN CAMPUS							
Flower Mound HS - HVAC - Original	**20**	**2021**	90	90		**90**	**RTU**
Flower Mound HS - HVAC - 2002 Addition	**20**	**2002**	-5	10	9%	**2**	**Auditorium, RTU**
Flower Mound HS - HVAC - 2008 Addition	**20**	**2008**	25	25	9%	**27**	**Gym, Wrestling, Fine Arts, RTU**
Flower Mound HS - HVAC - 2014 Addition	**20**	**2014**	55	55	9%	**60**	**Blackbox, RTU**
Flower Mound HS - HVAC - 2023 Addition	**20**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Flower Mound HS - Ceiling and Lights - Original	**20**	**2021**	90	90		**90**	
Flower Mound HS - Ceiling and Lights - 2002 Addition	**20**	**2002**	-5	0		**-3**	**Auditorium House Lighting**
Flower Mound HS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	20		**23**	**Gym, Wrestling, Fine Arts**
Flower Mound HS - Ceiling and Lights - 2014 Addition	**20**	**2014**	55	55		**55**	**Blackbox**
Flower Mound HS - Ceiling and Lights - 2023 Addition	**20**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Roof - Original	**20**	**2021**	90	90		**90**	
Flower Mound HS - Roof - 2002 Addition	**20**	**2002**	-5	5	14%	**0**	**Auditorium**
Flower Mound HS - Roof - 2008 Addition	**20**	**2008**	25	25	14%	**28**	**Gym, Wrestling, Fine Arts**
Flower Mound HS - Roof - 2014 Addition	**20**	**2014**	55	55	14%	**63**	**Blackbox**
Flower Mound HS - Roof - 2023 Addition	**20**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Electrical Switchgear - Orig	**30**	**1999**	20	20	0%	**20**	
Flower Mound HS - Electrical Panels - 2002 Add	**30**	**2002**	30	30	0%	**30**	**Auditorium**
Flower Mound HS - Electrical Panels - 2008 Add	**30**	**2008**	50	50	0%	**50**	**Gym, Wrestling, Fine Arts**
Flower Mound HS - Electrical Panels - 2014 Add	**30**	**2014**	70	70	0%	**70**	**Blackbox**
Flower Mound HS - Electrical Panels - 2023 Add	**30**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Elevator #1 (main)	**25**	**2022**	96	96	20%	**100**	**Dover**
Flower Mound HS - Elevator #2 (Stadium)	**25**	**2003**	20	10	0%	**15**	**Schindler**
Flower Mound HS - Elevator #3 (Arena)	**25**	**2014**	64	60	14%	**71**	**Thyssen Krupp**
Flower Mound HS - Lift (Auditorium)	**25**	**2002**	16	16		**16**	**Nat'l Wheel-O-Vator**
Flower Mound HS - Fire Safety - Fire Alarm	**20**	**2014**	55	55	0%	**55**	**New Panel / Original Devices; Edwards EST 3**
Flower Mound HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Flower Mound HS - Fire Safety - Sprinkler Sys-Orig	**50**	**1999**	52	52	-8%	**48**	
Flower Mound HS - Fire Safety - Sprinkler Sys-2002 Add	**50**	**2002**	58	58	-8%	**54**	**Auditorium**
Flower Mound HS - Fire Safety - Sprinkler Sys-2008 Add	**50**	**2008**	70	70	-8%	**65**	**Gym, Wrestling, Fine Arts**
Flower Mound HS - Fire Safety - Sprinkler Sys-2014 Add	**50**	**2014**	82	82		**82**	**Blackbox**
Flower Mound HS - Fire Safety - Sprinkler Sys-2023 Add	**50**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Storm Shelter - 2023 Add	**50**	**2023**	100	100		**100**	**Fine Arts Addition**
Flower Mound HS - Food Service Boilers	**20**	**2022**	95	95		**95**	
Flower Mound HS - Food Service Freezers	**20**	**2021**	90	90		**90**	
Flower Mound HS - Generator	**40**	**2022**	98	98		**98**	**Kohler - Diesel; 81 KW**
Flower Mound HS - Flooring - Classrooms - VCT	**20**	**2021**	90	90		**90**	**VCT**
Flower Mound HS - Flooring - Corridors - VCT	**20**	**2021**	90	90		**90**	**VCT**
Flower Mound HS - Flooring - Library	**20**	**2021**	90	90		**90**	**LVT**
Flower Mound HS - Flooring - Offices	**15**	**2022**	93	93		**93**	**Carpet**
Flower Mound HS - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Flower Mound HS - Flooring - Kitchen	**50**	**1999**	52	52		**52**	**Terrazzo**
Flower Mound HS - Flooring - Band	**20**	**2018**	75	75		**75**	**VCT**
Flower Mound HS - Flooring - Choir	**20**	**2018**	75	75		**75**	**VCT**
Flower Mound HS - Flooring - Drama	**20**	**2018**	75	75		**75**	**VCT**
Flower Mound HS - Flooring - Orchestra	**20**	**2018**	75	75		**75**	**VCT**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Flower Mound HS - Flooring - 2023 Fine Arts Addition	20	2023	100	100		100	VCT
Flower Mound HS - Plastic Laminate	40	2002	48	48		48	
Flower Mound HS - Doors	20	2021	90	90		90	
Flower Mound HS - Door Hardware	20	2021	90	90		90	
Flower Mound HS - Casework (Built-Ins)	20	2021	90	90		90	
Flower Mound HS - Restrooms - Faculty	20	2021	90	90		90	
Flower Mound HS - Restrooms - Student	20	2021	90	90		90	
Flower Mound HS - Restrooms - 2002 Addition	20	2021	90	90		90	
Flower Mound HS - Restrooms - 2008 Addition	20	2008	25	20		23	
Flower Mound HS - Restrooms - 2014 Addition	20	2014	55	55		55	Auditorium
Flower Mound HS - Marquee	20	2017	70	70		70	Monument sign only; not lit
Flower Mound HS - Paving - Parking Lots	50	1999	52	52		52	Concrete; need to address parking lot lighting
Flower Mound HS - Paving - Parking Lots	50	2013	80	80		80	Concrete, North Lot; need to address parking lot lighting
Flower Mound HS - Paving - Sidewalks	40	1999	40	35		38	Some sinking in areas
Flower Mound HS - Exterior Lighting	20	2013	50	50		50	LED
Flower Mound HS - Paint - Commons	15	2021	87	87		87	
Flower Mound HS - Paint - Cafeteria	15	2022	93	93		93	
Flower Mound HS - Paint - Auditorium	15	2019	73	73		73	
Flower Mound HS - Paint - J.A.C.	15	2014	40	45		43	paint maintained 2023
Flower Mound HS - Paint - Gyms	20	2021	90	90		90	
Flower Mound HS - Paint - Exterior	20	2022	95	95		95	
Flower Mound HS - Paint - Hallways	20	2022	95	95		95	
Flower Mound HS - Cafetorium - Curtains	20	2020	85	85		85	
Flower Mound HS - Cafetorium - Lighting	25	2021	92	92		92	
Flower Mound HS - Auditorium Curtains	20	2022	95	95		95	
Flower Mound HS - Auditorium Stage Lighting	25	2002	16	10		13	
Flower Mound HS - Auditorium Sound		2014				-	Tracking Replacement Yr only - In Technology Dept. Plans
Flower Mound HS - Auditorium Seating	20	2002	-5	5		0	
Flower Mound HS - Auditorium Flooring	15	2019	73	73		73	Replaced Summer of 2019
Flower Mound HS - Large Gym - Flooring	40	2020	93	93		93	Replaced Summer of 2020
Flower Mound HS - Large Gym - Bleachers	30	1999	20	20		20	Repairs made Summer 2019
Flower Mound HS - Large Gym - Scoreboard	20	2013	50	50		50	Nevco
Flower Mound HS - Middle Gym - Flooring	40	2012	73	73		73	
Flower Mound HS - Middle Gym - Bleachers	30	1999	20	20		20	Major repairs in 2018
Flower Mound HS - Middle Gym - Scoreboard	20	1999	-20	0		-10	Fair Play
Flower Mound HS - 2008 Gym - Flooring	20	2008	25	25		25	Rubber
Flower Mound HS - 2008 Gym - Bleachers	30	2008	50	50		50	
Flower Mound HS - Girls Locker Rooms - Flooring	20	2012	45	45		45	Epoxy
Flower Mound HS - Girls Locker Rooms - Benches	20	2012	45	45		45	Plastic wood
Flower Mound HS - Girls Locker Rooms - Partitions	20	2012	45	35		40	PLam
Flower Mound HS - Boys Locker Rooms - Flooring	20	2018	75	75		75	Epoxy
Flower Mound HS - Boys Locker Rooms - Benches	50	2018	90	90		90	Concrete
Flower Mound HS - Boys Locker Rooms - Partitions	20	2021	90	90		90	
STADIUM 2003							
Flower Mound HS - Stadium Bleachers	40	2003	50	50		50	
Flower Mound HS - Stadium Artificial Turf	8	2021	75	75		75	
Flower Mound HS - Stadium Synthetic Track	10	2012	-10	0		-5	Major track repair (twice) due to water faucet; repairs needed again
Flower Mound HS - Stadium PA System		2013				-	Tracking Replacement Yr only - In Technology Dept. Plans
Flower Mound HS - Stadium Lightpoles	30	2003	33	33		33	
Flower Mound HS - Stadium Scoreboard	18	2003	-11	0		-6	No longer supported
Flower Mound HS - Stadium Pressbox HVAC	20	2003	0	5		3	
Flower Mound HS - Stadium Pressbox Roof	20	2003	0	10		5	
Flower Mound HS - Stadium Pressbox Flooring	20	2003	0	10		5	Carpet; VCT
Flower Mound HS - Stadium Ticket / Concession - Home (2) - HVAC	20	2004	5	5		5	Package unit A/C only on Ticket booth installed by booster

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Flower Mound HS - Stadium Ticket / Concession - Home (2) - Roof	30	2003	33	33		33	Metal
Flower Mound HS - Stadium Ticket / Concession - Visitor (2) - Roof	30	2003	33	33		33	Metal
Flower Mound HS - Stadium Restrooms - Home	20	2003	0	10		5	Removed old drinking fountains and bricked wall; Painted 2018
Flower Mound HS - Stadium Restrooms - Visitor	20	2003	0	10		5	Painted 2018
Flower Mound HS - Stadium Band Tower	50	2023	100	100		100	
Flower Mound HS - Lightning Detection		2023					Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
Flower Mound HS - Field House HVAC	20	2010	35	35		35	
Flower Mound HS - Field House Roof - Metal	30	2010	57	57		57	
Flower Mound HS - Field House Electrical Panels	30	2010	57	57		57	Square D
Flower Mound HS - Field House Fire Safety - Alarm System	20	2010	35	40		38	EST - 3; Tied to Main bldg. Warning detection devices only.
Flower Mound HS - Field House Fire Safety - Sprinkler System	50	2010	74	74		74	
Flower Mound HS - Field House Flooring - Carpet	15	2010	13	10		12	
Flower Mound HS - Field House Flooring - Epoxy	20	2010	35	35		35	
Flower Mound HS - Field House Flooring - Concrete/Terrazzo	50	2010	74	74		74	
Flower Mound HS - Field House Restrooms	20	2010	35	35		35	
Flower Mound HS - Field House Restrooms - Coaches	20	2010	35	35		35	
Flower Mound HS - Field House Lockers	40	2010	68	68		68	
Flower Mound HS - Field House Benches	50	2010	74	74		74	Concrete
Flower Mound HS - Field House Paint	15	2019	73	73		73	
Flower Mound HS - Field House Exterior Lighting	20	2010	35	35		35	
J.A.C. 2014 / FIELD HOUSE 1999							
Flower Mound HS - J.A.C. Fire Safety - Alarm System	20	2014	55	55		55	Tied to Main bldg. Warning detection devices only. EST 3
Flower Mound HS - J.A.C. - HVAC	20	2014	55	55		55	Square D
Flower Mound HS - J.A.C. - Roof - Flat	20	2014	55	55		55	Mod Bit
Flower Mound HS - J.A.C. - Electrical Panels	30	2014	70	70		70	
Flower Mound HS - J.A.C. - Fire Safety - Sprinkler System	50	2014	82	82		82	
Flower Mound HS - J.A.C. - Gym Flooring	40	2014	78	78		78	
Flower Mound HS - J.A.C. - Bleachers	30	2014	70	70		70	Retractable
Flower Mound HS - J.A.C. - Restrooms	20	2014	55	55		55	
Flower Mound HS - J.A.C. - Scoreboard	20	2014	55	55		55	Spectrum
Flower Mound HS - J.A.C. - Locker Room Flooring	20	2014	55	55		55	Epoxy
Flower Mound HS - J.A.C. - Locker Room Benches	50	2014	82	82		82	Concrete
Flower Mound HS - J.A.C. - Locker Room Lockers	40	2014	78	78		78	
Flower Mound HS - Field House 1999 -HVAC	20	2021	90	90		90	
Flower Mound HS - Field House 1999 - Roof - Flat	20	2021	90	90		90	
Flower Mound HS - Field House 1999 - Electrical Panels	30	1999	20	20		20	Square D
Flower Mound HS - Field House 1999 - Fire Safety - Sprinkler System	50	1999	52	52		52	
Flower Mound HS - Field House 1999 - Flooring - VCT	20	2018	75	75		75	
Flower Mound HS - Field House 1999 - Locker Room Flooring	20	2018	75	75		75	
Flower Mound HS - Field House 1999 - Locker Room Benches	20	2018	75	75		75	Linex
Flower Mound HS - Field House 1999 - Locker Room Lockers	40	1999	40	35		38	
Flower Mound HS - Field House 1999 - Paint - Exterior	20	2021	90	90		90	
INDOOR ATHLETIC CENTER 2013							

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Flower Mound HS - IAC - HVAC	20	2013	50	40		45	
Flower Mound HS - IAC - Roof - Metal	30	2013	67	67		67	
Flower Mound HS - IAC - Electrical Panels	30	2013	67	67		67	EATON
Flower Mound HS - IAC - Fire Safety - Alarm System	20	2013	50	50		50	EST 3 - has own account
Flower Mound HS - IAC - Fire Safety - Sprinkler System	50	2013	80	80		80	
Flower Mound HS - IAC - Artificial Turf	15	2013	33	20		27	Repairs, Leveled and cleaned 2021; damaged from weights
Flower Mound HS - IAC - Weight Room Flooring	20	2023	100	100		100	Athletics replaced flooring Summer 2023
Flower Mound HS - IAC - Paint	20	2013	50	50		50	Lower walls 2019
Flower Mound HS - IAC - Paint - Exterior	20	2013	50	50		50	
SPORTS COMPLEX 2014							
Flower Mound HS - Sports Complex -Parking Lots	50	2014	82	82		82	
Flower Mound HS - Sports Complex - Exterior Lighting	20	2014	55	55		55	LED
BASEBALL FIELD 2014							
Flower Mound HS - Baseball Field Bleachers	40	2014	78	78		78	
Flower Mound HS - Baseball Field Backstop Netting	15	2014	40	40		40	minor repairs in 2019 & 2021
Flower Mound HS - Baseball Field Scoreboard	20	2014	55	55		55	LED wireless; Spectrum
Flower Mound HS - Baseball Field Pressbox	20	2014	55	55		55	
Flower Mound HS - Baseball Field Dugout Paint	15	2014	40	40		40	
Flower Mound HS - Baseball Field Light poles	30	2014	70	70		70	
Flower Mound HS - Baseball Field Leveling	4	2021	50	50		50	High Traffic/Use
Flower Mound HS - Baseball Field Batting Cage	20	2014	55	55		55	Added new lighting in 2017; flooring coming up in spots; Athletics is replacing turf 2023
Restrooms / Concession							
Flower Mound HS - Baseball Field Concession HVAC	20	2014	55	55		55	
Flower Mound HS - Baseball Field Concession Roof - Metal	30	2014	70	70		70	
Flower Mound HS - Baseball Field Concession Flooring	20	2014	55	55		55	Epoxy & concrete
SOFTBALL FIELD 2014							
Flower Mound HS - Softball Field Bleachers	40	2014	78	78		78	
Flower Mound HS - Softball Field Restrooms	-					-	Shared with Baseball
Flower Mound HS - Softball Field Backstop Netting	15	2014	40	40		40	Minor repairs 2019
Flower Mound HS - Softball Field Scoreboard	20	2014	55	55		55	LED - Wireless; Spectrum
Flower Mound HS - Softball Field Pressbox	20	2014	55	55		55	
Flower Mound HS - Softball Field Dugout Paint	15	2014	40	40		40	
Flower Mound HS - Softball Field Light poles	30	2014	70	70		70	MUSCO
Flower Mound HS - Softball Field Leveling	4	2020	25	25		25	2023/24 renovation & laser grade scheduled
Flower Mound HS - Softball Field Batting Cage	20	2014	55	55		55	
Flower Mound HS - Softball Field Concession	-					-	Shared with Baseball
TENNIS COURTS 2014							
Flower Mound HS - Tennis Courts	50	2014	82	82		82	12 Courts; Ironite rock causing chips in surface
Flower Mound HS - Tennis Courts Resurfaced	10	2014	10	10		10	2019 repairs made & look good; some minor chipping outside of play area
Flower Mound HS - Tennis Courts Light Poles	30	2014	70	70		70	18 for all 12 courts
Flower Mound HS - Tennis Courts Shade Structure	20	2014	55	55		55	

Hebron HS

Year Built / Age 1999 / 24

Campus Square Footage 611,264

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1999**	**52**				
MAIN CAMPUS							
Hebron HS - HVAC - Original	**20**	**2021**	90	85		**88**	**RTU**
Hebron HS - HVAC - 2002 Addition	**20**	**2002**	-5	10	5%	**2**	**Auditorium, classroom wings, RTU**
Hebron HS - HVAC - 2008 Addition	**20**	**2008**	25	25	5%	**26**	**Gym, Wrestling, Fine Arts, RTU**
Hebron HS - HVAC - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box & Fine Art Addition**
Hebron HS - HVAC - Controls	**20**	**2021**	90	90		**90**	**Controls = I/net; Locker Rms = Reliable; Additions 2002 & 2008**
Hebron HS - Ceiling and Lights -Original	**20**	**2021**	90	90		**90**	**LED; Digital**
Hebron HS - Ceiling and Lights - 2002 Addition	**20**	**2002**	-5	10		**3**	**Auditorium House Lights, Classroom wings**
Hebron HS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**Gym, Wrestling, Fine Arts, RTU**
Hebron HS - Ceiling and Lights - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box & Fine Art Addition**
Hebron HS - Roof - Flat - Original	**20**	**2021**	90	90		**90**	**Mod Bit**
Hebron HS - Root - Flat - 2002 Addition	**20**	**2002**	-5	5	20%	**0**	**4 ply; Auditorium, classroom wings**
Hebron HS - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	20%	**30**	**4 ply; Gym, Wrestling, Fine Arts**
Hebron HS - Roof - Flat - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box & Fine Art Addition**
Hebron HS - Electrical Switchgear - Original	**30**	**1999**	20	20	4%	**21**	
Hebron HS - Electrical Panels - 2002 Addition	**30**	**2002**	30	30	4%	**31**	**Auditorium, classroom wings**
Hebron HS - Electrical Panels - 2008 Addition	**30**	**2008**	50	50	4%	**52**	**Gym, Wrestling, Fine Arts**
Hebron HS - Electrical Panels - 2022 Addition	**30**	**2022**	97	97		**97**	**Black Box & Fine Art Addition**
Hebron HS - Elevator #1 (main)	**25**	**2022**	96	96	20%	**100**	**Smartwise**
Hebron HS - Elevator #2 (Stadium)	**25**	**2003**	20	10	19%	**18**	**Schindler**
Hebron HS - Elevator #3 (Arena)	**25**	**2021**	92	92	20%	**100**	**Otis**
Hebron HS - Lift (Auditorium)	**25**	**2001**	12	12		**12**	**Nat'l Wheel-O-Vator**
Hebron HS - Lift (Softball Press Box)	**-**					**-**	**Removed 7/2019**
Hebron HS - Lift (Baseball Press Box)	**-**					**-**	**Removed 7/2020**
Hebron HS - Fire Safety - Fire Alarm	**20**	**2021**	90	90		**90**	**Edwards EST 3**
Hebron HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Hebron HS - Fire Safety - Sprinkler System - Original	**50**	**1999**	52	52	-5%	**50**	
Hebron HS - Fire Safety - Sprinkler System - 2002 Addition	**50**	**2002**	58	58	-5%	**55**	**Auditorium, classroom wings**
Hebron HS - Fire Safety - Sprinkler System - 2008 Addition	**50**	**2008**	70	70	-5%	**67**	**Gym, Wrestling, Fine Arts**
Hebron HS - Fire Safety - Sprinkler System - 2022 Addition	**50**	**2022**	98	98		**98**	**Black Box & Fine Art Addition**
Hebron HS - Storm Shelter - 2022 Addition	**50**	**2022**	98	98		**98**	**Black Box**
Hebron HS - Food Service Boilers	**20**	**2011**	40	40		**40**	**Tank**
Hebron HS - Food Service Freezers	**20**	**2021**	90	90		**90**	
Hebron HS - Generator	**40**	**2021**	95	95		**95**	**Cummins - Diesel; 80 KW; supplies MAC & IAC**
Hebron HS - Flooring - Classrooms - VCT	**20**	**2021**	90	90		**90**	
Hebron HS - Flooring - Corridors - VCT	**20**	**2021**	90	90		**90**	**VCT**
Hebron HS - Flooring - Library	**20**	**2020**	85	85		**85**	**LVT**
Hebron HS - Flooring - Offices	**20**	**2020**	85	85		**85**	**VCT**
Hebron HS - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Hebron HS - Flooring - Kitchen	**50**	**1999**	52	52		**52**	**Terrazzo**
Hebron HS - Flooring - Band	**20**	**2008**	25	25		**25**	**VCT**
Hebron HS - Flooring - Choir	**20**	**2021**	90	90		**90**	**VCT**
Hebron HS - Flooring - Orchestra	**20**	**2021**	90	90		**90**	**VCT**
Hebron HS - Flooring - Stairs	**20**	**2021**	90	90		**90**	
Hebron HS - Flooring - 2022 **Black Box & Fine Arts Addition**	**20**	**2022**	95	95		**95**	**VCT**
Hebron HS - Plastic Laminate	**40**	**2002**	48	48		**48**	
Hebron HS - Doors	**20**	**2021**	90	90		**90**	
Hebron HS - Door Hardware	**20**	**2021**	90	90		**90**	
Hebron HS - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	
Hebron HS - Restrooms - Faculty	**20**	**2021**	90	90		**90**	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Hebron HS - Restrooms - Student	20	2021	90	90		90	
Hebron HS - Restrooms - 2002 Addition	20	2021	90	90		90	
Hebron HS - Restrooms - 2008 Addition	20	2008	25	25		25	
Hebron HS - Marquee	15	2020	80	80		80	LED; Digital
Hebron HS - Paving - Parking Lots	50	1999	52	52		52	
Hebron HS - Paving - Parking Lots	50	2009	72	72		72	
Hebron HS - Paving - Sidewalks	40	1999	40	40		40	
Hebron HS - Exterior Lighting	20	2020	85	85		85	Still need additional pole lights campus to stadium on west
Hebron HS - Paint - Commons	15	2021	87	87		87	
Hebron HS - Paint - Cafeteria	15	2021	87	87		87	
Hebron HS - Paint - Auditorium	15	2015	47	47		47	
Hebron HS - Paint - Gyms	20	2022	95	95		95	
Hebron HS - Paint - Exterior	20	2022	95	95		95	
Hebron HS - Paint - Hallways	20	2022	95	95		95	
Hebron HS - Cafetorium - Curtains	20	2021	90	90		90	
Hebron HS - Cafetorium - Lighting	25	2021	92	92		92	
Hebron HS - Auditorium Curtains	20	2017	70	70		70	Additional curtains replaced Summer 2022
Hebron HS - Auditorium Stage Lighting	20	2002	-5	10		3	
Hebron HS - Auditorium Sound		2014				-	Tracking Replacement Yr only - In Technology Dept. Plans
Hebron HS - Auditorium Seating	20	2002	-5	10		3	
Hebron HS - Auditorium Flooring	15	2017	60	60		60	
Hebron HS - Large Gym - Flooring	40	1999	40	40		40	2018 Sanded and painted (2nd sanding)
Hebron HS - Large Gym - Bleachers	30	1999	20	20		20	Retractable
Hebron HS - Large Gym - Scoreboard	20	1999	-20	5		-8	
Hebron HS - Middle Gym - Flooring	40	1999	40	40		40	2018 Sanded and painted (2nd sanding)
Hebron HS - Middle Gym - Bleachers	30	1999	20	20		20	
Hebron HS - Middle Gym - Scoreboard	20	1999	-20	5		-8	
Hebron HS - 2008 Gym - Flooring	20	2008	25	15		20	Rubber (cracking)
Hebron HS - 2008 Gym - Bleachers	30	2008	50	50		50	
Hebron HS - Girls Locker Rooms - Flooring	20	2008	25	25		25	Epoxy
Hebron HS - Girls Locker Rooms - Benches	20	2015	60	60		60	Linex
Hebron HS - Girls Locker Rooms - Partitions	20	2008	25	25		25	
Hebron HS - Boys Locker Rooms - Flooring	20	2021	90	90		90	Epoxy
Hebron HS - Boys Locker Rooms - Benches	20	2015	60	60		60	Linex
Hebron HS - Boys Locker Rooms - Partitions	20	2021	90	90		90	Solid Plastic
STADIUM 2003							
Hebron HS - Stadium Bleachers	40	2003	50	45		48	
Hebron HS - Stadium Artificial Turf	8	2021	75	75		75	
Hebron HS - Stadium Synthetic Track	10	2013	0	10		5	Repainted/Repaired 2018; drainage problems; additional minor repairs in 2022
Hebron HS - Stadium PA System		2013				-	Tracking Replacement Yr only - In Technology Dept. Plans
Hebron HS - Stadium Light poles	30	2014	70	70		70	
Hebron HS - Stadium Scoreboard	18	2003	-11	5		-3	
Hebron HS - Stadium Pressbox HVAC	20	2003	0	5		3	
Hebron HS - Stadium Pressbox Roof	20	2003	0	5		3	2 PLY Mod bit
Hebron HS - Stadium Pressbox Flooring	20	2019	80	80		80	VCT; interior walls painted 2017
Hebron HS - Stadium Ticket Booth(s)	20	2003	0	5		3	
Hebron HS - Stadium Restrooms / Concession - Home - HVAC	20	2010	35	25		30	Package unit on concessions installed by booster; restroom HVAC needs
Hebron HS - Stadium Restrooms / Concession - Home - Roof - Flat	20	2003	0	5		3	
Hebron HS - Stadium Restrooms / Concession - Home - Flooring	50	2003	60	60		60	Concrete
Hebron HS - Stadium Restrooms / Concession - Visitor - Roof	20	2003	0	5		3	Shingled
Hebron HS - Stadium Restrooms - Visitor	20	2003	0	5		3	Painted 2018
Hebron HS - Stadium Band Tower	50						In Progress
Hebron HS - Lightning Dectection		2023				-	Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
Hebron HS - Field House 2010 - HVAC	20	2010	35	35		35	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Hebron HS - Field House 2010 - Roof - Metal	30	2010	57	57		57	
Hebron HS - Field House 2010 - Electrical Panels	30	2010	57	57		57	
Hebron HS - Field House 2010 - Fire Safety - Alarm System	20	2010	35	35		35	Tied to Main Bldg, Warning detection devices only
Hebron HS - Field House 2010 - Fire Safety - Sprinkler System	50	2010	74	74		74	
Hebron HS - Field House 2010 - Flooring - Carpet	15	2010	13	13		13	
Hebron HS - Field House 2010 - Flooring - Epoxy	20	2010	35	35		35	
Hebron HS - Field House 2010 - Flooring - Concrete/Terrazzo	50	2010	74	74		74	
Hebron HS - Field House 2010 - Restrooms	20	2010	35	30		33	CT floors, CT walls
Hebron HS - Field House 2010 - Restrooms - Coaches	20	2010	35	35		35	
Hebron HS - Field House 2010 - Lockers	40	2010	68	60		64	
Hebron HS - Field House 2010 - Benches	50	2010	74	74		74	Concrete
Hebron HS - Field House 2010 - Paint	15	2010	13	15		14	Hallways & Locker rms painted 2015
Hebron HS - Field House 2010 - Exterior Lighting	20	2010	35	35		35	
OLD FIELD HOUSE / WEIGHT ROOM / INDOOR TURF 2003							
Hebron HS - IAC/ Weight Room/ Field House 2003 - HVAC	20	2003	0	10		5	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Roof - Flat	20	2003	0	10		5	4 Ply Built Up
Hebron HS - IAC/ Weight Room/ Field House 2003 - Electrical Panels	30	2003	33	33		33	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Fire Safety - Alarm System	20	2003	0	10		5	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Fire Safety - Sprinkler System	50	2003	60	60		60	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Artificial Turf	15	2003	-33	10		-12	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Flooring - VCT	20	2003	0	10		5	VCT
Hebron HS - IAC/ Weight Room/ Field House 2003 - Locker Room Flooring	20	2003	0	5		3	Epoxy
Hebron HS - IAC/ Weight Room/ Field House 2003 - Locker Room Benches	20	2014	55	40		48	Linex
Hebron HS - IAC/ Weight Room/ Field House 2003 - Locker Room Lockers	40	2020	93	93		93	JV -2019; Varsity - 2020; all new lockers
Hebron HS - IAC/ Weight Room/ Field House 2003 - Weight room flooring	20	2023	100	100		100	Athletics replaced flooring Summer 2023
Hebron HS - IAC/ Weight Room/ Field House 2003 - Paint	15	2016	53	53		53	
Hebron HS - IAC/ Weight Room/ Field House 2003 - Paint - Exterior	20	2003	0	10		5	Doors/Post/Rails new 2016
H.A.C. 2021							
Hebron HS - H.A.C. - Fire Safety - Alarm System	20	2021	90	90		90	
Hebron HS - H.A.C. - HVAC	20	2021	90	90		90	
Hebron HS - H.A.C. - Roof - Flat	20	2021	90	90		90	
Hebron HS - H.A.C. - Electrical Panels	30	2021	93	93		93	
Hebron HS - H.A.C. - Fire Safety - Sprinkler System	50	2021	96	96		96	
Hebron HS - H.A.C. - Gym Flooring	40	2021	95	95		95	
Hebron HS - H.A.C. - Bleachers	30	2021	93	93		93	
Hebron HS - H.A.C. - Restrooms	20	2021	90	90		90	
Hebron HS - H.A.C. - Scoreboard	20	2021	90	90		90	
Hebron HS - H.A.C. - Locker Room Flooring	20	2021	90	90		90	
Hebron HS - H.A.C. - Locker Room Benches	50	2021	96	96		96	concrete
Hebron HS - H.A.C. - Locker Room Lockers	40	2021	95	95		95	
BASEBALL FIELD 1999							
Hebron HS - Baseball Field Bleachers	40	1999	40	40		40	
Hebron HS - Baseball Field Restrooms	-					-	See stadium visitor restrooms
Hebron HS - Baseball Field Backstop Netting	15	2019	73	73		73	Replaced netting between 2018, 2019, & 2022
Hebron HS - Baseball Field Scoreboard	20	2016	65	65		65	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Hebron HS - Baseball Field Pressbox	20	2003	0	10		5	
Hebron HS - Baseball Field Dugout Paint	15	2023	100	100		100	
Hebron HS - Baseball Field Light poles	30	1999	20	15		18	
Hebron HS - Baseball Field Leveling	4	2022	75	75		75	High Traffic/use
Hebron HS - Baseball Field Batting Cage	20	2012	45	45		45	Athletics is replacing turf 2023
Hebron HS - Baseball Field Concession	20	2006	15	15		15	Shared with softball
SOFTBALL FIELD 1999							
Hebron HS - Softball Field Bleachers	40	1999	40	20		30	
Hebron HS - Softball Field Restrooms	-					-	See stadium visitor restrooms
Hebron HS - Softball Field Backstop Netting	15	2010	13	13		13	Minor repairs to nets in 2019
Hebron HS - Softball Field Scoreboard	20	2016	65	65		65	Spectrum
Hebron HS - Softball Field Pressbox	20	2003	0	5		3	
Hebron HS - Softball Field Dugout Paint	15	2023	100	100		100	
Hebron HS - Softball Field Light poles	30	1999	20	20		20	
Hebron HS - Softball Field Leveling	4	2020	25	25		25	renovation scheduled for 2023/24 and top edges
Hebron HS - Softball Field Batting Cage	20	2012	45	45		45	New nets 2019
Hebron HS - Softball Field Concession	-					-	Shared with baseball
TENNIS COURTS 2019							
Hebron HS - Tennis Courts	50	2019	92	92		92	12 Courts
Hebron HS - Tennis Courts - Resurfaced	10	2019	60	60		60	
Hebron HS - Tennis Courts - Light Poles	30	2019	87	87		87	
Hebron HS - Tennis Courts Shade Structure	20	2019	80	80		80	

Lewisville HS

Year Built / Age 1968 Rebuilt 2012 / 11

Campus Square Footage 449,867

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2012**	**78**				
MAIN CAMPUS							
Lewisville HS - HVAC - 1999 Addition	**20**	**2008**	25	25	-4%	**24**	**Classrooms, Fine Arts, CHILLER**
Lewisville HS - HVAC - 2008 Addition	**20**	**2008**	25	25	-4%	**24**	**Science Wing, CHILLER**
Lewisville HS - HVAC - 2012 Addition	**20**	**2012**	45	45	-4%	**43**	**Main Campus, CHILLER**
Lewisville HS - HVAC - 2014 Addition	**20**	**2014**	55	55	-4%	**53**	**Auditorium, CHILLER**
Lewisville HS - HVAC - 2022 Addition	**20**	**2022**	95	95		**95**	**RTU - Fine Arts Addition**
Lewisville HS - HVAC - Controls	**20**	**2012**	45	45		**45**	**Controls = Alerton**
Lewisville HS - Ceiling and Lights - 1999 Addition	**20**	**2014**	55	55		**55**	**Classrooms, Fine Arts; T-5**
Lewisville HS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**Science Wing; T-5**
Lewisville HS - Ceiling and Lights - 2012 Addition	**20**	**2012**	45	45		**45**	**Main Campus; T-5**
Lewisville HS - Ceiling and Lights - 2014 Addition	**20**	**2014**	55	55		**55**	**Auditorium House Lights; T-5**
Lewisville HS - Ceiling and Lights - 2022 Addition	**20**	**2022**	95	95		**95**	**Fine Arts Addition**
Lewisville HS - Roof - 1999 Addition	**20**	**1999**	-20	5	-5%	**-8**	**Classrooms, Fine Arts; 4 ply Built up**
Lewisville HS - Roof - 2008 Addition	**20**	**2008**	25	25	-5%	**24**	**Science Wing**
Lewisville HS - Roof - 2012 Addition	**20**	**2012**	45	45	-5%	**43**	**Main Campus**
Lewisville HS - Roof - 2014 Addition	**20**	**2014**	55	55	-5%	**52**	**Auditorium**
Lewisville HS - Roof - 2022 Addition	**20**	**2022**	95	95		**95**	**Fine Arts Addition**
Lewisville HS - Elect Switchgear - 1999 Addition	**30**	**2012**	63	63	-10%	**57**	**Classrooms, Fine Arts**
Lewisville HS - Elect Panels - 2008 Addition	**30**	**2008**	50	50	-10%	**45**	**Science Wing**
Lewisville HS - Elect Panels - 2012 Addition	**30**	**2012**	63	63	-10%	**57**	**Main Campus**
Lewisville HS - Elect Panels - 2014 Addition	**30**	**2014**	70	70	-10%	**63**	**Auditorium**
Lewisville HS - Elect Panels - 2022 Addition	**30**	**2022**	97	97		**97**	**Fine Arts Addition**
Lewisville HS - Elevator #1 (Café/Arena)	**25**	**2011**	52	52	14%	**59**	**Schindler**
Lewisville HS - Elevator #2 (D-Wing)	**25**	**2008**	40	40	19%	**48**	**Thyssen Krupp**
Lewisville HS - Elevator #3 (E- Wing)	**25**	**1999**	4	10	20%	**8**	**Dover**
Lewisville HS - Elevator #4 (Goldsmith Stadium)	**25**	**2021**	92	92	20%	**100**	**Schindler Electric**
Lewisville HS - Elevator #5 (FB Field House)	**25**	**2010**	48	48	20%	**57**	**Schindler**
Lewisville HS - Lift (Rm A205-ROTC)	**25**	**2011**	52	52		**52**	**Garaventa**
Lewisville HS - Fire Safety - Fire Alarm	**20**	**2012**	45	0	-17%	**19**	**Harrington - No longer supported**
Lewisville HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Lewisville HS - Fire Sprinkler Sys - 1999 Add	**50**	**1999**	52	52	5%	**55**	**Classrooms, Fine Arts**
Lewisville HS - Fire Sprinkler Sys - 2008 Add	**50**	**2008**	70	70	5%	**73**	**Science Wing**
Lewisville HS - Fire Sprinkler Sys - 2012 Add	**50**	**2012**	78	78	5%	**82**	**Main Campus**
Lewisville HS - Fire Sprinkler Sys - 2014 Add	**50**	**2014**	82	82	5%	**86**	**Auditorium**
Lewisville HS - Fire Sprinkler Sys - 2022 Add	**50**	**2022**	98	98		**98**	**Fine Arts Addition**
Lewisville HS - Storm Shelter - 2022 Add	**50**	**2022**	98	98		**98**	**Athletics Addition**
Lewisville HS - Food Service Boilers	**20**	**2011**	40	40		**40**	
Lewisville HS - Food Service Freezers	**20**	**2012**	45	45		**45**	
Lewisville HS - Generator	**40**	**2012**	73	73		**73**	**Generac - Diesel; 600 KW; new water pump 2021**
Lewisville HS - Flooring - Classrooms	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Classrms - 2008 Add	**20**	**2008**	25	25		**25**	**VCT**
Lewisville HS - Flooring - Corridors	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Library	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Offices	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Cafeteria	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Kitchen	**50**	**2012**	78	78		**78**	**Terrazzo**
Lewisville HS - Flooring - Band	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - Choir	**15**	**2012**	27	27		**27**	**Carpet**
Lewisville HS - Flooring - Orchestra	**20**	**2012**	45	45		**45**	**VCT**
Lewisville HS - Flooring - 2022 Fine Arts Addition	**20**	**2022**	95	95		**95**	**VCT**
Lewisville HS - Plastic Laminate	**40**	**2008**	63	63		**63**	
Lewisville HS - Doors	**20**	**2012**	45	45		**45**	
Lewisville HS - Door Hardware	**20**	**2012**	45	45		**45**	
Lewisville HS - Casework (Built-Ins)	**20**	**2012**	45	45		**45**	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Lewisville HS - Restrooms - Faculty	20	2012	45	45		45	Ceramic tile
Lewisville HS - Restrooms - Student	20	2012	45	50		48	CMU Partitions, Ceramic tile floors/walls
Lewisville HS - Restrooms - 1999 Addition	20	1999	-20	25		3	Solid plastic Partitions; Partial Renovations
Lewisville HS - Restrooms - 2008 Addition	20	2008	25	25		25	
Lewisville HS - Restrooms - 2012 Addition	20	2012	45	45		45	
Lewisville HS - Restrooms - 2014 Addition	20	2014	55	55		55	
Lewisville HS - Marquee	15	2014	40	40		40	Brick, LED; Digital
Lewisville HS - Paving - Parking Lots	20	2005	10	15		13	Stadium & Band: Asphalt; Band 2021; need additional poles
Lewisville HS - Paving - Parking Lots	50	1994	42	42		42	Along / closest to Main Street, Concrete
Lewisville HS - Paving - Parking Lots	50	2012	78	78		78	Front of school, Concrete
Lewisville HS - Paving - Sidewalks	40	2012	73	73		73	
Lewisville HS - Exterior Lighting	20	2012	45	45		45	
Lewisville HS - Paint - Commons	15	2012	27	30		28	
Lewisville HS - Paint - Cafeteria	15	2012	45	45		45	
Lewisville HS - Paint - Auditorium	15	2012	27	27		27	
Lewisville HS - Paint - F.A.C.	15	2012	27	27		27	
Lewisville HS - Paint - Gyms	20	2012	45	45		45	
Lewisville HS - Paint - Exterior	20	2012	45	45		45	
Lewisville HS - Paint - Hallways	20	2012	45	40		43	P-Lam to 7'-0"; CMU not sealed
Lewisville HS - Cafetorium - Curtains	20	2012	45	45		45	
Lewisville HS - Cafetorium - Lighting	25	2012	56	56		56	T-5
Lewisville HS - Auditorium Curtains	20	2014	55	55		55	
Lewisville HS - Auditorium Stage Lighting	25	2014	64	55		60	
Lewisville HS - Auditorium Sound		2017				-	Tracking Replacement Yr only - In Technology Dept. Plans
Lewisville HS - Auditorium Seating	20	2014	55	55		55	
Lewisville HS - Auditorium Flooring	15	2014	40	10		25	Carpet
Lewisville HS - F.A.C. - Flooring	40	2012	73	73		73	Wood; Sanded and Refinished 2020
Lewisville HS - F.A.C. - Bleachers	30	2012	63	63		63	Retractable
Lewisville HS - F.A.C. - Restrooms	20	2012	45	45		45	
Lewisville HS - F.A.C. - Scoreboard	20	2012	45	45		45	
Lewisville HS - Gym 1 - Flooring	40	2012	73	73		73	Sanded and Refinished 2020
Lewisville HS - Gym 1- Bleachers	30	2012	63	63		63	
Lewisville HS - Gym 1 - Scoreboard	20	2012	45	45		45	
Lewisville HS - Gym 2 - Flooring	40	2012	73	73		73	Sanded and Refinished 2020
Lewisville HS - Locker Rooms - Flooring	20	2012	45	45		45	Epoxy
Lewisville HS - Locker Rooms - Benches	50	2012	78	78		78	Concrete
Lewisville HS - Locker Rooms - Lockers	40	2012	73	73		73	
Lewisville HS - Locker Rooms - Partitions	20	2012	45	45		45	CMU
STADIUM							
Lewisville HS - Stadium Bleachers	50	1971	-4	35		16	Homeside underneath/structure painted 2018; Visitor 2019
Lewisville HS - Stadium Bleachers Addition	50	1982	18	35		27	
Lewisville HS - Stadium Artificial Turf	8	2020	63	63		63	
Lewisville HS - Stadium Synthetic Track	10	2012	-10	15		3	minor fading; Summer 2022 repairs
Lewisville HS - Stadium PA System		2021				-	Tracking Replacement Yr only - In Technology Dept. Plans
Lewisville HS - Stadium Light poles	30	2009	53	53		53	Poles only 2009, due to storm damage
Lewisville HS - Stadium Scoreboard	18	2003	-11	5		-3	Fair Play
Lewisville HS - Stadium Pressbox HVAC	20	2021	90	90		90	
Lewisville HS - Stadium Pressbox Roof	30	2021	93	93		93	
Lewisville HS - Stadium Pressbox Flooring	15	2021	87	87		87	Carpet tiles and tile
Lewisville HS - Stadium Ticket Booth(s)	20	2021	90	90		90	
Lewisville HS - Stadium Concession - Home - HVAC	20	2021	90	90		90	
Lewisville HS - Stadium Concession - Home - Roof	20	2021	90	90		90	
Lewisville HS - Stadium Concession - Visitor - HVAC	20	2021	90	90		90	
Lewisville HS - Stadium Concession - Visitor - Roof	20	2021	90	90		90	
Lewisville HS - Stadium Restrooms- Home	20	2021	90	90		90	
Lewisville HS - Stadium Restrooms - Visitor	20	2021	90	90		90	
Lewisville HS - Stadium Band Tower	50	2023	100	100		100	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Lewisville HS - Lightning Detection		2023					Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
Lewisville HS - Field House 2010 - HVAC	20	2010	35	35		35	
Lewisville HS - Field House 2010 - Roof - Metal	30	2010	57	57		57	
Lewisville HS - Field House 2010 - Electrical Panels	30	2010	57	57		57	
Lewisville HS - Field House 2010 - Fire Safety - Alarm System	20	2010	35	35		35	Tied into Main Bldg, Warning detection devices only
Lewisville HS - Field House 2010 - Fire Safety - Sprinkler System	50	2010	74	74		74	
Lewisville HS - Field House 2010 - Flooring - Carpet	15	2010	13	13		13	Offices
Lewisville HS - Field House 2010 - Flooring - Epoxy	20	2010	35	35		35	
Lewisville HS - Field House 2010 - Flooring - Concrete/Terrazzo	50	2010	74	74		74	
Lewisville HS - Field House 2010 - Restrooms	20	2010	35	40		38	CMU partitions, ceramic tile
Lewisville HS - Field House 2010 - Restrooms - Coaches	20	2010	35	35		35	Ceramic tile
Lewisville HS - Field House 2010 - Lockers	40	2010	68	68		68	
Lewisville HS - Field House 2010 - Benches	50	2010	74	74		74	Concrete
Lewisville HS - Field House 2010 - Paint	15	2017	60	60		60	
Lewisville HS - Field House 2010 - Exterior Lighting	20	2010	35	35		35	Wall Packs
Wrestling Building & Trainers Rm - 2021							
Lewisville HS - Wrestling & Trainers 2021 - HVAC	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Roof - Flat	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Electrical Panels	30	2021	93	93		93	
Lewisville HS - Wrestling & Trainers 2021 - Fire Safety - Alarm System	20	2021	90	90		90	Tied into Main Bldg, Warning detection devices only
Lewisville HS - Wrestling & Trainers 2021 - Fire Safety - Sprinkler System	50	2021	96	96		96	
Lewisville HS - Wrestling & Trainers 2021 - Flooring - Girls Wrestling -Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 -Girls Wrestling - Benches	50	2021	96	96		96	Concrete
Lewisville HS - Wrestling & Trainers 2021 - Girls Restroom	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 -Girls Wrestling - Locker	40	2021	95	95		95	
Lewisville HS - Wrestling & Trainers 2021 - Boys Restrooms	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Flooring - Boys Wrestling- Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Flooring - Boys Wrestling- Benches	50	2021	96	96		96	Concrete
Lewisville HS - Wrestling & Trainers 2021 -Boys Wrestling - Locker	40	2021	95	95		95	
Lewisville HS - Wrestling & Trainers 2021 - Trainers Rm Flooring - RAF	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Wrestling Room	20	2021	90	90		90	Concrete & VCT
Lewisville HS - Wrestling & Trainers 2021 - Paint	20	2021	90	90		90	
Lewisville HS - Wrestling & Trainers 2021 - Paint - Exterior	20	2021	90	90		90	
INDOOR ATHLETIC CENTER 1996							
Lewisville HS - IAC 1996 - HVAC	20	1996	-35	10		-13	Heaters only; offices have split systems
Lewisville HS - IAC 1996 - Roof - Metal	30	1996	10	10		10	
Lewisville HS - IAC 1996 - Electrical Panels	30	1996	10	10		10	
Lewisville HS - IAC 1996 - Fire Safety - Alarm System	-					-	
Lewisville HS - IAC 1996 - Fire Safety - Sprinkler System	-					-	
Lewisville HS - IAC 1996 - Turf	15	2008	0	10		5	Some turf removed to create a weight room
Lewisville HS - IAC 1996 - Girls Weight Room - Flooring	20	2013	50	50		50	
Lewisville HS - IAC 1996 - Paint	15	2017	60	60		60	Interior lower walls painted 2018
Lewisville HS - IAC 1996 - Paint - Exterior	20	2021	90	90		90	
WEIGHT ROOM 2003							
Lewisville HS - Weight Room 2003 - HVAC	20	2003	0	0		0	Trane Condensing units replaced 2021

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Lewisville HS - Weight Room 2003 - Roof - Metal	30	2003	33	33		33	
Lewisville HS - Weight Room 2003 - Electrical Panels	30	2003	33	33		33	New LED lights 2022
Lewisville HS - Weight Room 2003 - Fire Safety - Alarm System	-					-	
Lewisville HS - Weight Room 2003 - Fire Safety - Sprinkler System	-					-	
Lewisville HS - Weight Room 2003 - Flooring - Rubber	20	2021	90	90		90	
Lewisville HS - Weight Room 2003 - Paint	15	2021	87	87		87	
BOYS TRACK 2003							
Lewisville HS - Boys Track - HVAC	20	2003	0	5		3	
Lewisville HS - Boys Track - Roof - Flat	20	2003	0	5		3	
Lewisville HS - Boys Track - Electrical Panels	30	2003	33	33		33	
Lewisville HS - Boys Track - Fire Safety - Alarm System	-					-	
Lewisville HS - Boys Track - Fire Safety - Sprinkler System	-					-	
Lewisville HS - Boys Track - Flooring - Epoxy	20	2003	0	10		5	
Lewisville HS - Boys Track - Restroom	20	2003	0	10		5	Solid plastic, ceramic tile floor/walls
Lewisville HS - Boys Track - Lockers	40	2003	50	40		45	
Lewisville HS - Boys Track - Benches	20	2009	30	0		15	Epoxy
Lewisville HS - Boys Track - Paint	15	2021	87	87		87	
Lewisville HS - Boys Track - Paint - Exterior	20	2021	90	90		90	
CC, GOLF, G SOCCER & BASEBALL 2021							
Lewisville HS - CC, Golf, G Soccer & Baseball - HVAC	20	2021	90	90		90	
Lewisville HS - CC, Golf, G Soccer & Baseball - Roof - Metal	30	2021	93	93		93	
Lewisville HS - CC, Golf, G Soccer & Baseball - Electrical Panels	30	2021	93	93		93	
Lewisville HS - CC, Golf, G Soccer & Baseball- Fire Safety - Alarm System	20	2021	90	90		90	Tied into Main Bldg, Warning detection devices only
Lewisville HS - CC, Golf, G Soccer & Baseball- Fire Safety - Sprinkler System	50	2021	96	96		96	
Lewisville HS - Girls Soccer - Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Girls Soccer - Restroom	20	2021	90	90		90	
Lewisville HS - Girls Soccer - Lockers	40	2021	95	95		95	
Lewisville HS - Girls Soccer - Benches	50	2021	96	96		96	
Lewisville HS - Girls CC - Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Girls CC - Restroom	20	2021	90	90		90	
Lewisville HS - Girls CC - Lockers	40	2021	95	95		95	
Lewisville HS - Girls CC - Benches	50	2021	96	96		96	concrete
Lewisville HS - Boys CC - Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Boys CC - Restroom	20	2021	90	90		90	
Lewisville HS - Boys CC - Lockers	40	2021	95	95		95	
Lewisville HS - Boys CC - Benches	50	2021	96	96		96	concrete
Lewisville HS - Baseball - Flooring - Epoxy	20	2021	90	90		90	
Lewisville HS - Baseball - Restroom	20	2021	90	90		90	
Lewisville HS - Baseball - Lockers	40	2021	95	95		95	
Lewisville HS - Baseball - Benches	50	2021	96	96		96	concrete
Lewisville HS - Offices - Flooring - Carpet	15	2021	87	87		87	
Lewisville HS - CC, Golf, G Soccer & Baseball - Paint	20	2021	90	90		90	
BASEBALL FIELD 1978							
Lewisville HS - Baseball Field Bleachers	40	2003	50	50		50	
Lewisville HS - Baseball Field Restrooms	20	2008	25	20		23	
Lewisville HS - Baseball Field Backstop Netting	15	2010	13	5		9	Major wear along top & bottom; needs replacement

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Lewisville HS - Baseball Field Scoreboard	20	2005	10	10		10	Daktronics
Lewisville HS - Baseball Field Pressbox	20	2021	90	90		90	
Lewisville HS - Baseball Field Dugout Paint	15	2017	60	60		60	
Lewisville HS - Baseball Field Lightpoles	30	1991	-7	10		2	
Lewisville HS - Baseball Field Leveling	4	2022	75	75		75	
Lewisville HS - Baseball Field Batting Cages	20	2012	45	45		45	Athletics is replacing turf 2023
Lewisville HS - Baseball Field Concession	20	2003	0	0		0	

Marcus HS

Year Built / Age 1981 / 42

Campus Square Footage 624,467

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1981**	**16**				
MAIN CAMPUS							
Marcus HS - HVAC - Original	**20**	**2005**	10	10	-2%	**10**	**MIX**
Marcus HS - HVAC - 1988 Addition	**20**	**2005**	10	10	-2%	**10**	
Marcus HS - HVAC - 1989 Addition	**20**	**2005**	10	10	-2%	**10**	**SWING**
Marcus HS - HVAC - 1997 Addition	**20**	**1997**	-30	0	-2%	**-15**	**RTU**
Marcus HS - HVAC - 2000 Addition	**20**	**2000**	-15	0	-2%	**-8**	**W-wing; RTU**
Marcus HS - HVAC - 2008 Addition	**20**	**2008**	25	20	-2%	**22**	**Gym; RTU**
Marcus HS - HVAC - 2014 Addition	**20**	**2014**	55	55	-2%	**54**	**M.A.C.; RTU**
Marcus HS - HVAC - Controls	**20**	**2005**	10	10		**10**	**Controls = Alerton**
Marcus HS - Ceiling and Lights - Original	**20**	**2005**	10	10		**10**	**MIX**
Marcus HS - Ceiling and Lights - 2000 Addition	**20**	**2000**	-15	10		**-3**	**W-wing**
Marcus HS - Ceiling and Lights - 2008 Addition	**20**	**2008**	25	25		**25**	**Gym**
Marcus HS - Ceiling and Lights - 2014 Addition	**20**	**2014**	55	55		**55**	**M.A.C.**
Marcus HS - Roof - Flat - Original	**20**	**2020**	85	85	-9%	**78**	**2017 Storm damage**
Marcus HS - Roof - Flat - 1988 Addition	**20**	**2020**	85	85	-9%	**78**	S-Wing; 2017 Storm damage
Marcus HS - Roof - Flat - 1989 Addition	**20**	**2020**	85	85	-9%	**78**	Auditorium; 2017 Storm damage -**IN PROGRESS**
Marcus HS - Roof - Flat - 1993 Replacement	**20**	**2020**	85	85	-9%	**78**	Original Cafeteria, small gym, band hall; **2017 Storm damage**
Marcus HS - Roof - Flat - 1997 Addition	**20**	**2020**	85	85	-9%	**78**	Middle gym; **2017 Storm damage**
Marcus HS - Roof - Flat - 2000 Addition	**20**	**2020**	85	85	-9%	**78**	Cafeteria expansion, W-wing; 2017 Storm damage
Marcus HS - Roof - Flat - 2008 Addition	**20**	**2020**	85	85	-9%	**78**	Fine Arts; **2017 Storm damage**
Marcus HS - Roof - Flat - 2008 Replacement	**20**	**2020**	85	85	-9%	**78**	Library, Front porch, new gym; 2017 Storm damage
Marcus HS - Roof - Flat - 2010 Replacement	**20**	**2020**	85	85	-9%	**78**	Athletic Area; 2017 Storm damage
Marcus HS - Roof - Flat - 2012 Replacements	**20**	**2020**	85	85	-9%	**78**	Original building areas; 2017 Storm damage
Marcus HS - Roof - Flat - 2014 Addition	**20**	**2020**	85	85	-9%	**78**	M.A.C., Black box; **2017 Storm damage**
Marcus HS - Electrical Switchgear - Original	**30**	**2020**	90	90		**90**	
Marcus HS - Electrical Panels - 1983 Addition	**30**	**2020**	90	90		**90**	
Marcus HS - Electrical Panels - 1988 Addition	**30**	**2020**	90	90		**90**	
Marcus HS - Electrical Panels - 1989 Addition	**30**	**2020**	90	90		**90**	
Marcus HS - Electrical Panels - 2000 Addition	**30**	**2000**	23	23	-4%	**22**	**W-wing**
Marcus HS - Electrical Panels - 2008 Addition	**30**	**2008**	50	50	-4%	**48**	**Fine Arts**
Marcus HS - Electrical Panels - 2014 Addition	**30**	**2014**	70	70	-4%	**70**	**Black box, M.A.C.**
Marcus HS - Elevator #1 (D Hall/Main Office)	**25**	**2010**	48	48	16%	**56**	**Elevator Controls (installed 1970 - Altered in 2010)**
Marcus HS - Elevator #2 (West Wing)	**25**	**1999**	4	10	11%	**8**	**Montgomery**
Marcus HS - Elevator #3 (Arena)	**25**	**2014**	64	64	-6%	**60**	**TKE**
Marcus HS - Elevator #4 (Stadium)	**25**	**2010**	48	40	7%	**47**	**Schindler**
Marcus HS - Lift (Baseball Press Box)	**-**					**-**	**Removed 7/2019**
Marcus HS - Fire Safety - Fire Alarm	**20**	**2014**	55	50	-2%	**51**	**NFS2-3030E**
Marcus HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
Marcus HS - Fire Safety - Sprinkler System - Original	**50**	**1989**	32	32	0%	**32**	**Auditorium**
Marcus HS - Fire Safety - Sprinkler Sys - 2000 Addition	**50**	**2000**	54	54	0%	**54**	**W-wing**
Marcus HS - Fire Safety - Sprinkler Sys - 2005 Addition	**50**	**2005**	64	64	0%	**64**	**All other areas**
Marcus HS - Fire Safety - Sprinkler Sys - 2008 Addition	**50**	**2008**	70	70	0%	**70**	**Fine Arts**
Marcus HS - Fire Safety - Sprinkler Sys - 2014 Addition	**50**	**2014**	82	82	0%	**82**	**Black box, M.A.C.**
Marcus HS - Food Service Boilers	**20**	**2014**	55	55		**55**	**Tank 2014**
Marcus HS - Food Service Freezers	**20**	**2008**	25	25		**25**	
Marcus HS - Generator	**-**					**-**	
Marcus HS - Flooring - Classrooms - Carpet	**15**	**2019**	73	73		**73**	Carpet
Marcus HS - Flooring - Classrooms - VCT	**20**	**2019**	80	80		**80**	VCT
Marcus HS - Flooring - Classrooms - VCT	**20**	**2009**	30	30		**30**	**VCT**
Marcus HS - Flooring - Corridors	**20**	**2009**	30	30		**30**	**VCT**
Marcus HS - Flooring - Library	**15**	**2012**	27	20		**23**	**Carpet Squares**
Marcus HS - Flooring - Principal Offices	**15**	**2018**	67	67		**67**	**Carpet**
Marcus HS - Flooring - Office	**20**	**2012**	45	45		**45**	**VCT**
Marcus HS - Flooring - Counselor Office	**15**	**2019**	73	73		**73**	**Carpet**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Marcus HS - Flooring - Cafeteria	50	1984	22	22		22	Terrazzo
Marcus HS - Flooring - Kitchen	50	1984	22	22		22	Terrazzo
Marcus HS - Flooring - Band	20	2012	45	45		45	VCT
Marcus HS - Flooring - Choir	20	2019	80	80		80	VCT
Marcus HS - Flooring - Orchestra	20	2012	45	45		45	VCT
Marcus HS - Plastic Laminate	40	2013	75	75		75	
Marcus HS - Doors	20	2019	80	80		80	
Marcus HS - Door Hardware	20	2019	80	80		80	
Marcus HS - Casework (Built-Ins)	20	1981	-110	0		-55	
Marcus HS - Restrooms - Faculty	20	2020	85	85		85	
Marcus HS - Restrooms - Student	20	2012	45	45		45	
Marcus HS - Restrooms - 1989 Addition	20	2019	80	80		80	Auditorium
Marcus HS - Restrooms - 2000 Addition	20	2000	-15	5		-5	
Marcus HS - Restrooms - 2008 Addition	20	2008	25	25		25	
Marcus HS - Restrooms - 2014 Addition	20	2014	55	55		55	
Marcus HS - Marquee	30	2019	87	80		83	Monument sign only w/lighting
Marcus HS - Paving - Parking Lots	50	2010	74	74		74	
Marcus HS - Paving - Parking Lots	50	2013	80	80		80	
Marcus HS - Paving - Parking Lots	50	2014	82	82		82	Concrete, NE corner lot and front lot. Area includes 2010 lots.
Marcus HS - Paving - Parking Lots	50	2018	90	90		90	
Marcus HS - Paving - Parking Lots	50	2019	92	92		92	
Marcus HS - Paving - Sidewalks	40	1989	15	15		15	
Marcus HS - Paving - Sidewalks	40	2013	75	75		75	
Marcus HS - Exterior Lighting	20	2017	70	70		70	LED
Marcus HS - Exterior Windows - 1981 Original	40	1981	-5	5		0	Vinyl Windows
Marcus HS - Paint - Commons	15	2019	73	73		73	
Marcus HS - Paint - Cafeteria	15	2019	73	73		73	
Marcus HS - Paint - Auditorium	20	2018	75	73		74	
Marcus HS - Paint - M.A.C.	15	2014	40	40		40	
Marcus HS - Paint - Gyms	20	2002	-5	10		3	
Marcus HS - Paint - Exterior	20	2015	60	50		55	Washed and Sealed 2018; Exterior window trim & atrium windows painted 2021
Marcus HS - Paint - Hallways	20	2012	45	45		45	Upper wall only touch ups
Marcus HS - Auditorium Curtains	20	2018	75	75		75	All soft curtains replaced 2018
Marcus HS - Auditorium Stage Lighting	25	2018	80	80		80	
Marcus HS - Auditorium Sound		2014				-	Tracking Replacement Yr only - In Technology Dept. Plans
Marcus HS - Auditorium Seating	20	2018	75	75		75	
Marcus HS - Auditorium Flooring	15	2018	67	67		67	
Marcus HS - M.A.C. - Flooring	40	2014	78	78		78	Wood; Sanding & Refinishing 2022
Marcus HS - M.A.C. - Bleachers	30	2014	70	70		70	Retractable (only 10%)
Marcus HS - M.A.C. - Restrooms	20	2014	55	55		55	
Marcus HS - M.A.C. - Scoreboard	20	2014	55	55		55	Spectrum Wireless - LED
Marcus HS - M.A.C. - Locker Room Flooring	20	2014	55	55		55	Epoxy
Marcus HS - M.A.C. - Locker Room Benches	50	2014	82	82		82	Concrete
Marcus HS - M.A.C. - Locker Room Lockers	40	2014	78	78		78	
Marcus HS - 1981 Gym - Flooring	40	1981	-5	10		3	Small (Silver) gym; needs sanding
Marcus HS - 1981 Gym - Bleachers	30	1981	-40	5		-18	Retractable, small gym
Marcus HS - 1981 Gym - Scoreboard	-					-	
Marcus HS - 1997 Middle Gym - Flooring	40	1997	35	35		35	Red gym; needs sanding
Marcus HS - 1997 Middle Gym - Bleachers	30	1997	13	13		13	
Marcus HS - 1997 Middle Gym - Scoreboard	20	2016	65	65		65	Wired LED
Marcus HS - 2008 Large Gym - Flooring	40	2008	63	63		63	Maurader gym; needs sanding
Marcus HS - 2008 Large Gym - Bleachers	30	2009	53	53		53	
Marcus HS - 2008 Large Gym - Scoreboard	20	2008	25	25		25	Wireless - LED
Marcus HS - Locker Rooms - Flooring	20	2008	25	25		25	Epoxy
Marcus HS - Locker Rooms - Benches	50	2008	70	70		70	Concrete
Marcus HS - Locker Rooms - Partitions	20	2008	25	25		25	Solid plastic
STADIUM 2010							
Marcus HS - Stadium Bleachers	40	2010	68	68		68	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Marcus HS - Stadium Artificial Turf	8	2018	38	38		38	
Marcus HS - Stadium Synthetic Track	10	2018	50	50		50	
Marcus HS - Stadium PA System		2012				-	Tracking Replacement Yr only - In Technology Dept. Plans
Marcus HS - Stadium Light poles	30	2010	57	57		57	
Marcus HS - Stadium Scoreboard	18	2010	28	28		28	Wired LED; Fairplay; wireless play clocks
Marcus HS - Stadium Pressbox HVAC	20	2010	35	35		35	
Marcus HS - Stadium Pressbox Roof	20	2010	35	35		35	Mod Bit
Marcus HS - Stadium Pressbox Flooring	15	2010	13	13		13	Carpet; interior painted 2018
Marcus HS - Stadium Ticket Booth(s)	20	2010	35	35		35	
Marcus HS - Stadium Concession - Home - HVAC	-					-	
Marcus HS - Stadium Concession - Home - Roof	20	2010	35	45		40	Under Bleachers
Marcus HS - Stadium Concession - Home - Flooring	20	2010	35	35		35	VCT
Marcus HS - Stadium Concession - Visitor - HVAC	-					-	
Marcus HS - Stadium Concession - Visitor - Roof	20	2010	35	45		40	Under Bleachers
Marcus HS - Stadium Concession - Home - Flooring	20	2010	35	35		35	VCT
Marcus HS - Stadium Restrooms - Home	20	2010	35	35		35	Concrete
Marcus HS - Stadium Restrooms - Visitor	20	2010	35	35		35	Concrete
Marcus HS - Stadium Band Tower	50	2023	100	100		100	
Marcus HS - Lightning Detection		2023					Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
Marcus HS - Field House HVAC	20	2010	35	35		35	
Marcus HS - Field House Roof - Metal	30	2010	57	57		57	
Marcus HS - Field House Electrical Panels	30	2010	57	57		57	
Marcus HS - Field House Fire Safety - Alarm System	20	2010	35	35		35	Edwards IQ - has own account; tied to stadium
Marcus HS - Field House Fire Safety - Sprinkler System	50	2010	74	74		74	
Marcus HS - Field House Flooring - Carpet	15	2010	13	13		13	Office
Marcus HS - Field House Flooring - Epoxy	20	2010	35	35		35	
Marcus HS - Field House Flooring - Concrete/Terrazzo	50	2010	74	74		74	
Marcus HS - Field House Restrooms	20	2010	35	30		33	Concrete
Marcus HS - Field House Restrooms - Coaches	20	2010	35	35		35	
Marcus HS - Field House Lockers	40	2010	68	60		64	
Marcus HS - Field House Benches	50	2010	74	74		74	Concrete
Marcus HS - Field House Paint	20	2017	70	70		70	
Marcus HS - Field House Exterior Lighting	20	2010	35	35		35	
INDOOR ATHLETIC CENTER 2013							
Marcus HS - IAC HVAC	20	2013	50	40		45	
Marcus HS - IAC Roof - Metal	30	2013	67	67		67	
Marcus HS - IAC Electrical Panels	30	2013	67	67		67	
Marcus HS - IAC Fire Safety - Alarm System	20	2013	50	50		50	Edwards IQ - has own account; stand alone
Marcus HS - IAC Fire Safety - Sprinkler System	50	2013	80	80		80	
Marcus HS - IAC Turf	15	2013	33	25		29	Showing some wear
Marcus HS - IAC Paint	20	2019	80	80		80	
Marcus HS - IAC Paint - Exterior	20	2013	50	50		50	
Marcus HS - IAC Weight room flooring	20	2023	100	100		100	Athletics replaced flooring Summer 2023
ROBOTICS 1982							
Marcus HS - Robotics HVAC	20	2007	20	20		20	
Marcus HS - Robotics HVAC - Shop	20	2022	95	95		95	30 ton AAON RTU
Marcus HS - Robotics Roof	20	2020	85	85		85	4 PLY; Original building areas;
Marcus HS - Robotics Flooring - Classrooms	20	2015	60	60		60	VCT; interior painted 2017
Marcus HS - Robotics Flooring - Shop	20	2022	95	95		95	Rubber
SPORTS COMPLEX 2009							**DIXON ROAD**
Marcus HS - Sports Complex Parking Lots	50	2012	78	78		78	
Marcus HS - Sports Complex Exterior Lights	20	2012	45	40		43	Needs LED upgrade
BASEBALL FIELD 2009							
Marcus HS - Baseball Field Bleachers	40	2009	65	65		65	
Marcus HS - Baseball Field Backstop Netting	15	2009	7	10		8	Minor repairs in 2019, 2021 & 2022; showing major wear on top & bottom of net.
Marcus HS - Baseball Field Scoreboard	20	2009	30	30		30	Wireless - LED; Spectrum

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Marcus HS - Baseball Field Pressbox	20	2007	20	20		20	Brought from main campus
Marcus HS - Baseball Field Dugout Paint	15	2009	7	7		7	
Marcus HS - Baseball Field Light poles	30	2009	53	53		53	needs relamped
Marcus HS - Baseball Field Field Leveling	4	2021	50	50		50	Field gets a lot of use out of season.
Marcus HS - Baseball Field Batting Cage	20	2009	30	30		30	New nets covered cage; Athletics is replacing turf 2023
Locker Rooms / Restrooms / Concession							
Marcus HS - Baseball Field Locker/Restroom/Concession HVAC	20	2009	30	30		30	Controls = Alerton
Marcus HS - Baseball Field Locker/Restroom/Concession Roof - Metal	30	2009	53	53		53	
Marcus HS - Baseball Field Locker/Restroom/Concession Flooring	20	2009	30	5		18	Epoxy & Concrete
Marcus HS - Baseball Field Locker Rm & Lockers	20	2009	30	30		30	Needs Expansion
SOFTBALL FIELD 2012							
Marcus HS - Softball Field Bleachers	40	2012	73	73		73	
Marcus HS - Softball Field Backstop Netting	15	2012	27	27		27	Minor repairs in 2020
Marcus HS - Softball Field Scoreboard	20	2012	45	45		45	LED wireless; Spectrum
Marcus HS - Softball Field Pressbox	20	2012	45	45		45	
Marcus HS - Softball Field Dugout Paint	15	2012	27	20		23	Boosters have maintained
Marcus HS - Softball Field Light poles	30	2012	63	63		63	
Marcus HS - Softball Field Leveling	4	2021	50	50		50	
Marcus HS - Softball Field Batting Cage	20	2012	45	45		45	Replaced nets 2021
Marcus HS - Softball Field Concession	20	2012	45	45		45	
Locker Rooms / Restrooms / Concession							
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession HVAC	20	2012	45	45		45	
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession Roof - Metal	30	2012	63	63		63	
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession Flooring	20	2012	45	45		45	Epoxy
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession Flooring	20	2012	45	45		45	VCT
Marcus HS - Softball/Tennis Field Locker/Restroom/Concession Lockers	20	2012	45	45		45	
TENNIS COURTS 2014							
Marcus HS - Tennis Courts	50	2012	78	78		78	12 courts; some concrete cracking and chipping on side walls
Marcus HS - Tennis Courts Resurfaced	10	2012	-10	0		-5	Showing wear
Marcus HS - Tennis Courts Light Poles	30	2012	63	63		63	12 Light poles - Musco
Marcus HS - Tennis Courts Shade Structure	20	2012	45	45		45	

The Colony HS

Year Built / Age 1986 / 37

Campus Square Footage 482,651

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1986**	**26**				
MAIN CAMPUS							
The Colony HS - HVAC - Original	**20**	**2005**	10	10	-8%	**9**	**MIX; 2019 2 New Boilers installed**
The Colony HS - HVAC - 1987 Addition	**20**	**2005**	10	10	-8%	**9**	**H Hall; Big Gym; Ag; Old Football Locker Rm**
The Colony HS - HVAC - 1989 Addition	**20**	**2005**	10	10	-8%	**9**	**J Hall; Auditorium**
The Colony HS - HVAC - 2002 Addition	**20**	**2002**	-5	10	-8%	**3**	**K-wing, 2002 Percussion**
The Colony HS - HVAC - 2003 Addition	**20**	**2003**	0	10	-8%	**5**	**Varsity Gym and locker rooms**
The Colony HS - HVAC - 2008 Addition	**20**	**2009**	30	20	-8%	**23**	**2009 Band partial**
The Colony HS - HVAC - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box Addition**
The Colony HS - HVAC - 2024 Addition							**Activities Center - In Progress**
The Colony HS - HVAC - Controls	**20**	**2005**	10	10		**10**	**Controls = Alerton**
The Colony HS - Ceiling and Lights - Original	**20**	**2005**	10	10		**10**	**MIX**
The Colony HS - Ceiling and Lights - 1987 Addition	**20**	**2005**	10	10		**10**	
The Colony HS - Ceiling and Lights - 1989 Addition	**20**	**2005**	10	10		**10**	
The Colony HS - Ceiling and Lights - 2002 Addition	**20**	**2002**	-5	5		**0**	**K-wing, 2002 Band**
The Colony HS - Ceiling and Lights - 2003 Addition	**20**	**2003**	0	5		**3**	**Varsity Gym and locker rooms**
The Colony HS - Ceiling and Lights - 2008 Addition	**20**	**2009**	30	30		**30**	**2009 Band**
The Colony HS - Ceiling and Lights - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box Addition**
The Colony HS - Ceiling and Lights - 2024 Addition							**Activities Center - In Progress**
The Colony HS - Roof - Flat - Original	**20**	**2010**	35	35	-50%	**18**	**Small Gym replaced 2015**
The Colony HS - Roof - Flat - 1987 Addition	**20**	**2001**	-10	0	-50%	**-8**	**Big Gym replaced 2015**
The Colony HS - Roof - Flat - 1989 Addition	**20**	**2001**	-10	0	-50%	**-8**	**Auditorium replaced 2015**
The Colony HS - Roof - Flat - 2002 Addition	**20**	**2002**	-5	0	-50%	**-4**	**K Wing & Percussion**
The Colony HS - Roof - Flat - 2003 Addition	**20**	**2003**	0	0	-50%	**0**	**Competition Gym**
The Colony HS - Roof - Flat - 2008 Addition	**20**	**2008**	25	25	-50%	**13**	**Band**
The Colony HS - Roof - Flat - 2022 Addition	**20**	**2022**	95	95		**95**	**Black Box Addition**
The Colony HS - Roof - Flat - 2024 Addition							**Activities Center - In Progress**
The Colony HS - Electrical Switchgear - Original	**30**	**2009**	53	53	8%	**57**	**Main Switch Gear 2009; Original Panels**
The Colony HS - Electrical Panels - 1987 Addition	**30**	**2009**	53	53	8%	**57**	**Main Switch Gear 2009; Original Panels**
The Colony HS - Electrical Panels - 1989 Addition	**30**	**2009**	53	53	8%	**57**	**Main Switch Gear 2009; Original Panels**
The Colony HS - Electrical Panels - 2002 Addition	**30**	**2002**	30	30	8%	**32**	
The Colony HS - Electrical Panels - 2003 Addition	**30**	**2003**	33	33	8%	**36**	
The Colony HS - Electrical Panels - 2008 Addition	**30**	**2008**	50	50	8%	**54**	
The Colony HS - Electrical Panels - 2022 Addition	**30**	**2022**	97	97		**97**	**Black Box Addition**
The Colony HS - Electrical Panels - 2024 Addition							**Activities Center - In Progress**
The Colony HS - Elevator #1 (Main)	**25**	**2020**	88	88	18%	**100**	**Refurbished; Elevator Controls**
The Colony HS - Elevator #2 (Stadium)	**25**	**1995**				**0**	**IN PROGRESS**
The Colony HS - Lift (Baseball Press Box)	**-**					**-**	**Removed 7/2019**
The Colony HS - Fire Safety - Fire Alarm	**20**	**2000**	-15	5	4%	**-5**	**Edwards EST 3**
The Colony HS - Fire Safety - ERRS		**2021**				**-**	**Tracking Only**
The Colony HS - Fire Safety - Sprinkler System	**50**	**2005**	64	64	10%	**71**	
The Colony HS - Fire Safety - Sprinkler System - 2022 Add	**50**	**2022**	98	98		**98**	
The Colony HS - Storm Shelter - 2022 Add	**50**	**2022**	98	98		**98**	**Black Box Addition**
The Colony HS - Food Service Boilers	**20**	**2018**	75	75		**75**	
The Colony HS - Food Service Freezers	**20**	**2008**	25	25		**25**	
The Colony HS - Food Service Freezers - Cougar Cafe	**20**	**2009**	30	30		**30**	
The Colony HS - Generator	**40**	**2007**	60	60		**60**	**Generac - Natural Gas; 100 KW**
The Colony HS - Lift Station							**Activities Center - In Progress**
The Colony HS - Flooring - Classrooms - VCT	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Classrooms - VCT	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Classrooms - VCT	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Classrooms - VCT	**20**	**2009**	30	30		**30**	**VCT**
The Colony HS - Flooring - Corridors	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Library	**15**	**2010**	13	13		**13**	**Carpet; Lees**
The Colony HS - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
The Colony HS - Flooring - Cafeteria / Commons	**20**	**2013**	50	50		**50**	**LVT**
The Colony HS - Flooring - Kitchen	**50**	**1986**	26	26		**26**	**CT**
The Colony HS - Flooring - Band	**20**	**2009**	30	30		**30**	**VCT**
The Colony HS - Flooring - Choir	**20**	**2020**	85	85		**85**	**VCT**
The Colony HS - Flooring - Orchestra	**20**	**2003**	0	0		**0**	**VCT**
The Colony HS - Flooring - 2022 Black Box Addition	**20**	**2022**	95	95		**95**	**VCT**

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
The Colony HS - Plastic Laminate	40	2013	75	75		75	
The Colony HS - Doors	20	2021	90	90		90	
The Colony HS - Door Hardware	20	2021	90	90		90	
The Colony HS - Casework (Built-Ins)	20	2021	90	90		90	
The Colony HS - Restrooms - Faculty	20	2013	50	50		50	
The Colony HS - Restrooms - Student	20	2013	50	60		55	CMU partitions
The Colony HS - Restrooms - 1987 Addition	20	2013	50	50		50	Old Football Locker room
The Colony HS - Restrooms - 2002 Addition	20	2002	-5	5		0	K Wing
The Colony HS - Restrooms - 2003 Addition	20	2003	0	5		3	Varsity Gym Locker Rooms
The Colony HS - Restrooms - Auditorium	20	2018	75	75		75	
The Colony HS - Marquee	15	2016	53	53		53	2016 Replaced LED; Digital
The Colony HS - Paving - Parking Lots	50	1986	26	26		26	Concrete
The Colony HS - Paving - Parking Lots	20	2012	45	35		40	Asphalt
The Colony HS - Paving - Parking Lots	50	2013	80	80		80	Concrete
The Colony HS - Paving - Sidewalks	40	1986	8	20		14	Concrete
The Colony HS - Exterior Lighting	20	2019	80	80		80	LED
The Colony HS - Exterior Windows - 1986 Original	40	1986	8	8		8	Vinyl
The Colony HS - Paint - Commons	15	2013	33	33		33	PLAM to 7 ft; maintained paint 2019
The Colony HS - Paint - Cafeteria	15	2021	87	87		87	
The Colony HS - Paint - Auditorium	15	2018	67	67		67	
The Colony HS - Paint - Gyms	15	2005	-20	10		-5	Small and medium gym
The Colony HS - Paint - Gyms	20	2010	35	35		35	Varsity gym
The Colony HS - Paint - Exterior	20	2010	35	35		35	New doors & Rails 2017
The Colony HS - Paint - Hallways	20	2014	55	55		55	
The Colony HS - Auditorium Curtains	20	2018	75	75		75	2008 Bond
The Colony HS - Auditorium Stage Lighting	25	2018	80	80		80	2008 Bond
The Colony HS - Auditorium Sound		2015				-	Tracking Replacement Yr only - In Technology Dept. Plans
The Colony HS - Auditorium Seating	20	2018	75	75		75	2008 Bond
The Colony HS - Auditorium Flooring	15	2018	67	67		67	2008 Bond
The Colony HS - 1986 North Gym - Flooring	40	1986	8	8		8	Wood
The Colony HS - 1987 Middle Gym - Flooring	40	1987	10	10		10	Wood
The Colony HS - 1987 Middle Gym - Bleachers	30	1987	-20	0		-10	
The Colony HS - 2003 Varsity Gym - Flooring	40	2003	50	50		50	Varsity; Sanded and Painted 2016 (2nd sanding)
The Colony HS - 2003 Varsity Gym - Bleachers	30	2003	33	33		33	
The Colony HS - Locker Rooms - Flooring	20	2012	45	45		45	Epoxy
The Colony HS - Locker Rooms - Benches	20	2013	50	50		50	Linex
The Colony HS - Locker Rooms - Partitions	20	2012	45	45		45	Solid plastic
STADIUM 1986							
The Colony HS - Stadium Bleachers	40	1986	8	20		14	
The Colony HS - Stadium Artificial Turf	8	2021	75	75		75	
The Colony HS - Stadium Synthetic Track	10	2012	-10	15		3	Repainted 2018; fading coating but looks good overall
The Colony HS - Stadium PA System		2013				-	Tracking Replacement Yr only - In Technology Dept. Plans
The Colony HS - Stadium Light poles	30	2010	57	57		57	
The Colony HS - Stadium Scoreboard	18	2003	-11	5		-3	
The Colony HS - Stadium Pressbox HVAC	20	2023				0	IN PROGRESS
The Colony HS - Stadium Pressbox Roof	20	2023				0	IN PROGRESS
The Colony HS - Stadium Pressbox Flooring	15	2023				0	IN PROGRESS
The Colony HS - Stadium Ticket Booth(s)	20	2023				0	IN PROGRESS
The Colony HS - Stadium Concession - Home - HVAC	20	2024				0	IN PROGRESS
The Colony HS - Stadium Concession - Home - Roof	20	2024				0	IN PROGRESS
The Colony HS - Stadium Concession - Home - Flooring	20	2024				0	IN PROGRESS
The Colony HS - Stadium Concession / Locker Room - Visitor - HVAC	20	2019	80	80		80	
The Colony HS - Stadium Concession / Locker Room - Visitor - Roof	20	2019	80	80		80	
The Colony HS - Stadium Restrooms - Home	20	2004	5	5		5	Painted 2017
The Colony HS - Stadium Restrooms - Visitor	20	2004	5	5		5	Painted 2017
The Colony HS - Stadium Restrooms - North End	20	2018				0	IN PROGRESS
The Colony HS - Stadium Band Tower	50	2023	100	100		100	
The Colony HS - Lightning Detection		2023					Tracking Only - Maintained by Athletics
FIELD HOUSE - 2010							
The Colony HS - Field House HVAC	20	2010	35	35		35	
The Colony HS - Field House Roof - Metal	30	2010	57	57		57	
The Colony HS - Field House Electrical Panels	30	2010	57	57		57	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
The Colony HS - Field House Fire Safety - Alarm System	20	2010	35	35		35	Tied into Main Bldg, Warning detection devices only
The Colony HS - Field House Fire Safety - Sprinkler System	50	2010	74	74		74	
The Colony HS - Field House Flooring - Carpet	15	2010	13	13		13	
The Colony HS - Field House Flooring - Epoxy	20	2010	35	35		35	
The Colony HS - Field House Flooring - Concrete/Terrazzo	50	2010	74	74		74	
The Colony HS - Field House Restrooms	20	2010	35	35		35	
The Colony HS - Field House Restrooms - Coaches	20	2010	35	35		35	
The Colony HS - Field House Lockers	40	2010	68	68		68	
The Colony HS - Field House Benches	50	2010	74	74		74	Concrete
The Colony HS - Field House Paint	15	2017	60	60		60	
The Colony HS - Field House Exterior Lighting	20	2010	35	35		35	
INDOOR ATHLETIC CENTER 1995							
The Colony HS - IAC HVAC	20	2018	75	75		75	Heat only
The Colony HS - IAC Roof - Metal	30	1995	7	10		8	
The Colony HS - IAC Electrical Panels	30	1995	7	7		7	
The Colony HS - IAC Fire Safety - Alarm System	-					-	
The Colony HS - IAC Fire Safety - Sprinkler System	-					-	
The Colony HS - IAC Artificial Turf	15	2010	13	13		13	
The Colony HS - IAC Flooring - Girls Soccer	20	2018	75	75		75	
The Colony HS - IAC Lockers - Girls Soccer	40	2018	88	88		88	
The Colony HS - IAC Paint	20	2017	70	70		70	
The Colony HS - IAC Paint - Exterior	20	1995	-40	10		-15	
WEIGHT ROOM 2003							
The Colony HS - Weight Room HVAC	20	2018	75	75		75	
The Colony HS - Weight Room Roof - Metal	30	2003	33	33		33	
The Colony HS - Weight Room Electrical Panels	30	2003	33	33		33	
The Colony HS - Weight Room Fire Safety - Alarm System	-					-	
The Colony HS - Weight Room Fire Safety - Sprinkler System	-					-	
The Colony HS - Weight Room Flooring - Rubber	20	2023	100	100		100	Athletics replaced flooring Summer 2023
The Colony HS - Weight Room Paint	20	2018	75	75		75	
TC.A.C. 2024							
Hebron HS - H.A.C. - Fire Safety - Alarm System	20						IN PROGRESS
Hebron HS - H.A.C. - HVAC	20						IN PROGRESS
Hebron HS - H.A.C. - Roof - Flat	20						IN PROGRESS
Hebron HS - H.A.C. - Electrical Panels	30						IN PROGRESS
Hebron HS - H.A.C. - Fire Safety - Sprinkler System	50						IN PROGRESS
Hebron HS - H.A.C. - Gym Flooring	40						IN PROGRESS
Hebron HS - H.A.C. - Bleachers	30						IN PROGRESS
Hebron HS - H.A.C. - Restrooms	20						IN PROGRESS
Hebron HS - H.A.C. - Scoreboard	20						IN PROGRESS
Hebron HS - H.A.C. - Locker Room Flooring	20						IN PROGRESS
Hebron HS - H.A.C. - Locker Room Benches	50						IN PROGRESS
Hebron HS - H.A.C. - Locker Room Lockers	40						IN PROGRESS
BASEBALL FIELD 1987							
The Colony HS - Baseball Field Bleachers	40	1991	20	20		20	
The Colony HS - Baseball Field Restrooms	-					-	See Stadium Concession/Locker Room Visitor 1988
The Colony HS - Baseball Field Backstop Netting	15	2010	13	13		13	Considerable repairs in 2017; Minor repairs in 2019 & 2022
The Colony HS - Baseball Field Scoreboard	20	2015	60	60		60	Spectrum
The Colony HS - Baseball Field Pressbox	20	1997	-30	5		-13	IN PROGRESS
The Colony HS - Baseball Field Dugout Paint	20	2015	60	60		60	
The Colony HS - Baseball Field Light poles	30	1991	-7	5		-1	
The Colony HS - Baseball Field Field Leveling	4	2022	75	75		75	
The Colony HS - Baseball Field Batting Cages	20	2012	45	45		45	Athletics is replacing turf 2023
The Colony HS - Baseball Field Locker Room	-					-	See Stadium Concession/Locker Room Visitor 1988
The Colony HS - Baseball Concession Stand	20	1997	-30	10		-10	
SOFTBALL FIELD 2019							
The Colony HS - Softball Field Bleachers	40	2019	90	90		90	
The Colony HS - Softball Field Restrooms	20	2019	80	80		80	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
The Colony HS - Softball Field Backstop Netting	15	2019	73	73		73	Repairs made in 2021 & 2022
The Colony HS - Softball Field Scoreboard	20	2015	60	60		60	
The Colony HS - Softball Field Pressbox	20	2019	80	80		80	
The Colony HS - Softball Field Dugout Paint	20	2019	80	80		80	
The Colony HS - Softball Field Light poles	30	2019	87	87		87	
The Colony HS - Softball Artificial Turf	8	2019	50	50		50	Good Shape; in 2023 Bond
The Colony HS - Softball Field Batting Cages	20	2019	80	80		80	
The Colony HS - Softball Field Locker Room	20	2019	80	80		80	
TENNIS COURTS 1986							
The Colony HS - Tennis Courts - West	50	1986	26	26		26	4 Courts
The Colony HS - Tennis Courts - West Resurfaced	10	2013	0	0		0	Showing some wear; fencing in bad shape
The Colony HS - Tennis Courts - West Light Poles	30	2010	57	50		53	9 poles for 4 courts; some dark spots
The Colony HS - Tennis Courts - East	50	1994	42	42		42	4 Courts - minor repairs to courts 2022
The Colony HS - Tennis Courts - East Resurfaced	10	2013	0	0		0	Showing wear.
The Colony HS - Tennis Courts - Shade Structure	20	2013	50	50		50	

ASSESSMENT SUMMARY
EXTRA-CURRICULAR

Current Year 2023

	AG BARN	AQUATIC CENTER EAST	AQUATIC CENTER WEST	LEWISVILLE LEARNING CENTER	LISDOLA	Student Success Center @ College St.	TECC - EAST	TECC - WEST
Year Built	2010	2006	2014	2001	2021	1960	2010	2020
Age	13	17	9	22	2	63	13	3
Foundation	-	-	-	-	-	0	-	-
HVAC - Original	41	8	26	-2	86	93	38	100
HVAC - Addition	55	-	-	34		93	-	-
HVAC - Controls	-	15	55	-3	90	90	35	85
Roof - Flat	-	15	-	-4	100	24	-	-
Roof - Flat Addition	-	-	-	17	-	-	-	-
Roof - Shingled	-	-	-	-	-	-	-	-
Roof - Metal	68	-	64	-	-	-	-	-
Roof - Standing Seam	-	-	-	-	-	93	67	100
Electrical Panels - Original	43	43	65	22	100	93	58	100
Electrical Panels - Addition	70	-	-	43	-	-	-	-
Elevator #1	-	-	26	27	-	-	56	100
Elevator #2	-	-	-	20	-	-	-	-
Fire Safety - Fire Alarm	28	17	25	-2	90	90	36	100
Fire Safety - Sprinkler System	-	33	41	61	96	96	83	100
Food Service Boilers	-	-	-	-	-	90	-	-
Food Service Freezers	-	-	-	-	-	90	-	-
Generator	-	-	78	-	-	-	68	93
Flooring - Classrooms	-	15	82	-3	-	90	74	94
Flooring - Classrooms - Additions	-	-	-	30	-	-	-	94
Flooring - Corridors	-	66	82	-3	-	90	74	80
Flooring - Library	-	-	-	-	-	-	-	-
Flooring - Office	-	15	55	-21	-	87	13	-
Flooring - Cafeteria	-	-	-	-3	-	90	-	-
Flooring - Kitchen	-	-	-	56	-	90	-	-
Flooring - Gym	-	-	-	-	-	68	-	-
Flooring - Band	-	-	-	-	-	-	-	-
Flooring - Choir	-	-	-	-	-	-	-	-
Flooring - Weight Room	-	15	-	-	-	-	-	-
Flooring - Concrete	72	-	-	-	96	-	-	-
Plastic Laminate	-	-	-	45	95	95	68	93
Doors	35	15	55	-3	90	90	35	85
Door Hardware	35	13	100	-3	90	90	35	85
Casework (Built Ins)	-	15	55	-3	90	90	35	85
Restrooms - Faculty	-	-	-	-	-	90	-	85
Restrooms - Student	-	-	-	-	-	90	-	85
Restrooms - Men's	35	13	55	-3	90	-	35	-
Restrooms - Women's	35	13	55	-3	90	-	35	-
Marquee	-	-	-	60	-	-	93	80
Paving - Parking Lots	74	66	82	56	96	90	74	94
Paving - Sidewalks	68	58	78	45	95	95	68	93
Exterior Lighting	35	15	55	90	90	90	90	85
Paint - Commons	13	47	67	73	87	87	33	80
Paint - Gym	-	-	-	65	-	90	-	-
Paint - Exterior	35	15	55	65	90	90	35	85

	AG BARN	AQUATIC CENTER EAST	AQUATIC CENTER WEST	LEWISVILLE LEARNING CENTER	LISDOLA	Student Success Center @ College St.	TECC - EAST	TECC - WEST
Paint - Hallways	-	-	-	65	-	90	35	85
Dust Collector	-	-	-	-	-	-	-	85
Sports and Fine Arts	-	-	-	-	-	-	-	-
Perf Arts - Curtains	-	-	-	-	-	-	-	-
Perf Arts - PA System	-	-	-	-	-	-	-	-
Perf Arts - Cafetorium Lighting	-	-	-	-	-	-	-	-
Track	-	-	-	-	-	-	-	-
Field Lights	-	-	-	-	-	-	-	-
Bleachers - Exterior	-	-	-	-	-	-	-	-
Bleachers - Interior	-	66	82	-	-	-	-	-
Gym Main - Flooring	-	-	-	-	-	-	-	-
Gym Auxiliary - Flooring	-	-	-	-	-	-	-	-
Boys Locker Rooms - Flooring	-	15	55	-	-	-	-	-
Girls Locker Rooms - Flooring	-	15	55	-	-	-	-	-
Boys Locker Rooms - Lockers	-	15	55	-	-	-	-	-
Girls Locker Rooms - Lockers	-	15	55	-	-	-	-	-
Boys Locker Rooms - Benches	-	66	82	-	-	-	-	-
Girls Locker Rooms - Benches	-	66	82	-	-	-	-	-
Gym - Partitions	-	-	-	-	-	-	-	-
Pool Plaster	-	23	40	-	-	-	-	-
Scoreboard	-	-7	38	-	-	-	-	-

Agriculture Barn

Year Built / Age 2010 / 13

Campus Square Footage 19,081

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2010**	**74**				
Agriculture Barn - HVAC - Original	**20**	**2010**	35	35	18%	**41**	**split system; Contols = n/a**
Agriculture Barn - HVAC - 2014 Addition	**20**	**2014**	55	55		**55**	**Pig Barn: heaters and 1 split system**
Agriculture Barn - Ceiling and Lights - Original	**20**	**2021**	90	90		**90**	**Pig barn LED lights 2022; Cattle Barn LED lights 2021**
Agriculture Barn - Roof - Metal	**30**	**2010**	57	57	20%	**68**	
Agriculture Barn - Roof - Metal - 2020 Addition	**30**	**2020**	90	90	20%	**90**	
Agriculture Barn - Electrical Switchgear - Original	**30**	**2010**	57	57	-24%	**43**	
Agriculture Barn - Electrical Panels - 2014 Addition	**30**	**2014**	70	70		**70**	**Pig Barn**
Agriculture Barn - Electrical Panels - 2020 Addition	**30**	**2020**	90	90		**90**	
Agriculture Barn - Fire Safety - Fire Alarm	**20**	**2010**	35	35	-20%	**28**	**Edwards EST IO64**
Agriculture Barn - Fire Safety - ERRS	**-**					**-**	
Agriculture Barn - Fire Safety - Sprinkler System	**-**					**-**	**N/A**
Agriculture Barn - Generator	**-**					**-**	
Agriculture Barn - Flooring - Concrete	**50**	**2010**	74	70		**72**	**Concrete**
Agriculture Barn - Doors	**20**	**2010**	35	35		**35**	
Agriculture Barn - Door Hardware	**20**	**2010**	35	35		**35**	
Agriculture Barn - Restrooms - Men	**20**	**2010**	35	35		**35**	**Concrete**
Agriculture Barn - Restrooms - Women	**20**	**2010**	35	35		**35**	**Concrete**
Agriculture Barn - Marquee	**-**					**-**	
Agriculture Barn - Paving - Parking Lots	**50**	**2010**	74	74		**74**	**Concrete**
Agriculture Barn - Paving - Sidewalks	**40**	**2010**	68	68		**68**	
Agriculture Barn - Exterior Lighting	**20**	**2010**	35	35		**35**	
Agriculture Barn - Paint - Commons areas	**15**	**2010**	13	13		**13**	
Agriculture Barn - Paint - Exterior	**20**	**2010**	35	35		**35**	

Aquatic Center East

Year Built / Age 2006 / 17

Campus Square Footage 38,871

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2006**	**66**				
Aquatic Cntr East - HVAC	**20**	**2006**	15	15	-50%	**8**	**DECTRON UNITS; boiler replaced 2021**
Aquatic Cntr East - HVAC - Controls	**20**	**2006**	15	15		**15**	**Controls = Alerton**
Aquatic Cntr East - Ceiling and Lights	**20**	**2006**	15	15		**15**	
Aquatic Cntr East -LED Lights over Pool	**20**	**2019**	80	70		**75**	
Aquatic Cntr East - Roof - Flat	**20**	**2006**	15	15	-2%	**15**	**Modified Bitumen**
Aquatic Cntr East - Electrical Switchgear	**30**	**2006**	43	43	0%	**43**	
Aquatic Cntr East - Fire Safety - Fire Alarm	**20**	**2006**	15	15	16%	**17**	**Edwards EST 3**
Aquatic Cntr East - Fire Safety - ERRS	-					-	
Aquatic Cntr East - Fire Safety - Sprinkler System	**50**	**2006**	66	66	-50%	**33**	
Aquatic Cntr East - Generator	-					-	
Aquatic Cntr East - Flooring - Classrooms	**20**	**2006**	15	15		**15**	**VCT**
Aquatic Cntr East - Flooring - Corridors	**50**	**2006**	66	66		**66**	**Concrete**
Aquatic Cntr East - Flooring - Office	**20**	**2006**	15	15		**15**	**VCT**
Aquatic Cntr East - Flooring - Weight Room	**20**	**2006**	15	15		**15**	**Rubber**
Aquatic Cntr East - Doors	**20**	**2006**	15	15		**15**	
Aquatic Cntr East - Door Hardware	**20**	**2006**	15	10		**13**	
Aquatic Cntr East - Casework (Built-Ins)	**20**	**2006**	15	15		**15**	
Aquatic Cntr East - Restrooms - Men's	**20**	**2006**	15	10		**13**	**CT**
Aquatic Cntr East - Restrooms - Women's	**20**	**2006**	15	10		**13**	**CT**
Aquatic Cntr East - Marquee	-					-	
Aquatic Cntr East - Paving - Parking Lots	**50**	**2006**	66	66		**66**	
Aquatic Cntr East - Paving - 2022 Parking Lot	**50**	**2022**	98	98		**98**	**105 spaces**
Aquatic Cntr East - Paving - Sidewalks	**40**	**2006**	58	58		**58**	
Aquatic Cntr East - Exterior Lighting	**20**	**2006**	15	15		**15**	**46 light poles LED; wall packs LED 2021**
Aquatic Cntr East - Exterior Lighting - 2022 Parking Lot	**20**	**2022**	95	95		**95**	**7 LED**
Aquatic Cntr East - Paint - Commons	**15**	**2015**	47	47		**47**	**Lower areas painted in 2019**
Aquatic Cntr East - Paint - Exterior	**20**	**2006**	15	15		**15**	**Maintaining**
Aquatic Cntr East - Bleachers - Interior	**50**	**2006**	66	66		**66**	**Concrete / Aluminum**
Aquatic Cntr East - Boys Locker Rooms - Flooring	**20**	**2006**	15	15		**15**	**Ceramic tile 12x12**
Aquatic Cntr East - Girls Locker Rooms - Flooring	**20**	**2006**	15	15		**15**	**Ceramic tile 12x12**
Aquatic Cntr East - Boys Locker Rooms - Lockers	**20**	**2006**	15	15		**15**	**Phenolic**
Aquatic Cntr East - Girls Locker Rooms - Lockers	**20**	**2006**	15	15		**15**	**Phenolic**
Aquatic Cntr East - Boys Locker Rooms - Benches	**50**	**2006**	66	66		**66**	**Concrete**
Aquatic Cntr East - Girls Locker Rooms - Benches	**50**	**2006**	66	66		**66**	**Concrete**
Aquatic Cntr East - Pool Plaster	**10**	**2016**	30	15		**23**	**Replaced 2016; Rust**
Aquatic Cntr East - Scoreboard	**15**	**2006**	-13	0		**-7**	

Aquatic Center West

Year Built / Age 2014 / 9

Campus Square Footage 59,000

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2014**	**82**				
Aquatic Cntr West - HVAC	**20**	**2014**	55	50	-50%	**26**	**DECTRON UNITS; CO2 tank replaced 2022**
Aquatic Cntr West - HVAC	**20**	**2023**	100	100		**100**	**MAU for Events**
Aquatic Cntr West - HVAC - Controls	**20**	**2014**	55	55		**55**	**Controls = Alerton**
Aquatic Cntr West - Ceiling and Lights	**20**	**2014**	55	55		**55**	
Aquatic Cntr West -LED Lights over Pool	**20**	**2016**	65	55		**60**	
Aquatic Cntr West - Roof - Metal	**30**	**2014**	70	70	-9%	**64**	
Aquatic Cntr West - Electrical Switchgear	**30**	**2014**	70	60	0%	**65**	
Aquatic Cntr West - Elevator	**25**	**2014**	64	40	-50%	**26**	**Thyssen Krupp- Cab Reno 2023**
Aquatic Cntr West - Fire Safety - Fire Alarm	**10**	**2019**	60	40	-50%	**25**	**Honeywell Farenhyt IFP-300**
Aquatic Cntr West - Fire Safety - ERRS	**-**					**-**	
Aquatic Cntr West - Fire Safety - Sprinkler System	**50**	**2014**	82	82	-50%	**41**	
Aquatic Cntr West - Evacuator	**20**	**2023**	100	100		**100**	
Aquatic Cntr West - Generator	**40**	**2014**	78	78		**78**	**Cummins - Diesel; 100 KW**
Aquatic Cntr West - Flooring - Corridors	**50**	**2014**	82	82		**82**	**Concrete**
Aquatic Cntr West - Flooring - Offices	**50**	**2014**	82	82		**82**	**Concrete**
Aquatic Cntr West - Flooring - Weight Room	**20**	**2014**	55	55		**55**	**Rubber**
Aquatic Cntr West - Doors	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Door Hardware	**20**	**2023**	100	100		**100**	
Aquatic Cntr West - Casework (Built-Ins)	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Restrooms - Men's	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Restrooms - Women's	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Marquee	**-**					**-**	**shared with TECC W**
Aquatic Cntr West - Paving - Parking Lots	**50**	**2014**	82	82		**82**	
Aquatic Cntr West - Paving - Sidewalks	**40**	**2014**	78	78		**78**	
Aquatic Cntr West - Exterior Lighting	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Paint - Commons	**15**	**2018**	67	67		**67**	**Lower areas in 2019 & 2023**
Aquatic Cntr West - Paint - Exterior	**20**	**2014**	55	55		**55**	
Aquatic Cntr West - Bleachers - Interior	**50**	**2014**	82	82		**82**	**Concrete / Aluminum**
Aquatic Cntr West - Boys Locker Rooms - Flooring	**20**	**2014**	55	55		**55**	**Epoxy**
Aquatic Cntr West - Girls Locker Rooms - Flooring	**20**	**2014**	55	55		**55**	**Epoxy; walls painted 2018**
Aquatic Cntr West - Boys Locker Rooms - Lockers	**20**	**2014**	55	55		**55**	**walls painted 2018; New Locker Hardware 2022**
Aquatic Cntr West - Girls Locker Rooms - Lockers	**20**	**2014**	55	55		**55**	**New Locker Hardware 2022**
Aquatic Cntr West - Boys Locker Rooms - Benches	**50**	**2014**	82	82		**82**	**concrete**
Aquatic Cntr West - Girls Locker Rooms - Benches	**50**	**2014**	82	82		**82**	**concrete**
Aquatic Cntr West - Large Pool Liners	**15**	**2014**	40	40		**40**	
Aquatic Cntr West - Small Pool Liners	**15**	**2014**	40	15		**28**	**Faded**
Aquatic Cntr West - Bulkheads Surfacing	**15**	**2014**	40	15		**28**	
Aquatic Cntr West - Scoreboard	**15**	**2014**	40	35		**38**	

Lewisville Learning Center

Year Built / Age 2001 / 22

Campus Square Footage 61,203

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2001**	**56**				
Lewisville Learning Cntr - HVAC - Original	**20**	**2001**	-10	5	12%	**-2**	**RTU; address dry storage**
Lewisville Learning Cntr - HVAC - 2009 Addition	**20**	**2009**	30	30	12%	**34**	**RTU**
Lewisville Learning Cntr - HVAC - Controls	**20**	**2001**	-10	5		**-3**	**Controls = I/net**
Lewisville Learning Cntr - Ceiling and Lights - Original	**20**	**2001**	-10	5		**-3**	
Lewisville LC - Ceiling and Lights - 2009 Addition	**20**	**2009**	30	30		**30**	
Lewisville Learning Cntr - Roof - Flat - Original	**20**	**2001**	-10	5	-42%	**-4**	
Lewisville Learning Cntr - Roof - Flat - 2009 Addition	**20**	**2009**	30	30	-42%	**17**	
Lewisville Learning Cntr - Electrical Switchgear - Original	**30**	**2001**	27	27	-19%	**22**	
Lewisville Learning Cntr - Electrical Panels - 2009 Addition	**30**	**2009**	53	53	-19%	**43**	
Lewisville Learning Cntr - Elevator #1	**25**	**2001**	12	10	6%	**12**	**Thyssen Krupp**
Lewisville Learning Cntr - Elevator #2 (2009 addition)	**25**	**2009**	44	35	9%	**43**	**Dover**
Lewisville Learning Cntr - Fire Safety - Fire Alarm	**20**	**2001**	-10	5	6%	**-2**	**Edwards EST 2 - Limited Parts**
Lewisville Learning Cntr - Fire Safety - ERRS	**-**					**-**	
Lewisville Learning Cntr - Fire Safety - Sprinkler System	**50**	**2001**	56	56	9%	**61**	
Lewisville Learning Cntr - Food Service Boilers	**-**					**-**	
Lewisville Learning Cntr - Food Service Freezers	**-**					**-**	**2 small reach-ins**
Lewisville Learning Cntr - Generator	**-**					**-**	
Lewisville Learning Cntr - Flooring - Classrooms - Carpet	**15**	**2001**	-47	5		**-21**	
Lewisville Learning Cntr - Flooring - Classrooms - VCT	**20**	**2001**	-10	5		**-3**	**VCT**
Lewisville Learning Cntr - Flooring - Classrooms - VCT Addition	**20**	**2009**	30	30		**30**	**VCT**
Lewisville Learning Cntr - Flooring - Corridors	**20**	**2001**	-10	5		**-3**	**VCT**
Lewisville Learning Cntr - Flooring - Offices	**15**	**2001**	-47	5		**-21**	**Carpet**
Lewisville Learning Cntr - Flooring - Cafeteria	**20**	**2001**	-10	5		**-3**	**VCT**
Lewisville Learning Cntr - Flooring - Kitchen	**50**	**2001**	56	56		**56**	**Terrazzo**
Lewisville Learning Cntr - Plastic Laminate	**40**	**2001**	45	45		**45**	
Lewisville Learning Cntr - Doors	**20**	**2001**	-10	5		**-3**	**Light wood**
Lewisville Learning Cntr - Door Hardware	**20**	**2001**	-10	5		**-3**	
Lewisville Learning Cntr - Casework (Built-Ins)	**20**	**2001**	-10	5		**-3**	
Lewisville Learning Cntr - Restrooms - Faculty	**20**	**2001**	-10	5		**-3**	**Ceramic Tile**
Lewisville Learning Cntr - Restrooms - Student	**20**	**2001**	-10	5		**-3**	**Ceramic Tile**
Lewisville Learning Cntr - Restrooms - 2009 Additions	**20**	**2009**	30	20		**25**	
Lewisville Learning Cntr - Marquee	**30**	**2011**	60	60		**60**	
Lewisville Learning Cntr - Paving - Parking Lots	**50**	**2001**	56	56		**56**	
Lewisville Learning Cntr - Paving - Sidewalks	**40**	**2001**	45	45		**45**	
Lewisville Learning Cntr - Exterior Lighting	**30**	**2020**	90	90		**90**	**LED**
Lewisville Learning Cntr - Paint - Commons	**15**	**2019**	73	73		**73**	
Lewisville Learning Cntr - Paint - Gyms	**20**	**2016**	65	65		**65**	
Lewisville Learning Cntr - Paint - Exterior	**20**	**2016**	65	65		**65**	
Lewisville Learning Cntr - Paint - Hallways	**20**	**2016**	65	65		**65**	

LISDOLA

Year Built / Age 2021 / 2

Campus Square Footage 5,458

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2010**	**74**				
LISDOLA - HVAC - Original	**20**	**2021**	90	90	-4%	**86**	
LISDOLA - HVAC Controls	**20**	**2021**	90	90		**90**	**Entouch/Reliable**
LISDOLA - Ceiling and Lights - Original	**20**	**2021**	90	90		**90**	
LISDOLA - Roof - Flat	**20**	**2021**	90	90	20%	**100**	
LISDOLA - Electrical Switchgear - Original	**30**	**2021**	93	93	18%	**100**	
LISDOLA - Fire Safety - Fire Alarm	**20**	**2021**	90	90		**90**	
LISDOLA - Fire Safety - ERRS	-					-	
LISDOLA - Fire Safety - Sprinkler System	**50**	**2021**	96	96		**96**	
LISDOLA - Storm Shelter	**50**	**2021**					
LISDOLA - Lightning Detection		**2023**					**Tracking Only - Maintained by Athletics**
LISDOLA - Generator	-	-				-	
LISDOLA- Inverter	**10**	**2021**	80	80		**80**	
LISDOLA- Inverter Batteries	**5**	**2021**	60	60		**60**	
LISDOLA - Flooring - Concrete	**50**	**2021**	96	96		**96**	
LISDOLA - Plastic Laminate	**40**	**2021**	95	95		**95**	
LISDOLA - Doors	**20**	**2021**	90	90		**90**	
LISDOLA - Door Hardware	**20**	**2021**	90	90		**90**	
LISDOLA - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	
LISDOLA - Restrooms - Men	**20**	**2021**	90	90		**90**	
LISDOLA - Restrooms - Women	**20**	**2021**	90	90		**90**	
LISDOLA - Marquee	-					-	
LISDOLA - Paving - Parking Lots	**50**	**2021**	96	96		**96**	
LISDOLA - Paving - Sidewalks	**40**	**2021**	95	95		**95**	
LISDOLA - Exterior Lighting	**20**	**2021**	90	90		**90**	
LISDOLA - Paint - Commons areas	**15**	**2021**	87	87		**87**	
LISDOLA - Paint - Exterior	**20**	**2021**	90	90		**90**	

Student Success Center @ College St.

Year Built / Age 1960 / 63

Campus Square Footage 35,601

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1960**	**-26**				
Student Success Ctr CS - Foundation	**50**	**1960**					**Slab-On-Grade**
Student Success Ctr CS - HVAC - Original	**20**	**2021**	90	90	4%	**93**	**RTU; Aaon; 2021 - 2 mini splits added**
Student Success Ctr CS - HVAC - 1989 Addition	**20**	**2021**	90	90	4%	**93**	**RTU; AAon**
Student Success Ctr CS - HVAC - Controls	**20**	**2021**	90	90		**90**	**Controls = Alerton**
Student Success Ctr CS - Ceiling and Lights - Original	**20**	**2021**	90	90		**90**	**LED**
Student Success Ctr CS - Ceiling and Lights - 1989	**20**	**2021**	90	90		**90**	**LED**
Student Success Ctr CS - Roof - Flat	**20**	**2008**	25	25	-5%	**24**	
Student Success Ctr CS - Roof - Standing Seam	**30**	**2021**	93	93		**93**	**Mod Bit**
Student Success Ctr CS - Electrical Switchgear	**30**	**2021**	93	93		**93**	**Square D**
Student Success Ctr CS - Fire Safety - Fire Alarm	**20**	**2021**	90	90		**90**	**EST 3**
Student Success Ctr CS - Fire Safety - ERRS	**-**	**2021**				**-**	**Tracking Only**
Student Success Ctr CS - Fire Safety - Sprinkler System	**50**	**2021**	96	96		**96**	
Student Success Ctr CS - Food Service Boilers	**20**	**2021**	90	90		**90**	
Student Success Ctr CS - Food Service Freezers	**20**	**2021**	90	90		**90**	**Reach-in cooler only**
Student Success Ctr CS - Generator	**40**	**2021**	95	95		**95**	**Cummins - Diesel; 40 KW**
Student Success Ctr CS - Shade Structure - Main	**20**	**2011**	40	40		**40**	
Student Success Ctr CS - Playground - Main	**20**	**2005**	10	10		**10**	**new swing chains 2021**
Student Success Ctr CS - Shade Structure - Pre-K	**-**					**-**	
Student Success Ctr CS - Playground - Pre-K	**-**					**-**	
Student Success Ctr CS - Perf Arts - Curtains	**-**					**-**	
Student Success Ctr CS - Perf Arts - Stage Lghtng/panel	**-**					**-**	
Student Success Ctr CS - Flooring - Classrooms	**20**	**2021**	90	90		**90**	**VCT**
Student Success Ctr CS - Flooring - Corridors	**20**	**2021**	90	90		**90**	**VCT**
Student Success Ctr CS - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet**
Student Success Ctr CS - Flooring - Cafeteria	**20**	**2021**	90	90		**90**	**VCT**
Student Success Ctr CS - Flooring - Kitchen	**20**	**2021**	90	90		**90**	**Epoxy**
Student Success Ctr CS - Flooring - Gym	**20**	**2021**	90	45		**68**	**LVT; issues with glue**
Student Success Ctr CS - Plastic Laminate	**40**	**2021**	95	95		**95**	
Student Success Ctr CS - Doors	**20**	**2021**	90	90		**90**	**Wood/Steel Store Front**
Student Success Ctr CS - Door Hardware	**20**	**2021**	90	90		**90**	
Student Success Ctr CS - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	**Laminate**
Student Success Ctr CS - Restrooms - Faculty	**20**	**2021**	90	90		**90**	**Ceramic tile, cmv wall; Plastic partitions**
Student Success Ctr CS - Restrooms - Student-Orgininal	**20**	**2021**	90	90		**90**	**FRP, ceramic floor, plastic partitions**
Student Success Ctr CS - Restrooms - 1989 Addition	**20**	**2021**	90	90		**90**	**New wing-laminate, floor urinals,**
Student Success Ctr CS - Marquee	**-**					**-**	
Student Success Ctr CS - Paving - Parking Lots	**20**	**2021**	90	90		**90**	**half Asphalt/half Concrete (2020) ; addition 2023**
Student Success Ctr CS - Paving - Sidewalks	**40**	**2021**	95	95		**95**	
Student Success Ctr CS - Exterior Lighting	**20**	**2021**	90	90		**90**	**LED**
Student Success Ctr CS - Paint - Commons	**15**	**2021**	87	87		**87**	
Student Success Ctr CS - Paint - Cafeteria	**15**	**2021**	87	87		**87**	
Student Success Ctr CS - Paint - Library	**15**	**2021**	87	87		**87**	
Student Success Ctr CS - Paint - Gyms	**20**	**2021**	90	90		**90**	**CMU with FRP - no pads;**
Student Success Ctr CS - Paint - Exterior	**20**	**2021**	90	90		**90**	
Student Success Ctr CS - Paint - Hallways	**20**	**2021**	90	90		**90**	**Original wing painted brick - new wing P-Lam, tack strips.**

Technology, Exploration and Career Center - East

Year Built / Age 2010 / 13

Campus Square Footage 95,168

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2010**	**74**				
TECC East - HVAC	**20**	**2010**	35	35	9%	**38**	**CHILLER**
TECC East - HVAC - 2024 Addition		**2024**					**In Progress**
TECC East - HVAC - Controls	**20**	**2010**	35	35		**35**	**Controls = Alerton (control)/Automated Logic (hardware)**
TECC East - Ceiling and Lights	**20**	**2010**	35	35		**35**	
TECC East - Ceiling and Lights - 2024 Addition		**2024**					**In Progress**
TECC East - Roof - Standing Seam	**30**	**2010**	57	57	19%	**67**	
TECC East - Roof - Standing Seam - 2024 Addition		**2024**					**In Progress**
TECC East - Electrical Switchgear	**30**	**2010**	57	57	1%	**58**	
TECC East - Elevator	**25**	**2010**	48	48	18%	**56**	**Schindler**
TECC East - Fire Safety - Fire Alarm	**20**	**2010**	35	35	2%	**36**	**Edwards Quickstart**
TECC East - Fire Safety - ERRS	**-**					**-**	
TECC East - Fire Safety - Sprinkler System	**50**	**2010**	74	74	12%	**83**	
TECC East - Generator	**40**	**2010**	68	68		**68**	**MTV Onsite Energy - Diesel; 200 KW**
TECC East - Flooring - Classrooms	**50**	**2010**	74	74		**74**	**Stained Concrete**
TECC East - Flooring - Corridors	**50**	**2010**	74	74		**74**	**Stained Concrete**
TECC East - Flooring - Offices	**15**	**2010**	13	13		**13**	**Carpet; Front office - VCT (2018)**
TECC East - Plastic Laminate	**40**	**2010**	68	68		**68**	
TECC East - Doors	**20**	**2010**	35	35		**35**	
TECC East - Door Hardware	**20**	**2010**	35	35		**35**	
TECC East - Casework (Built-Ins)	**20**	**2010**	35	35		**35**	
TECC East - Restrooms - Faculty	**20**	**2010**	35	35		**35**	**Ceramic Tile**
TECC East - Restrooms - Student	**20**	**2010**	35	35		**35**	**Ceramic Tile**
TECC East - Restrooms - Student - 2024 Addition		**2024**					**In Progress**
TECC East - Marquee	**30**	**2021**	93	93		**93**	**LED Digital**
TECC East - Paving - Parking Lots	**50**	**2010**	74	74		**74**	
TECC East - Paving - Sidewalks	**40**	**2010**	68	68		**68**	
TECC East - Exterior Lighting	**20**	**2021**	90	90		**90**	**Well Packs LED 2018; Parking LED 2021**
TECC East - Paint - Commons	**15**	**2013**	33	33		**33**	**Painted sections in 2019**
TECC East - Paint - Exterior	**20**	**2010**	35	35		**35**	
TECC East - Paint - Hallways	**20**	**2010**	35	35		**35**	**2018 painted where needed**

Technology, Exploration and Career Center - West

Year Built / Age 2020 / 3

Campus Square Footage 132,971

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2020**	**94**				
TECC West - HVAC	**20**	**2020**	85	85	19%	**100**	**AAON**
TECC West - HVAC - Controls	**20**	**2020**	85	85		**85**	**Alerton**
TECC West - Ceiling and Lights	**20**	**2020**	85	85		**85**	**LED**
TECC West - Roof - Standing Seam	**30**	**2020**	90	90	14%	**100**	**ModBit**
TECC West - Electrical Switchgear	**30**	**2020**	90	90	12%	**100**	**Squared D**
TECC West - Elevator	**25**	**2020**	88	88	20%	**100**	**Schindler**
TECC West - Fire Safety - Fire Alarm	**20**	**2020**	85	85	20%	**100**	**EST - 3**
TECC West - Fire Safety - ERRS	**-**	**2020**				**-**	**Tracking Only**
TECC West - Fire Safety - Sprinkler System	**50**	**2020**	94	94	20%	**100**	
TECC West - Storm Shelter	**50**	**2020**	94	94		**94**	
TECC West - Generator	**40**	**2020**	93	93		**93**	**Cummins - Diesel; 125-200 KW**
TECC West - Flooring - Classrooms	**50**	**2020**	94	94		**94**	**Concrete**
TECC West - Flooring - Corridors	**50**	**2020**	94	94		**94**	**Concrete**
TECC West - Flooring - Offices	**15**	**2020**	80	80		**80**	**Carpet**
TECC West - Plastic Laminate	**40**	**2020**	93	93		**93**	
TECC West - Doors	**20**	**2020**	85	85		**85**	
TECC West - Door Hardware	**20**	**2020**	85	85		**85**	
TECC West - Casework (Built-Ins)	**20**	**2020**	85	85		**85**	**Laminate & solid surface**
TECC West - Restrooms - Faculty	**20**	**2020**	85	85		**85**	
TECC West - Restrooms - Student	**20**	**2020**	85	85		**85**	
TECC West - Marquee	**15**	**2020**	80	80		**80**	**Digital shared with Aqua Ctr West**
TECC West - Paving - Parking Lots	**50**	**2020**	94	94		**94**	**Concrete**
TECC West - Paving - Sidewalks	**40**	**2020**	93	93		**93**	**Concrete**
TECC West - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
TECC West - Paint - Commons	**15**	**2020**	80	80		**80**	
TECC West - Paint - Exterior	**20**	**2020**	85	85		**85**	
TECC West - Paint - Hallways	**20**	**2020**	85	85		**85**	
TECC West - Dust Collector	**20**	**2020**	85	85		**85**	

ASSESSMENT SUMMARY

Administration

Current Year 2023

	Administration Center (LISDAC)	Assessment-Textbook	Facility Services Center	Purnell Transportation Center	The Colony Bus Barn
Year Built	2005	2009	1985	1979	2006
Age	18	14	38	44	17
HVAC	10	34	12	-33	8
HVAC Additions	74	-	11	-	-
HVAC - Controls	10	30	-	-33	-
HVAC - Controls Additions	75	-	90	-	-
Roof - Flat	10	-	5	-	-
Roof - Flat	-	-	-	-	-
Roof - Metal	-	53	-	51	42
Roof - Shingled	-	-	3	-	-
Electrical Panels	36	56	-	-20	22
Elevators	64	-	60	-	-
Fire Safety - Fire Alarm	60	33	-	49	12
Fire Safety - Sprinkler System	32	54	-	-	-
Food Service Boilers	-	-	-	-	-
Food Service Freezer	-	-	90	65	-
Food Service Freezer	-	-	96	65	-
Generator	75	-	-	-	-
Und. Storage Tanks - Fuel	-	-	-	-12	-
Abv. Storage Tanks - Fuel	-	-	90	-	66
Flooring - Offices	73	7	87	80	15
Flooring - Offices - West	-	-	-	-	-
Flooring - Board Room	60	-	-	-	-
Flooring - Meeting Room	87	-	-	-	-
Flooring - Corridors	10	30	90	80	-
Flooring - Corridors-West	-	-	87	-	-
Flooring - Work Rooms	10	72	-	-	-
Flooring - Break Rooms	10	30	90	-	15
Flooring - Commons	75	-	-	-	-
Flooring - Stairs	67	-	-	-	-
Flooring - Warehouse	-	-	-	12	-
Flooring - Concrete	-	-	93	-	-
Board Room Seating	87	-	-	-	-
Doors	13	30	90	-18	15
Door Hardware	10	30	90	-18	15
Casework (Built-Ins)	10	30	90	-18	15
Restrooms - Men's	10	30	-	-45	15
Restrooms - Women's	10	30	-	-45	15
Restrooms - Other Areas	-	-	50	90	-
Restrooms - Other Areas	-	-	-	90	-
Marquee / Signage	-	-	60	-	-
Paving - Parking Lots	24	-20	80	12	66
Paving - Sidewalks	55	30	5	-3	58
Exterior Lighting	80	53	85	90	43
Paint - Commons	67	7	87	93	80
Paint - Commons - Additions	67	-	-	-	-
Paint - Exterior	75	30	10	-45	15
NETWORK OPERATION CENTER	-	-	90	-	-
Liebert A/C	60	-	80	-	-
Uninterrupted Power Supply Battery Replacement	0	-	-	-	-

Administration - LISD Administrative Center

Year Built / Age 2005 / 18

Campus Square Footage 179,438

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2005**	**64**				
Admin LISDAC - HVAC	**20**	**2005**	10	10	-1%	**10**	**CHILLER 4 RTU**
Admin LISDAC - HVAC - Controls	**20**	**2005**	10	10		**10**	**Controls = Alerton**
Admin LISDAC - Ceiling and Lights	**20**	**2005**	10	10		**10**	
Admin LISDAC - Roof - Flat	**20**	**2010**	35	35	0%	**35**	
Admin LISDAC - Electrical Switchgear	**30**	**2005**	40	40	-9%	**36**	
Admin LISDAC - Elevator #1	**25**	**2021**	92	92	20%	**100**	**Schindler**
Admin LISDAC - Lift (behind stage)	**25**	**2005**	28	28		**28**	**W.L. Electric Screw Drive**
Admin LISDAC - Fire Safety - Fire Alarm	**20**	**2018**	75	75	-20%	**60**	**Edwards EST 3**
Admin LISDAC - Fire Safety - ERRS	**-**					**-**	
Admin LISDAC - Fire Safety - Sprinkler System	**50**	**2005**	64	64	-50%	**32**	**50 HP Pump**
Admin LISDAC - Generator	**40**	**2013**	75	75		**75**	**Cummins - Diesel; 500 KW**
Admin LISDAC - Flooring - Offices	**15**	**2019**	73	73		**73**	**Carpet Tiles**
Admin LISDAC - Flooring - Offices	**15**	**2017**	60	60		**60**	**Carpet Tiles**
Admin LISDAC - Flooring - Board Room	**15**	**2017**	60	60		**60**	**Carpet**
Admin LISDAC - Flooring - Counselor's Suite	**15**	**2021**	87	87		**87**	**Carpet; previously Room D**
Admin LISDAC - Flooring - Corridors	**20**	**2005**	10	10		**10**	**VCT**
Admin LISDAC - Flooring - Work Rooms	**20**	**2005**	10	10		**10**	**VCT**
Admin LISDAC - Flooring -Break Rooms	**20**	**2005**	10	10		**10**	**VCT**
Admin LISDAC - Flooring - Commons	**50**	**2005**	64	50		**57**	**Ceramic Tile**
Admin LISDAC - Flooring - Stairs	**50**	**2005**	64	60		**62**	**Terrazzo**
Admin LISDAC - Board Room Seating	**15**	**2021**	87	87		**87**	**reworked counter**
Admin LISDAC - Doors	**20**	**2005**	10	15		**13**	
Admin LISDAC - Door Hardware	**20**	**2005**	10	10		**10**	
Admin LISDAC - Casework (Built-Ins)	**20**	**2005**	10	10		**10**	**reworked built-ins**
Admin LISDAC - Restrooms - Men's (4)	**20**	**2005**	10	10		**10**	**Ceramic tile floor/walls to 4'. Solid plastic partition. Some areas repaired**
Admin LISDAC - Restrooms - Women's (4)	**20**	**2005**	10	10		**10**	**Ceramic tile floor/walls to 4'. Solid plastic partition.**
Admin LISDAC - Marquee / Signage	**-**					**-**	
Admin LISDAC - Paving - Parking Lots	**50**	**1985**	24	24		**24**	**Concrete**
Admin LISDAC - Paving - Sidewalks	**40**	**2005**	55	55		**55**	
Admin LISDAC - Exterior Lighting	**30**	**2017**	80	80		**80**	**LED Wall packs; LED parking lot lights**
Admin LISDAC - Paint - Commons Areas	**15**	**2018**	67	67		**67**	
Admin LISDAC - Paint - Exterior	**20**	**2018**	75	75		**75**	
NETWORK OPERATION CENTER							
Admin LISDAC - Liebert A/C	**20**	**2015**	60	60		**60**	
Admin LISDAC - Uninterrupted Power Supply Battery Replacement	**5**	**2018**					**Technology item - Tracking purposes only**
Welcome Center 2018							
Admin LISDAC - WC - HVAC	**20**	**2018**	75	75	-1%	**74**	**4 RTU**
Admin LISDAC - WC - HVAC - Controls	**20**	**2018**	75	75		**75**	**Controls = Alerton**
Admin LISDAC - WC - Ceiling and Lights	**20**	**2018**	75	75		**75**	
Admin LISDAC - WC - Roof - Flat	**20**	**2005**	10	10		**10**	
Admin LISDAC - WC - Fire Safety - Sprinkler System	**50**	**2018**	90	90	0%	**90**	**50 HP Pump**
Admin LISDAC - WC - Flooring - Commons	**20**	**2018**	75	75		**75**	**LVT**
Admin LISDAC - WC - Flooring	**15**	**2018**	67	67		**67**	**Carpet Tiles**
Admin LISDAC - WC - Doors	**20**	**2018**	75	75		**75**	
Admin LISDAC - WC - Door Hardware	**20**	**2018**	75	75		**75**	
Admin LISDAC - WC - Casework (Built-Ins)	**20**	**2018**	75	75		**75**	

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2008 Bond; Blue are 2023 Bond
Admin LISDAC - WC - Restrooms	20	2018	75	75		75	
Admin LISDAC - Paint - Commons Areas	15	2018	67	67		67	
Bolin/Prof. Learning Center 2020							
Admin LISDAC - Bolin - HVAC	20	2020	85	85		85	
Admin LISDAC - Bolin - HVAC - Controls	20	2020	85	85		85	
Admin LISDAC - Bolin - Ceiling and Lights	20	2020	85	85		85	
Admin LISDAC - Bolin - Roof - Flat	20	2020	85	85		85	
Admin LISDAC - Bolin - Fire Safety - Sprinkler System	50	2020	94	94		94	
Admin LISDAC - Bolin - Flooring - Commons	20	2020	85	85		85	
Admin LISDAC - Bolin - Flooring	15	2020	80	80		80	
Admin LISDAC - Bolin - Doors	20	2020	85	85		85	
Admin LISDAC - Bolin - Door Hardware	20	2020	85	85		85	
Admin LISDAC - Bolin - Casework (Built-Ins)	20	2020	85	85		85	
Admin LISDAC - Bolin - Restrooms	20	2020	85	85		85	
Admin LISDAC - Bolin - Paint - Commons Areas	15	2020	80	80		80	

Assessment / Textbook Warehouse

Year Built / Age Unknown, Purchased 2009 / 14

Campus Square Footage 59,000

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced
0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2009**	**72**				
Assessment / Txtbk Whse - HVAC	**20**	**2009**	30	30	15%	**34**	**RTU**
Assessment / Txtbk Whse - Ceiling and Lights	**20**	**2009**	30	30		**30**	
Assessment / Txtbk Whse - Roof - Metal	**30**	**2009**	53	53	0%	**53**	
Assessment / Txtbk Whse - Electrical Switchgear	**30**	**2009**	53	53	5%	**56**	
Assessment / Txtbk Whse - Fire Safety - Fire Alarm	**20**	**2009**	30	30	10%	**33**	**Edwards Quickstart**
Assessment / Txtbk Whse - Fire Safety - ERRS	-					-	
Assessment / Txtbk Whse - Fire Safety - Sprinkler System	**50**	**2009**	72	72	-25%	**54**	
Assessment / Txtbk Whse - Generator	-					-	
Assessment / Txtbk Whse - Flooring - Offices	**15**	**2009**	7	7		**7**	**Carpet**
Assessment / Txtbk Whse - Flooring - Corridors	**20**	**2009**	30	30		**30**	**VCT**
Assessment / Txtbk Whse - Flooring - Work Rooms	**50**	**2009**	72	72		**72**	**Stained concrete**
Assessment / Txtbk Whse - Flooring -Break Rooms	**20**	**2009**	30	30		**30**	**VCT**
Assessment / Txtbk Whse - Doors	**20**	**2009**	30	30		**30**	
Assessment / Txtbk Whse - Door Hardware	**20**	**2009**	30	30		**30**	
Assessment / Txtbk Whse - Casework (Built-Ins)	**20**	**2009**	30	30		**30**	
Assessment / Txtbk Whse - Restrooms - Men	**20**	**2009**	30	30		**30**	**Ceramic tile 2x2, 6x6 wall, plastic partitions**
Assessment / Txtbk Whse - Restrooms - Women	**20**	**2009**	30	30		**30**	**Ceramic tile 2x2, 6x6 wall, plastic partitions; Additional restroom added 2017**
Assessment / Txtbk Whse - Marquee / Signage	-					-	**Gate entrance lit**
Assessment / Txtbk Whse - Paving - Parking Lots	**20**	**1995**	-40	0		**-20**	**Asphalt; poor condition - needs repair**
Assessment / Txtbk Whse - Paving - Sidewalks	**40**	**1995**	30	30		**30**	
Assessment / Txtbk Whse - Exterior Lighting	**30**	**2009**	53	53		**53**	
Assessment / Txtbk Whse - Paint - Commons Areas	**15**	**2009**	7	7		**7**	**Hallways 2015**
Assessment / Txtbk Whse - Paint - Exterior	**20**	**2009**	30	30		**30**	

Facility Services Center

Year Built / Age 1985 / 38

Campus Square Footage 55,331

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1985**	**24**				
Facility Services Center - Foundation	**50**	**1985**	24	0		**12**	**Ongoing issues; only NW side worked on**
Facility Services Center - HVAC	**20**	**2005**	10	10	11%	**11**	**RTU; some new units in 2021**
Facility Services Center - HVAC - Controls	**20**	**2021**	90	90		**90**	**Controls = Allerton (2021)**
Facility Services Center - Ceiling and Lights	**20**	**2021**	90	90		**90**	**Outside shops not done**
Facility Services Center - Roof - Flat	**20**	**2005**	10	10	-50%	**5**	
Facility Services Center - Roof - Metal	**40**	**1985**	5	5	-50%	**3**	**Shops**
Facility Services Center - Electrical Switchgear	**30**	**2013**	67	67	-10%	**60**	
Facility Services Center - Fire Safety - Fire Alarm	**20**	**2021**	90	90		**90**	**EST 3**
Facility Services Center - Fire Safety - ERRS	-					-	
Facility Services Center - Fire Safety - Sprinkler System	**50**	**2021**	96	96		**96**	
Facility Services Center - Abv. Storage Tanks - Fuel	**20**	**2021**	90	90		**90**	
Facility Services Center - Generator	**40**	**2021**	95	95		-	**Generac - Diesel; 100 KW**
Facility Services Center - Flooring - Corridors	**20**	**2021**	90	90		**90**	**LVT**
Facility Services Center - Flooring - Multi Purpose	**20**	**2021**	90	90		**90**	**LVT**
Facility Services Center - Flooring - Offices	**30**	**2021**	93	93		**93**	**Sealed Concrete**
Facility Services Center - Flooring - Offices	**15**	**2021**	87	87		**87**	**Carpet**
Facility Services Center - Doors	**20**	**2021**	90	90		**90**	
Facility Services Center - Door Hardware	**20**	**2021**	90	90		**90**	
Facility Services Center - Casework (Built-Ins)	**20**	**2021**	90	90		**90**	
Facility Services Center - Restrooms	**20**	**2013**	50	50		**50**	**Ceramic Tile**
Facility Services Center - Marquee	**30**	**2011**	60	60		**60**	**New name plate 2021**
Facility Services Center - Paving - Parking Lots	**50**	**2013**	80	80		**80**	
Facility Services Center - Paving - Rear/Side Parking Lots	**50**	**2022**	98	98		**98**	
Facility Services Center - Paving - Sidewalks	**40**	**1985**	5	5		**5**	
Facility Services Center - Exterior Lighting	**20**	**2020**	85	85		**85**	**LED**
Facility Services Center - Paint - Commons	**15**	**2021**	87	87		**87**	
Facility Services Center - Paint - Exterior	**20**	**2005**	10	10		**10**	
Facility Services Center - Paint - Hallways	**20**	**2021**	90	90		**90**	
Facility Services Center - Dust Collector	**20**	**2019**	80	80		**80**	**Wood Shop; Replaced 1/24/19**

Purnell Transportation Center

Year Built / Age Unknown, Purchased **1979** / 44

Campus Square Footage **35,220**

Current Year **2023**

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted in orange are 2017 Bond; Blue are 2023 Bond
FACILITY AGE RATING	**50**	**1979**	**12**				**New Facility**
Purnell Transportation Cntr - HVAC	**20**	**1990**	-65	0		**-33**	
Purnell Transportation Cntr - HVAC - Controls	**20**	**1990**	-65	0		**-33**	**Controls = Alerton**
Purnell Transportation Cntr - Ceiling and Lights	**20**	**2021**	90	90		**90**	
Purnell Transportation Cntr - Roof - Metal	**30**	**2012**	63	63	-19%	**51**	
Purnell Transportation Cntr - Electrical Switchgear	**30**	**1979**	-47	0	12%	**-20**	
Purnell Transportation Cntr - Fire Safety - Fire Alarm	**20**	**2012**	45	45	10%	**49**	**Tied Security Alarm System**
Purnell Transportation Cntr - Fire Safety - ERRS							
Purnell Transportation Cntr - Fire Safety - Sprinkler System	**-**					**-**	
Purnell Transportation Cntr - Food Service Freezer	**20**	**2016**	65	65		**65**	**Backup Freezer**
Purnell Transportation Cntr - Food Service Freezer 1990	**20**	**2016**	65	65		**65**	**needs new freezer box**
Purnell Transportation Cntr - Generator	**-**					**-**	
Purnell Transportation Cntr - Und. Storage Tanks - Fuel	**30**	**1986**	-23	0		**-12**	**New Controls - 2018; 2 tanks 12,000 gallons each, both deisel**
Purnell Transportation Cntr - Flooring - Offices	**20**	**2019**	80	80		**80**	**VCT**
Purnell Transportation Cntr - Flooring - Corridors	**20**	**2019**	80	80		**80**	**VCT**
Purnell Transportation Cntr - Flooring - Warehouse	**50**	**1979**	12	12		**12**	**Concrete**
Purnell Transportation Cntr - Doors	**20**	**1996**	-35	0		**-18**	
Purnell Transportation Cntr - Door Hardware	**20**	**1996**	-35	0		**-18**	
Purnell Transportation Cntr - Casework (Built-Ins)	**20**	**1996**	-35	0		**-18**	
Purnell Transportation Cntr - Restrooms - Men	**20**	**1985**	-90	0		**-45**	**Bus Barn**
Purnell Transportation Cntr - Restrooms - Women	**20**	**1985**	-90	0		**-45**	**Bus Barn**
Purnell Transportation Cntr - Restrooms - Men	**20**	**2021**	90	90		**90**	**Old Distribution Center Side**
Purnell Transportation Cntr - Restrooms - Women	**20**	**2021**	90	90		**90**	**Old Distribution Center Side**
Purnell Transportation Cntr - Marquee / Signage	**-**					**-**	
Purnell Transportation Cntr - Paving - Parking Lots	**50**	**1979**	12	12		**12**	**Concrete; Gravel added and leveled in Spring of 2019**
Purnell Transportation Cntr - Paving - Sidewalks	**40**	**1979**	-10	5		**-3**	
Purnell Transportation Cntr - Exterior Lighting	**30**	**2020**	90	90		**90**	
Purnell Transportation Cntr - Paint - Commons Areas	**15**	**2022**	93	93		**93**	
Purnell Transportation Cntr - Paint - Exterior	**20**	**1985**	-90	0		**-45**	**Prefinish panels**

The Colony Bus Barn

Year Built / Age 2006 / 17

Campus Square Footage 5,001

Current Year 2023

Assessment Scale:

100 = New or Newly Replaced

0 = End of Life Cycle

	LIFE CYCLE - YEARS	LAST REPLACED	% LIFE REMAINING	VISUAL EVALUATION	WORK ORDER HISTORY	TOTAL ASSESSMENT	Type of Material / Notes - Items highlighted Blue are 2023 Bond
FACILITY AGE RATING	**50**	**2006**	**66**				
The Colony Bus Barn - HVAC	**20**	**2006**	15	15	-50%	**8**	**RTU; 2 heaters added in garage 2020**
The Colony Bus Barn - HVAC - Controls	**-**	**-**				**-**	
The Colony Bus Barn - Ceiling and Lights	**20**	**2006**	15	15		**15**	
The Colony Bus Barn - Roof - Metal	**30**	**2006**	43	43	-3%	**42**	
The Colony Bus Barn - Electrical Switchgear	**30**	**2006**	43	43	-50%	**22**	
The Colony Bus Barn - Fire Safety - Fire Alarm	**20**	**2006**	15	15	-17%	**12**	**Edwards EST 2 - Limited Parts**
The Colony Bus Barn - Fire Safety - ERRS	**-**					**-**	
The Colony Bus Barn - Fire Safety - Sprinkler System	**-**					**-**	
The Colony Bus Barn - Generator	**-**					**-**	
The Colony Bus Barn - Abv. Storage Tanks - Fuel	**50**	**2006**	66	66		**66**	
The Colony Bus Barn - Flooring - Offices	**20**	**2006**	15	15		**15**	**VCT**
The Colony Bus Barn - Flooring -Break Rooms	**20**	**2006**	15	15		**15**	**Carpet and VCT**
The Colony Bus Barn - Garage Floor	**20**	**2018**	75	75		**75**	**Garage floor - Epoxy**
The Colony Bus Barn - Doors	**20**	**2006**	15	15		**15**	
The Colony Bus Barn - Door Hardware	**20**	**2006**	15	15		**15**	
The Colony Bus Barn - Casework (Built-Ins)	**20**	**2006**	15	15		**15**	
The Colony Bus Barn - Restrooms - Men	**20**	**2006**	15	15		**15**	**Ceramic tile 2x2 floor, 4x4 wall, solid plastic partitions**
The Colony Bus Barn - Restrooms - Women	**20**	**2006**	15	15		**15**	**Ceramic tile 2x2 floor, 4x4 wall, solid plastic partitions**
The Colony Bus Barn - Marquee / Signage	**-**					**-**	
The Colony Bus Barn - Paving - Parking Lots	**50**	**2006**	66	66		**66**	**Concrete**
The Colony Bus Barn - Paving - Sidewalks	**40**	**2006**	58	58		**58**	
The Colony Bus Barn - Exterior Lighting	**30**	**2006**	43	43		**43**	**Retro LED bulbs**
The Colony Bus Barn - Paint - Commons Areas	**15**	**2020**	80	80		**80**	
The Colony Bus Barn - Paint - Exterior	**20**	**2006**	15	15		**15**	